



IP Home App Controller Module for WGAP864 Quick Guide

Introduction

The Watchguard IP Module is an add-on module for the WGAP864 Alarm Panel. The module will allow 2 way remote communications between the alarm panel and a smart phone or tablet, using the free HYYP mobile app.





Product Code: WGAP864IPM

1.Installation


1.1. Wiring

Connect the IP Module's 12V input to the TX connectors of the WGAP864 panel. Be sure to connect the 12V to positive and GND to Negative.

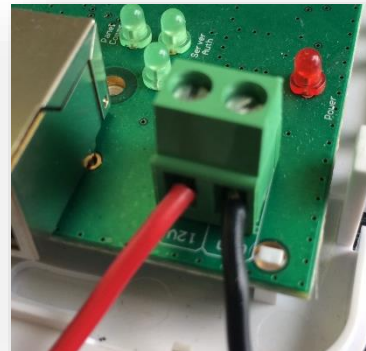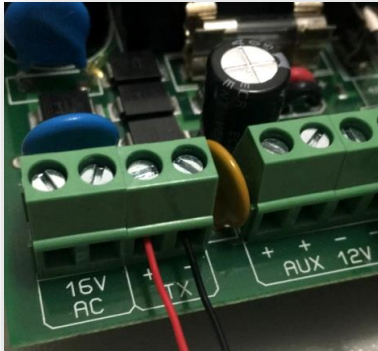

Connect the provided serial cable from the serial connector on the WGAP864 panel to the serial connector on the IP Module.

Tip: The red wire on the WGAP864 panel should be closest to the panel's heat sink.

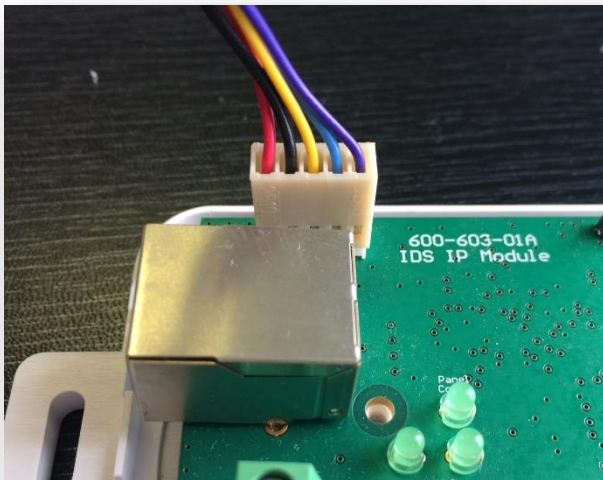

Plug in the Ethernet cable from the network to the Ethernet connector.

NB: The IP Module can only get an IP address from a DHCP server. You cannot give it a static IP address.



1.2. Programming

Location 196 is needed if you want to use the HYYP Home app, reporting should still work without location 196 programmed.

- Enter Installer Code [1][8][3][5][*]
- Go to location 196 [1][9][6][*]
- Enter any six digit code [1][2][3][4][5][6][*] *(This is to authorise the HYYP serial connection)*
- Go to location 61 [6][1][*] *(This is the partition's account code: 61 – Partition 1; 62 – Partition 2; 63 – Partition 3...)*
- Enter the account code issued by the control room [1][2][3][4][*]
- Exit installer programming [#]

1.3. HYYP Home App

To add the IP Module to the HYYP Home app you must enter location 196 when the app asks you to synchronise the device.

Give your IP Module a name and choose a site colour. The site colour will help distinguish between multiple sites.

Click 'Next'.

The screenshot shows the 'Step 1' setup screen of the HYYP Home App. At the top, it says 'Step 1' and 'Please start by entering in the name of your site and selecting a site color'. Below this is a text input field containing 'e.g. Home' with a checkmark icon to its right. Underneath the input field is a 'Site Color' label next to a green rectangular color swatch, with a blue square swatch visible to its right. A large, empty light gray rectangular area occupies the middle of the screen. At the bottom, there is a green rectangular button labeled 'NEXT'.

Enter the IP Module Unique number.

Click 'Next'.


Enter a 6 digit code into location 196 on the WGAP864 Panel.

Fill in details of where the HYYP Hub is installed.

Click 'Next'.

Step 2

Enter or scan the unique identifier found on your HYYP Unit.


Scan Barcode

NEXT

Step 4

Where device is installed

Address Line 1

✓

Address Line 2

✓

City

✓

Province

✓

South Africa


✓

Area code

✓

NEXT

Your IP Module has successfully been synced with the HYYP Home app.

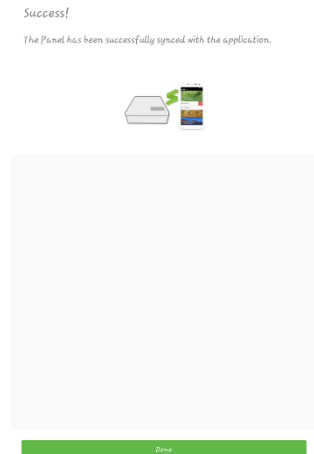

Click 'Done'.

2. LEDs

The IP Module has 4 LEDs that you can use to view its status.

Power LED – On when the IP Module has sufficient power.

Panel Comms LED – Flashes when communicating with the WGAP864 Panel.

Network Comms LED – Flashes when communicating on the network.

Server Auth LED – On when connected to the HYYP platform.

On power up the Network Comms and Server Auth LEDs will flash together, and once it has made a successful connection to the HYYP platform the Server Auth LED will stay on and the Network Comms LED will flash when it's communicating on the network.

If the Server Auth and Network Comms LEDs continue to flash the same number then there is an error on the HYYP IP Connect Module. You can determine the error by the amount of times the LEDs flash.

See error numbers below:

- 1 – System error – *Replace unit.*
- 2 – Can't initialise Ethernet port.
- 3 – Can't get IP address from DHCP server.
- 4 – Can't connect to the Time server.
- 5 – Unable to log on to the HYYP platform.
- 6 – Unable to register on the HYYP platform.

