




# Fast surveillance networks.

**VSPoE Series: Available in 8, 16 and 24 port switches, midspan & extender**

The VSPoE Power over Ethernet series comprises 10/100Mbps PoE switches in 8, 16 & 24 port configurations, as well as easy to use PoE midspan/extender combination. Enjoy reliability & speed, perfect for surveillance networks.

- 100Mbps PoE downlink ports & Gigabit uplink ports
- PoE, PoE+ and Hi-PoE support for up to 60W PoE
- Easy switch remote management (16 & 24 port only)
- Port rate control, VLAN, security, PoE output & more
- 300m max transmission via midspan and extender
- PoE midspan with Hi-PoE support & DIN mounting
- PoE extender provides PoE for up to 3 IP cameras
- DIN rail and rackmount cabinet installation options

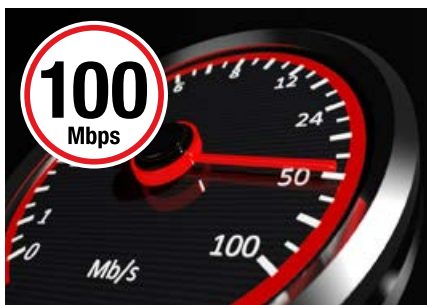

**Up to 100Mbps PoE+ Downlink Ports**



**PoE+ and Hi-PoE Support Models**



**Gigabit (1000M) Uplink Ports**

## Standard PoE Switches | VSPOE-SW Series Specifications

Model	VSPOE-SW8	VSPOE-SW16	VSPOE-SW24
Series			
	Series Name: VSPOE-SW Series Power Over Ethernet Switches		
Specifications	Ethernet Ports: 1 x 1000 Base-X, 1 x 10/100/1000 Base-T, 8 x 10/100 Base-T (PoE power supply ports)		
	Remote Management: N/A		
	Switch Power Load: Per port: ≤30W, Total: ≤93W		
	PoE Protocol: PoE (IEEE802.3af) / PoE+ (IEEE802.3at)		
	Exchange Mode: Store & forward		
	Operating Environment: -30° ~ 65°C / RH90% (max)		
	Weight: 0.54kg		
	Dimensions: 150 x 100 x 42mm		

## Hi-PoE Capable PoE Switches | VSPOE-SWA Series Specifications

Model	VSPOE-SWA8	VSPOE-SWA8G	VSPOE-SWA16	VSPOE-SWA24
Series				
	Series Name: VSPOE-SWA Series Power Over Ethernet Switches with Hi-PoE Support			
Specifications	Ethernet Ports: 1 x 10/100 Base-T, 8 x 10/100 Base-T (PoE power supply ports)			
	Remote Management: N/A			
	Switch Power Load: Port 1: ≤60W, Port 2 ~ 8: ≤30W, Total: ≤96W			
	PoE Protocol: PoE (IEEE802.3af) / PoE+ (IEEE802.3at) / Hi-PoE			
	Exchange Mode: Store & forward			
	Operating Environment: -10° ~ 55°C / RH90% (max)			
	Mounting Options: N/A			
	Weight / Dimensions: 0.48kg / 190 x 100 x 42mm			

## Hi-PoE Capable PoE Switches | VSPOE-SWA Series Specifications

Model	VSPOE-MS
Specifications	
	Ethernet: 1 x 10/100/1000M Base-T, 1 x 10/100/1000M Base-T (PoE power supply)
	PoE Power Supply: 60W Hi-PoE support
	Indicators: Power indicator / PoE status indicator
	Exchange Mode: Store & forward
	Operation Environment: -30° ~ 65°C / 10 ~ 90% RH (max.)
	Weight / Dimensions: 0.39kg / 150 x 70 x 39mm

Model	VSPOE-EX
Specifications	
	Ethernet: 1 x 10/100 Base-T PoE power receiving port, 1 x 10/100 Base-T PoE port for add. extender power supply, 1 x 10/100 Base-T PoE port for IP camera power supply
	Transmission Distance: Up to 3 IP surveillance cameras (power consumption < 8W), 300m maximum transmission distance
	Power Consumption: < 3W
	Operation Environment: -30° ~ 65°C / 10 ~ 90% RH (max.)
	Weight / Dimensions: 0.06kg / 79 x 52 x 23mm

Your local VIP Vision™ IP solutions professional: