

Professional Series 1080p Fixed HDCVI Mini Bullet

Model: VSCVI2MPFBIRV3




Making analogue upgrade installations easy. Enjoy up to 5 times the resolution of D1 analogue cameras by upgrading with the Securview 1080p Full HD fixed-lens range.

Camera Features

- Streams Full HD 1080p/2.0MP (1920 x 1080)
- Fixed 3.6mm lens; 88° viewing angle
- Up to 500m HD video transmission over coax
- Infrared illumination up to 40m
- IP67 rated for weather resistance
- HD/SD switchable output for analogue DVRs
- Digital WDR and 2D/3D noise reduction
- Compact size with adjustable mount
- All metal construction

Model	VSCVI2MPFBIRV3
General	
Camera Style	Weather Resistant Bullet
Image Sensor	1/2.8" 2.4 Megapixel CMOS
Effective Pixels	1984 (H) x 1225 (V)
Signal Noise Ratio	> 50dB
Camera	
Lens	3.6mm Fixed Lens
Angle of View	88°
Electronic Shutter	1/3 ~ 1/100,000s
Minimum Illumination	0.05 Lux at F1.2 (Colour) / 0 Lux IR Active
Day/Night	Auto (ICR) / Colour / B&W
White Balance	Auto
Noise Reduction	2D / 3D
Gain Control	Auto
Backlight Compensation	BLC / HLC / DWDR
Audio Input	N/A
Transmission Distance	Over 500m via 75-3 coaxial cable
Synchronisation	Internal
OSD Menu	Support
Alarm Interface	N/A
Video	
Video Compression	H.264 / MJPEG
Resolution	1080p (1920 x 1080) to CIF (352 x 288)
Frame Rate	25fps (1080p and lower)
Video Output	BNC CVI HD output / CVBS SD output (switchable)
Environment	
Ingress Protection	IP67
Vandal Resistant	No
Maximum Infrared Range	40m
Power Input	12VDC
Power Consumption	< 5.5W
Dimensions	180 x 70 x 70mm
Weight	0.40kg
Operating Environment	-30° to 60°C / RH95% (max)
Product Diagram	

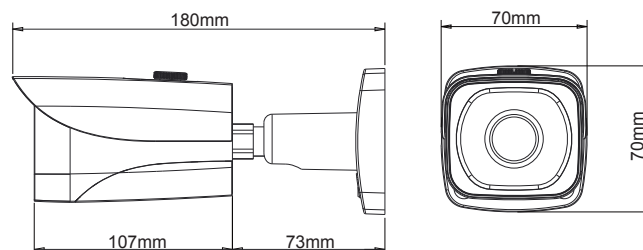

Compatible Accessories

Accessories sold separately, additional adapters may be required.



VSBKTA121



VSBKTA152

Your local Securview™ professional:

Professional Series 1080p Fixed HDCVI Mini Dome

Model: VSCVI2MPVDIR



Making analogue upgrade installations easy. Enjoy up to 5 times the resolution of D1 analogue cameras by upgrading with the Securview 1080p Full HD fixed-lens range.

Camera Features

- Streams Full HD 1080p/2.0MP (1920 x 1080)
- Fixed 3.6mm lens; 88° viewing angle
- Up to 500m HD video transmission over coax
- Infrared illumination up to 30m
- IP66/IK10 for weather & vandal resistance
- HD/SD switchable output for analogue DVRs
- Auto white balance & 3D noise reduction
- Compact size with adjustable inner body
- Metal body with vandal dome cover

Compatible Accessories


Accessories sold separately, additional adapters may be required.



VSBKTB200W

VSBKTA152

Model	VSCVI2MPVDIR
General	
Camera Style	Vandal Resistant Dome
Image Sensor	1/2.8" 2.4 Megapixel CMOS
Effective Pixels	1984 (H) x 1225 (V)
Signal Noise Ratio	> 50dB
Camera	
Lens	3.6mm Fixed Lens
Angle of View	88°
Electronic Shutter	1/3 ~ 1/100,000s
Minimum Illumination	0.05 Lux at F1.2 (Colour) / 0 Lux IR Active
Day/Night	Auto (ICR) / Colour / B&W
White Balance	Auto
Noise Reduction	2D / 3D
Gain Control	Auto
Backlight Compensation	BLC / HLC / DWDR
Audio Input	N/A
Transmission Distance	Over 500m via 75-3 coaxial cable
Synchronisation	Internal
OSD Menu	Support
Alarm Interface	N/A
Video	
Video Compression	H.264 / MJPEG
Resolution	1080p (1920 x 1080) to CIF (352 x 288)
Frame Rate	25fps (1080p and lower)
Video Output	BNC CVI HD output / CVBS SD output (switchable)
Environment	
Ingress Protection	IP66
Vandal Resistant	IK10
Maximum Infrared Range	30m
Power Input	12VDC
Power Consumption	< 4.0W
Dimensions	Ø110 x 81mm
Weight	0.30kg
Operating Environment	-30° to 60°C / RH95% (max)
Product Diagram	

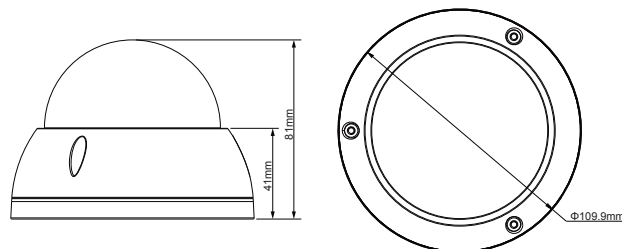

Product Variants by Model

VSCVI2MPVDIR6	6.0mm fixed lens, 53° viewing angle
---------------	-------------------------------------

Your local Securview™ professional:

1080p Full HD 20m Infrared HDCVI Dome Camera

Model: VSCVI2MPVDIR6



FIXED



300m
MAX. DISTANCE



IK10 RATED



DAY/NIGHT

Product Overview



The Securview Victory Series VSCVI2MPVDIR is a 2.4 megapixel, fixed lens, infrared dome camera and is capable of providing 1080p Full High Definition footage over coaxial cable.

It uses the HDCVI video transmission standard which enables HD video transmission distance up to 300m (1080p using 75-3 coax) with low latency and low interference.

The camera's IK10 vandal resistance and IP66 rating make it a perfect surveillance solution across a wide range of CCTV applications.

This camera is only compatible with digital video recorders in the Securview Victory Series.

Specifications		
General	Camera Style	Vandal Resistant Dome
	Image Sensor	1/2.8" 2.4 Megapixel CMOS
	Effective Pixels	1984 (H) x 1225 (V)
	Signal Noise Ratio	> 50dB
Camera	Lens	6mm Fixed Lens
	Angle of View	53.4°
	Electronic Shutter	1/3 ~ 1/100,000s
	Minimum Illumination	0.05 Lux at F1.2 (Colour) / 0 Lux IR Active
	Day/Night	Auto (ICR) / Colour / B&W
	White Balance	Auto
	Noise Reduction	2D / 3D
	Gain Control	Auto
	Backlight Compensation	BLC / HLC / DWDR
	Audio Input	N/A
	Audio Compression	N/A
	Transmission Distance	Over 300m via 75-3 coaxial cable
	Synchronisation	Internal
	OSD Menu	Support
	Alarm Interface	N/A
Video	Video Compression	H.264 / MJPEG
	Resolution	1080p (1920x1080) / 720p (1280x720) / D1 (704x576)
	Frame Rate	1080p / 720p (25fps)
	Video Output	BNC CVI HD output / CVBS SD output (switchable)
Environment	Ingress Protection	IP66
	Vandal Resistant	IK10
	Maximum Infrared Range	20m
	Power Input	DC12V±10%
	Power Consumption	< 4.0W
	Dimensions	Ø110 x 81mm
	Weight	0.30kg
	Operating Environment	-30° to 60°C / RH95% (max)

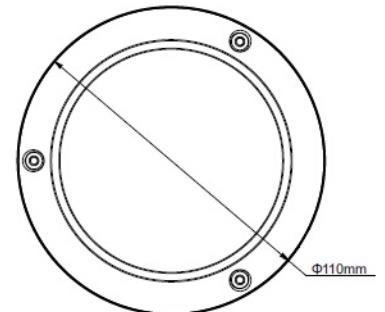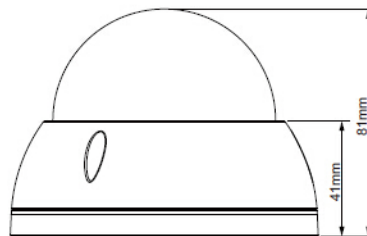

Your Securview Victory Series dealer: