

Professional Series 1080p Motorised HDCVI Dome

Model: VSCVI2MPFBIRM




A strong performer in all conditions, the Professional Series from Securview offers Full HD 1080p streaming with the convenience of a motorised varifocal lens.

Camera Features

- Streams Full HD 1080p/2.0MP (1920 x 1080)
- Motorised 2.7 ~ 12mm lens, fixed iris
- 99° ~ 34° horizontal viewing angles
- Up to 500m HD video transmission over coax
- Infrared illumination up to 30m
- IP66 rated for weather resistance
- HD/SD switchable output for analogue DVRs
- Auto white balance & 3D noise reduction
- Adjustable ball-socket bracket mount

Model	VSCVI2MPFBIRM
General	
Camera Style	Weather Resistant Bullet
Image Sensor	1/2.8" 2.4 Megapixel CMOS
Effective Pixels	1984 (H) x 1225 (V)
Signal Noise Ratio	> 50dB
Camera	
Lens	2.7 ~ 12mm Motorised Lens; Fixed Iris
Angle of View	99° (wide) ~ 34° (tele)
Electronic Shutter	1/3 ~ 1/100,000s
Minimum Illumination	0.05 Lux at F1.2 (Colour) / 0 Lux IR Active
Day/Night	Auto (ICR) / Colour / B&W
White Balance	Auto
Noise Reduction	2D / 3D
Gain Control	Auto
Backlight Compensation	BLC / HLC / DWDR
Audio Input	N/A
Transmission Distance	Over 500m via 75-3 coaxial cable
Synchronisation	Internal
OSD Menu	Support
Alarm Interface	N/A
Video	
Video Compression	H.264 / MJPEG
Resolution	1080p (1920 x 1080) to CIF (352 x 288)
Frame Rate	25fps (1080p and lower)
Video Output	BNC CVI HD output / CVBS SD output (switchable)
Environment	
Ingress Protection	IP66
Vandal Resistant	No
Maximum Infrared Range	30m
Power Input	12VDC
Power Consumption	< 7.5W
Dimensions	213 x 80 x 72mm
Weight	0.55kg
Operating Environment	-30° to 60°C / RH95% (max)
Product Diagram	

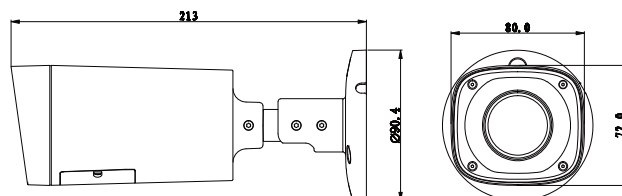

Compatible Accessories

Accessories sold separately, additional adapters may be required.



VSBKTA122



VSBKTA152

Your local Securview™ professional:

Professional Series 1080p Motorised HDCVI Dome

Model: VSCVI2MPVDIRM




A strong performer in all conditions, the Professional Series from Securview offers Full HD 1080p streaming with the convenience of a motorised varifocal lens.

Camera Features

- Streams Full HD 1080p/2.0MP (1920 x 1080)
- Motorised 2.7 ~ 12mm lens, fixed iris
- 99 ~ 34° horizontal viewing angles
- Up to 500m HD video transmission over coax
- Infrared illumination up to 30m
- IP66/IK10 for weather & vandal resistance
- HD/SD switchable output for analogue DVRs
- Auto white balance & 3D noise reduction
- Adjustable inner dome body

Model	VSCVI2MPVDIRM
General	
Camera Style	Vandal Resistant Dome
Image Sensor	1/2.8" 2.4 Megapixel CMOS
Effective Pixels	1984 (H) x 1225 (V)
Signal Noise Ratio	> 50dB
Camera	
Lens	2.7 ~ 12mm Motorised Lens; Fixed Iris
Angle of View	99° (wide) ~ 34° (tele)
Electronic Shutter	1/3 ~ 1/100,000s
Minimum Illumination	0.05 Lux at F1.2 (Colour) / 0 Lux IR Active
Day/Night	Auto (ICR) / Colour / B&W
White Balance	Auto
Noise Reduction	2D / 3D
Gain Control	Auto
Backlight Compensation	BLC / HLC / DWDR
Audio Input	N/A
Transmission Distance	Over 500m via 75-3 coaxial cable
Synchronisation	Internal
OSD Menu	Support
Alarm Interface	N/A
Video	
Video Compression	H.264 / MJPEG
Resolution	1080p (1920 x 1080) to CIF (352 x 288)
Frame Rate	25fps (1080p and lower)
Video Output	BNC CVI HD output / CVBS SD output (switchable)
Environment	
Ingress Protection	IP66
Vandal Resistant	IK10
Maximum Infrared Range	30m
Power Input	12VDC
Power Consumption	< 9.6W
Dimensions	Ø122 x 89mm
Weight	0.45kg
Operating Environment	-30° to 60°C / RH95% (max)
Product Diagram	

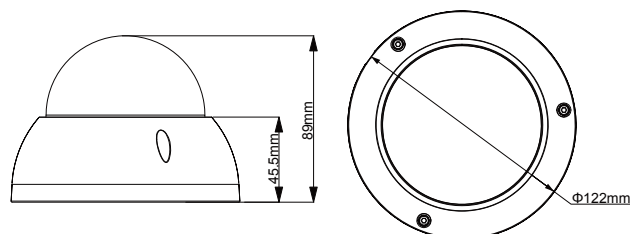

Compatible Accessories

Accessories sold separately, additional adapters may be required.



VSBKT200W

VSBKTA152

Your local Securview™ professional: