



Small profile, high detail.


Professional Series: Fixed lens HDCVI bullets available in 2.0MP & 4.0MP

High performance fixed-lens surveillance in a compact body. Each bullet in this series offers professional features to take your surveillance to the next level, including true WDR, dual video outputs and smart infrared.

- Stream up to 4.0MP (2560 x 1440) at 25fps
- Fixed 2.8/3.6mm lens with wide viewing angles
- Up to 700m video transmission over coaxial cable
- Smart infrared illumination, up to 40m range
- Dual BNC outputs for HD and composite video
- True WDR (120dB) and 2D/3D noise reduction
- IP67 rated weather resistant metal housing
- Compact bullet, ideal for under eaves, walls, etc.



Up to 9x Image Resolution vs D1

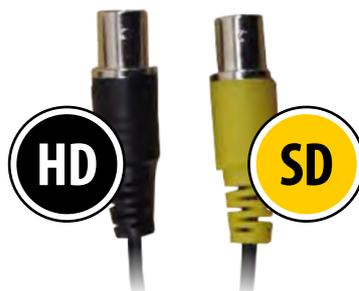

Dedicated HD / SD Outputs



Weather Resistant Housing

Model	VSCVI2MPFBIRV4	VSCVI4MPFBIR / 2.8	
Image Sensor	1/2.7" 2.1 Megapixel CMOS	1/3" 4.1 Megapixel CMOS	
Effective Pixels	1928 (H) x 1088 (V)	2688 (H) x 1520 (V)	
Signal Noise Ratio	> 50dB	> 65dB	
Lens	3.6mm F2.0 Fixed Lens	3.6mm F1.5 Fixed Lens / 2.8mm F1.5 Fixed Lens	
Angle of View	90°	79° / 99.7°	
Focus	Fixed / 0.8m Min. Focus Distance	Fixed / 1.5m Min. Focus Distance	
Minimum Illumination	0.03 Lux at F2.0 (Colour) / 0 Lux IR Active	0.01 Lux at F1.5 (Colour) / 0 Lux IR Active	
Electronic Shutter	1/3 ~ 1/300,000s	1/4 ~ 1/100,000s	
Day/Night	Auto (ICR) / Colour / B&W	Auto (ICR) / Manual	
Infrared Range	40m		
White Balance	Auto / Manual		
Noise Reduction	2D / 3D		
Gain Control	Auto		
Lighting Compensation	BLC / HLC / WDR (120dB)		
Resolution	1080p (1920 x 1080) to CIF (352 x 288)	4.0MP (2560 x 1440) to CIF (352 x 288)	
Frame Rate	25fps (1080p and lower)	25fps (4.0MP), 25fps (1080p and lower)	
Transmission Distance	Rated for up to 700m via 75-3 coaxial cable (performed in ideal test conditions)		
Audio Input	N/A		
Alarm Interface	N/A		
Video Output	2 x BNC video output (1 x HDCVI / 1 x Composite SD)		
Synchronisation	Internal		
OSD Menu	Support		
Ingress Protection	IP67		
Vandal Resistant	N/A		
Housing	Metal		
Power Input	12VDC		
Power Consumption	< 5.5W	< 5.9W	
Dimensions	180 x 70 x 70mm		
Weight	0.40kg		
Operating Environment	-30° to 60°C / RH95% (max)		
Diagram			
Accessories			
Models	Junction Box (VSBKTA121)	Pole Mount (VSBKTA121 + VSBKTA152)	Corner Mount (VSBKTA121 + VSBKTA152)

Your local Securview™ HDCVI solutions professional: