

Vehicle Camera - Installation Manual

Package includes:

- 1 x Vehicle camera
- 1 x Set of installation cables
- 1 x Installation manual

Model	MSCAM-B18	MSCAM-BF18	MSCAM-FI18	MSCAM-BI28	MSCAM-S28
					
Camera Style	Bullet, Mirrored	Bullet, Mirrored	Bullet, Mirrored	Bullet, Mirrored	Bullet, Mirrored
Effective Pixels	656 (H) x 492 (V)	656 (H) x 492 (V)	648 (H) x 488 (V)	648 (H) x 488 (V)	640 (H) x 480 (V)
Maximum Infrared Range	N/A	N/A	5m	5m	N/A

Model	MSCAM-NPI	MSCAM-TI	MSCAM-MD	MSCAM-MDA
				
Camera Style	Number Plate, Mirrored	Heavy Duty, Mirrored	Dome, Not Mirrored	Dome, Not Mirrored
Effective Pixels	640 (H) x 480 (V)	640 (H) x 480 (V)	640 (H) x 480 (V)	960 (H) x 582 (V)
Maximum Infrared Range	5m	30m	5m	5m

Disconnect the battery prior to doing electrical work on the vehicle.

1. For screw-mounted cameras


Using a power drill, drill screw holes in the body where the camera will be fitted, then mount the camera with screws.

2. Connect the camera's power cable to an available 12V positive power source and the ground wire (black) to a suitable ground point in the vehicle.

For keyhole cameras


Using a power drill, drill a round hole into the body with the included hole saw bit, and insert the camera.

3. Connect the camera's video cable to the monitor's corresponding channel cable.

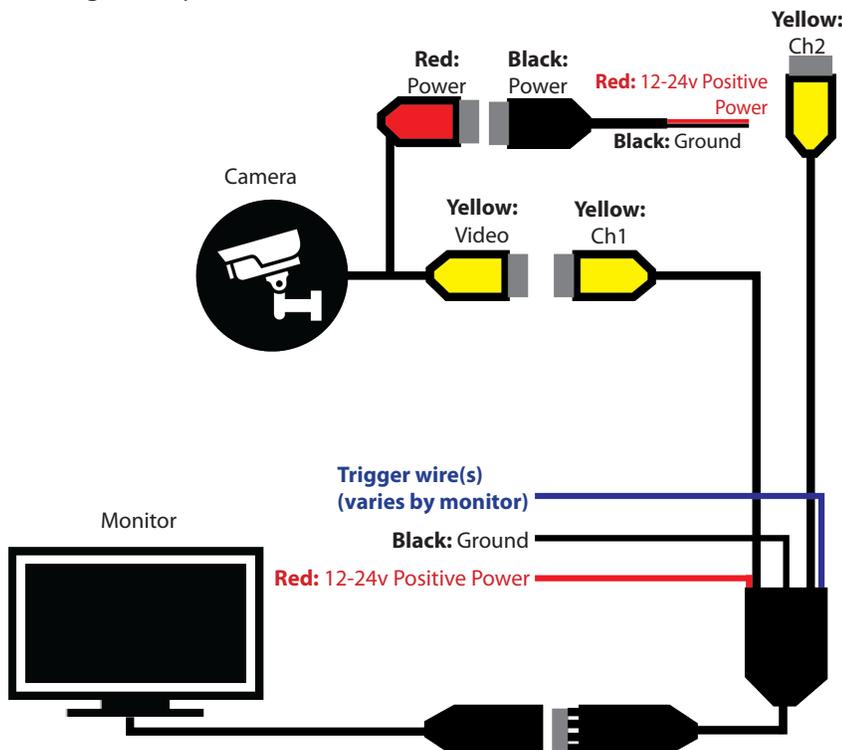

Camera/monitor position example:

- A:** Monitor position (Dashboard)
- B:** Camera position (Mirrored cam ONLY)
- C:** Camera trigger (Connect to the switch side of reverse light)

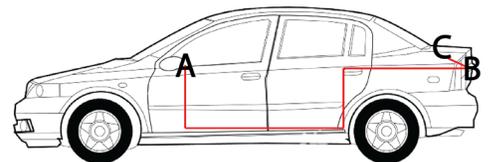

Test reverse camera auto-activation:

1. Engage the park brake and turn the ignition key on, without starting the vehicle.
2. Select the reverse gear with the gear shift. If wired correctly, the monitor should automatically display the reverse camera's feed.

*Actual cables may differ depending on monitor and camera models