



## Linkable LED Strip Lighting



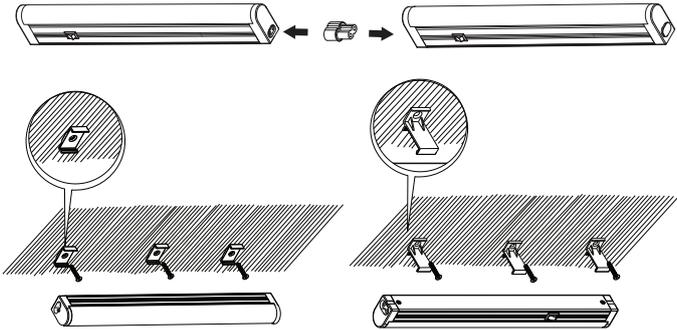
LEDBR Series: 13W in two colour temperatures, with surface & right angle brackets

The ENSA™ LED linkable strip light range offers energy efficient lighting in a uniquely versatile, slim package. Connect three LED strip lights together for a maximum 3.5m length LED light strip.

Each linkable strip light comes standard with light connectors, connector safety caps, and surface mount and right angle mount clips. The simple mounting clips enable implementation of the linkable strip light across a wide variety of applications including shelf and cabinet lighting, accent lighting, recessed wall-wash lighting and more.

- Unique, energy efficient linkable LED strip lighting.
- Connect up to 3 lights together; easy on/off switch.
- 78lm/W luminous efficacy & 30,000 hours service life.
- Available in 3000K warm white and 6500K cool white.
- Right angle & surface clips enable rapid light installation.
- Wide 135° beam angle and >80 colour rendering index.

## Series Specifications

<b>Model</b>	LEDBR13W65K / LEDBR13W3K													
<b>Product Image</b>														
<b>Series Name</b>	LEDBR Series: Linkable LED Lighting													
<b>Optical</b>														
<b>Light Output</b>	1050lm													
<b>Luminous Efficacy</b>	78lm/W													
<b>Colour Temperature</b>	3000K warm white / 6500K cool white													
<b>Colour Rendering Index</b>	> 80													
<b>Beam Angle</b>	135°													
<b>Light Decay</b>	<10% at 6,000 hours													
<b>Rated Lifespan</b>	> 30,000 hours													
<b>Electrical</b>														
<b>Power Consumption</b>	13.5W													
<b>Input Voltage</b>	220 ~ 240VAC (50 ~ 60Hz)													
<b>Power Factor</b>	> 0.5													
<b>Dimmable</b>	N/A													
<b>General</b>														
<b>Plug / Socket / Base</b>	3-pin AC plug													
<b>Reflector / Diffuser</b>	Frosted diffuser													
<b>Housing Construction</b>	Polycarbonate & aluminium													
<b>Operating Environment</b>	-25° ~ +40°C													
<b>Dimensions</b>	1170 x 25 x 35mm													
<b>Photometry</b>														
<b>Illuminance at a Distance</b>	<table border="1"> <thead> <tr> <th>Centre Beam Avg (lx)</th> <th>Beam Diameter (m)</th> </tr> </thead> <tbody> <tr> <td>257</td> <td>1.73</td> </tr> <tr> <td>64</td> <td>3.46</td> </tr> <tr> <td>29</td> <td>5.19</td> </tr> <tr> <td>16</td> <td>6.93</td> </tr> <tr> <td>10</td> <td>10.39</td> </tr> </tbody> </table>	Centre Beam Avg (lx)	Beam Diameter (m)	257	1.73	64	3.46	29	5.19	16	6.93	10	10.39	
Centre Beam Avg (lx)	Beam Diameter (m)													
257	1.73													
64	3.46													
29	5.19													
16	6.93													
10	10.39													
	<b>Luminous Light Distribution</b>													
<b>Diagrams</b>														
<b>Mounting Options</b>														

Your local ENSA™ lighting solutions professional: