



ENSATM

Energy Saving Devices

Achieve more with less.

ENSATM practical energy efficiency solutions for a brighter future.

At no time in history has energy efficiency been more important.

The International Energy Agency states that lighting represents almost 20% of global electricity consumption. As energy demand increases with the rising global population, becoming energy efficient is vital in creating a sustainable and prosperous future for all.



ENSATM Energy Saving Devices

We believe energy efficiency is key to creating a richer society, with happier and safer communities, and more productive workplaces. ENSA is dedicated to delivering energy efficiency to enhance the quality of life of future generations.

ENSA is committed to building healthier environments through energy efficiency. By using less, we aim to achieve more: reducing energy consumption & pollution, minimising harm to the environment and saving on precious natural resources. With ENSA products, you are choosing:

- Efficient lights that reduce energy consumption & harmful emissions.
- Lights with exceptional service life that minimise waste from re-lamping.
- Recyclable lights that do not contain toxic materials such as mercury.

Practical energy efficiency solutions

At ENSA, we understand the complexities of lighting upgrades. Production interruptions, equipment hire, increased operational expenses, and labour costs make it essential for upgrades to be reliable and perform as intended from day one.

The ENSA LED lighting and energy saving devices range comprises practical energy efficiency solutions, designed for fast installation, power consumption reduction and improved lighting performance.

The ENSA range includes industrial grade fixtures such as high bays, street lighting, flood lighting and canopy lighting. It features a wide range of lights, such as LED tubes, downlights and panel lights, that

are ready for commercial, shop fit-out and residential applications.

Products also include backup battery LED lights for emergency lighting and intelligent lighting and sensors to compound your energy saving.

LED lighting is the lighting technology for the future and ENSA is at the forefront of the field. Our products incorporate the latest in LED lighting technology to ensure each light offers excellent efficiency, light quality and service life.

To see our full product range, case studies or to find a reseller, please visit: **www.ensalife.com**





Contents

ENSA™ LED lighting and energy saving solutions



High Bay Lighting

Professional high bay lighting ideal for industry, warehousing and more.



Flood Lighting

High power residential, commercial and industrial grade LED flood lighting.



Street Lighting

High efficiency, modular LED street lighting for roads, walkways and public spaces.



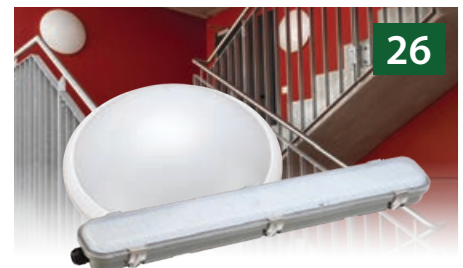
Canopy Lighting

Low bay LED lighting for petrol stations, car parks, industrial lighting & more.



Panel Lighting

Minimalist fluorescent troffer replacements for use in the office or workplace.



Intelligent Lighting

Smart sensor-equipped oyster & batten lights with battery backup for emergency.



Tube & Link Lighting

Energy efficient LED tubes with option for microwave sensor models.



Downlighting

Comprehensive downlight selection in premium and standard series.



Retrofit Lighting

Wide range of energy efficient easy replacement LED bulbs and globes.



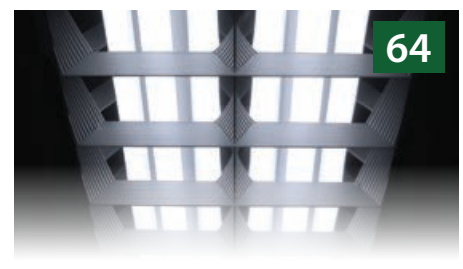
Energy Saving Switches

Microwave & PIR sensor switches and mains voltage receivers for light control.



Daylight Harvesting

Intelligent energy management systems to optimise your lighting use.



Appendix

Guide to equivalent lighting technologies, colour temperatures and glossary.



Professional LED High Bay Lighting



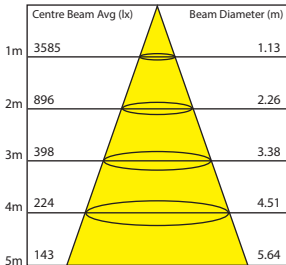
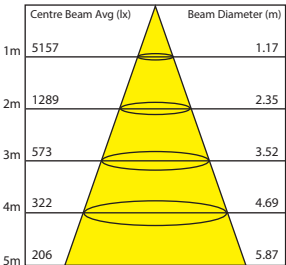
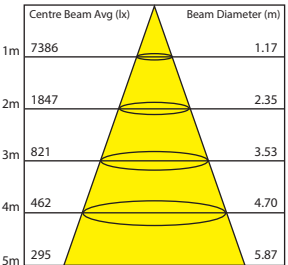
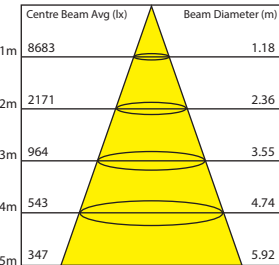
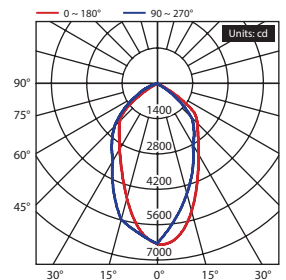
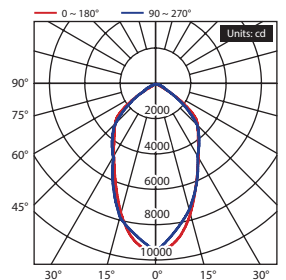
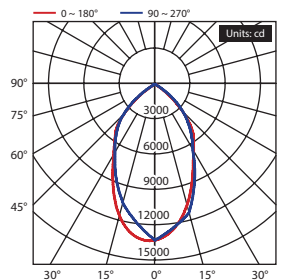
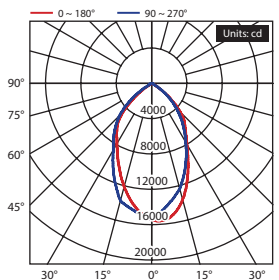
LHB-A Series: Aluminium reflector high bays in 80W, 120W, 160W and 200W models

The ENSA™ LHB-A Series of professional LED high bay lighting comprises energy efficient bay lighting built for demanding industrial and commercial environments. Each model features an innovative aluminium heatsink for optimal heat dissipation and Samsung LEDs for reliability and performance. The series is ideal for exhibition halls, manufacturing facilities, warehouses, large retail and more.

The LHB-A series is also compatible with the ENSA-MS5, the microwave motion sensor switch designed for high bay use.

- High efficiency, low energy use LED high bay light
- Effective lighting in high ceiling environments up to 15m
- Excellent colour rendering, LED lifespan and light output
- Superior build quality and thermal management
- Standard in 6500K cool white with 60° beam angle
- Includes aluminium reflector and mounting eyelet

Series Specifications

Model	LHB-A80		LHB-A120		LHB-A160		LHB-A200	
Product Image								
Seres Name	LHB-A Series: Professional LED High Bay Lights							
Optical								
Light Output	8500lm		12500lm		16000lm		20000lm	
Luminous Efficacy	105lm/W		105lm/W		100lm/W		100lm/W	
Colour Temperature	6500K							
Colour Rendering Index	> 80							
Beam Angle	60°							
Light Decay	<3% at 6,000 hours							
Rated Lifespan	50,000 hours							
Electrical								
Power Consumption	80W		120W		160W		200W	
Input Voltage	100 ~ 240VAC							
Power Factor	> 0.95							
Dimmable	N/A							
General								
Ingress Protection	IP20							
Plug / Socket / Base	3-pin AC plug							
Reflector / Diffuser	Aluminium reflector / Frosted diffuser							
Housing Adjustments	N/A							
Operating Environment	-20° ~ 40°C							
Dimensions	Ø461 x 418mm				Ø468 x 483mm			
Photometry								
Illuminance at a Distance								
	Centre Beam Avg (lx)		Centre Beam Avg (lx)		Centre Beam Avg (lx)		Centre Beam Avg (lx)	
	Beam Diameter (m)		Beam Diameter (m)		Beam Diameter (m)		Beam Diameter (m)	
	1m		1m		1m		1m	
	2m		2m		2m		2m	
	3m		3m		3m		3m	
Luminous Light Distribution								
	0 ~ 180°		0 ~ 180°		0 ~ 180°		0 ~ 180°	
	90 ~ 270°		90 ~ 270°		90 ~ 270°		90 ~ 270°	
	Units: cd		Units: cd		Units: cd		Units: cd	
	90°		90°		90°		90°	
	30°		30°		30°		30°	



Professional LED High Bay Lighting


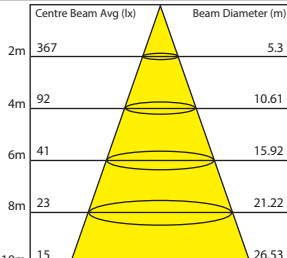
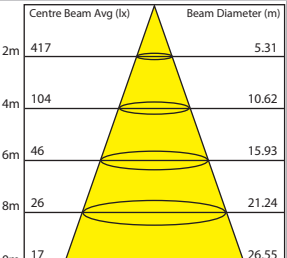
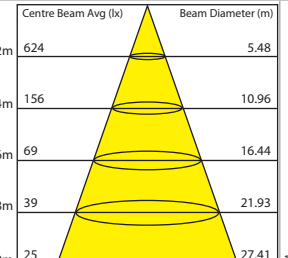
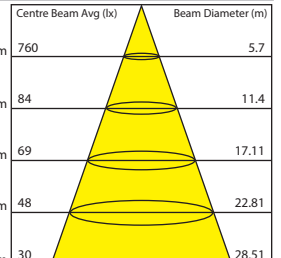
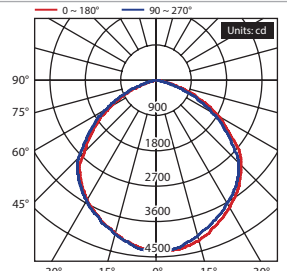
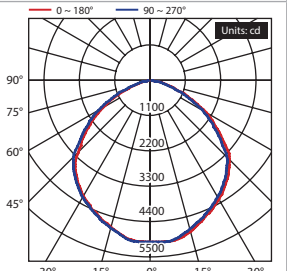
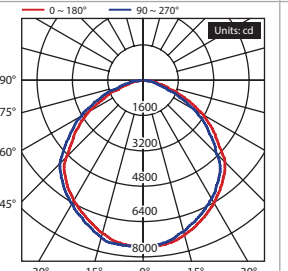
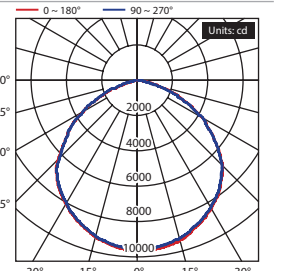
LHB-B Series: Compact high bay lighting in 80W, 100W, 150W and 200W models

The LHB-B series of high bay lights delivers unique, energy efficient alternatives to HPS and metal-halide high bay lighting in a compact, robust housing. With an internal 120° LED reflector, the LHB-B series delivers wide light distribution without the need for a separate reflector. The wide beam angle of LHB-B Series high bays offers high lumen output and floor lux levels when mounted for ceilings up to 10m.

The LHB-B series is also compatible with the ENSA-MS5, the microwave motion sensor switch designed for high bay use.

- 80W, 100W, 150W and 200W industry-ready LED high bay
- Compact and robust: no additional reflector required
- Efficient heatsink cooling technology
- Standard in 6000K cool white with 120° beam angle
- Durable IP65 weather resistant rating
- Includes steel fail-safe cable & tough eyelet mount

Series Specifications

Model	LHB-B80	LHB-B100	LHB-B150	LHB-B200
Product Image				
Series Name	LHB-B Series: Professional LED High Bay Series			
Optical				
Light Output	8000lm	10000lm	15000lm	20000lm
Luminous Efficacy	100lm/W			
Colour Temperature	6000K			
Colour Rendering Index	>80			
Beam Angle	120°			
Light Decay	< 15% at 25,000 hours			
Rated Lifespan	50,000 hours			
Electrical				
Power Consumption	80W	100W	150W	200W
Input Voltage	100 ~ 277VAC			
Power Factor	> 0.9			
Dimmable	N/A			
General				
Ingress Protection	IP65			
Plug / Socket / Base	3-pin AC plug			
Reflector / Diffuser	Aluminium / Polycarbonate			
Housing Adjustments	N/A			
Operating Environment	-10 ~ 50°C			
Dimensions	Ø300 x 190mm	Ø300 x 190mm	Ø346 x 203mm	Ø400 x 225mm
Photometry				
Illuminance at a Distance				
Luminous Light Distribution				


Ordering Information

Type	Series	Wattage	Colour Temperature
LHB	-	80 (80W) 100 (100W) 150 (150W) 200 (200W)	- C (Cool white)
LHB-B150-C: 150W LED High Bay in Cool White			

Additional Accessories

The ENSA-MS5 high bay microwave motion sensor is purpose built for use with high ceilings.

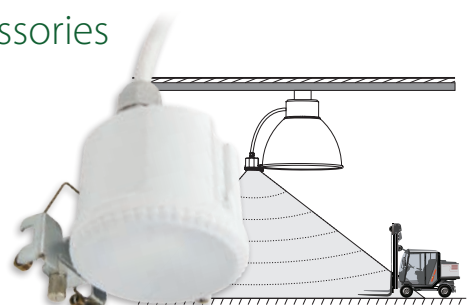It mounts directly to the high bay reflector, up to 15m in height to achieve a ground detection area of Ø8m.





Professional LED High Bay Lighting


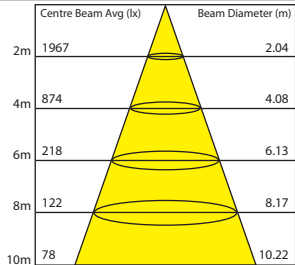
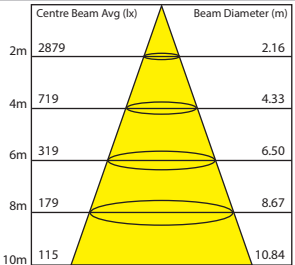
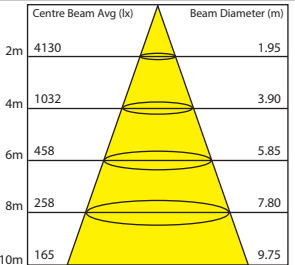
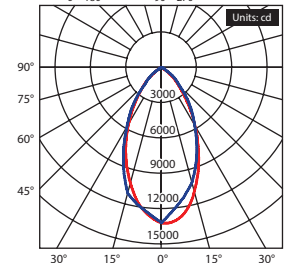
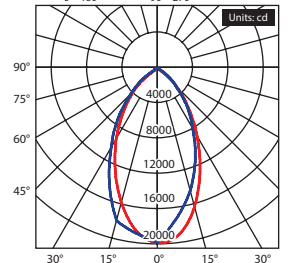
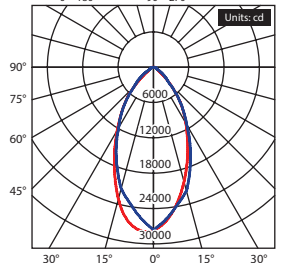
LHB-C Series: Professional high bay lighting in 100W, 150W and 200W models

The ENSA™ LHB-C series of professional high bay lights are built to deliver energy efficient lighting to industrial and commercial environments. They are also weather-resistant, making them ideal for outdoors installations and events.

The LHB-C series delivers ideal lighting conditions in areas with high ceilings up to 12m, such as warehouses, manufacturing facilities and exhibition halls, with a high luminous efficacy for optimal power consumption. Each light has a compact, robust aluminium body and comes in 6500K cool white colour temperature.

- 100W, 150W and 200W industry-ready LED high bay
- Compact and robust: no additional reflector required
- Efficient heatsink cooling technology
- Standard in 6500K cool white with 60° beam angle
- Durable IP65 weather resistant rating
- High 130lm/W luminous efficacy for energy efficiency

Series Specifications

Model	LHB-C100-C	LHB-C150-C	LHB-C200-C
Product Image			
Series Name	LHB-C Series: Professional LED High Bay Series		
Optical			
Light Output	13000lm	19500lm	26000lm
Luminous Efficacy	130lm/W		
Colour Temperature	6500K		
Colour Rendering Index	>80		
Beam Angle	60°		
Light Decay	<3% at 6,000 hours		
Rated Lifespan	50,000 hours		
Electrical			
Power Consumption	100W	150W	200W
Input Voltage	180 ~ 305VAC		
Power Factor	> 0.9		
Dimmable	N/A		
General			
Ingress Protection	IP65		
Plug / Socket / Base	3-pin AC plug		
Reflector / Diffuser	Aluminium / Polycarbonate		
Housing Adjustments	N/A		
Operating Environment	-20 ~ 40°C		
Dimensions	Ø290 x 170mm	Ø340 x 180mm	Ø400 x 194mm
Photometry			
Illuminance at a Distance			
Luminous Light Distribution			

Ordering Information

Type	Series	Wattage	Colour Temperature
LHB	-	C	100 (100W) 150 (150W) 200 (200W)
			- C (Cool white)

LHB-C150-C: 150W LED High Bay in Cool White



High Power LED Flood Lighting

LFL-D Series: Large format flood lighting in 240W, 360W, 480W, 720W, 960W models

The ENSA™ LFL-D series of high-power LED flood lights delivers exceptional lighting performance in a robust, weather resistant package. Available in 240W, 360W, 480W, 720W, 960W models with a wide 100° beam angle.

The LFL-D series flood lights are ideal for high power lighting in commercial and industrial environments including stadiums, car parks, building sites, security lighting, signage illumination and more. Each light has a robust powder coated, IP65 rated, aluminium body and tempered glass front for superior light transmittance.

- High luminous efficacy LED flood lighting (130lm/W)
- Available in 3000K warm white and 5000K cool white
- IP65 weather resistant, suitable for outdoor applications
- Wide 100° beam angle, ideal for general purpose lighting
- Efficient replacement for halogen and metal-halide floods
- 360° adjustable two-point fastened mounting bracket

Series Specifications

Special
Order

Special
Order

Special
Order

Model	LFL-D240	LFL-D360	LFL-D480	LFL-D720	LFL-D960																																		
Product Image																																							
Series Name	LFL-D Series Commercial High Power LED Flood Lights																																						
Optical																																							
Luminous Flux	31200lm	46800lm	62400lm	93600lm	124800lm																																		
Luminous Efficacy	130lm/W																																						
Colour Temperature	3000K / 5000K																																						
Colour Rendering Index	> 80																																						
Beam Angle	60 x 100°																																						
Light Decay	<15% at 20,000 hours																																						
Rated Lifespan	50,000 hours																																						
Electrical																																							
Power Consumption	240W	360W	480W	720W	960W																																		
Input Voltage	100 ~ 240VAC																																						
Dimmable	N/A																																						
General																																							
Ingress Protection	IP65																																						
Plug / Socket / Base	3-pin AC plug																																						
Reflector / Diffuser	Aluminium reflector / Glass LED lens front																																						
Housing Adjustments	360° adjustable housing																																						
Operating Environment	-20° ~ 50°C																																						
Dimensions	485 x 410 x 275mm	670 x 410 x 275mm	630 x 500 x 285mm	885 x 500 x 285mm	1145 x 500 x 285mm																																		
Weight	11.3kg	15.0kg	19.2kg	30.0kg	36.0kg																																		
Photometry																																							
Illuminance at a Distance	<table><thead><tr><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>4350</td><td>1.16</td></tr><tr><td>1087</td><td>2.33</td></tr><tr><td>483</td><td>3.49</td></tr><tr><td>271</td><td>4.66</td></tr><tr><td>174</td><td>5.83</td></tr></tbody></table> <p>LFL-D240-C (240W, cool white)</p>	Centre Beam Avg (lx)	Beam Diameter (m)	4350	1.16	1087	2.33	483	3.49	271	4.66	174	5.83	<table><thead><tr><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>8149</td><td>1.5</td></tr><tr><td>2037</td><td>3.01</td></tr><tr><td>905</td><td>4.53</td></tr><tr><td>509</td><td>6.09</td></tr><tr><td>326</td><td>7.54</td></tr></tbody></table> <p>LFL-D480-C (480W, cool white)</p>	Centre Beam Avg (lx)	Beam Diameter (m)	8149	1.5	2037	3.01	905	4.53	509	6.09	326	7.54	<table><thead><tr><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>16465</td><td>1.64</td></tr><tr><td>4116</td><td>3.28</td></tr><tr><td>1829</td><td>4.92</td></tr><tr><td>1029</td><td>6.56</td></tr><tr><td>658</td><td>8.21</td></tr></tbody></table> <p>LFL-D960-C (960W, cool white)</p>	Centre Beam Avg (lx)	Beam Diameter (m)	16465	1.64	4116	3.28	1829	4.92	1029	6.56	658	8.21
	Centre Beam Avg (lx)	Beam Diameter (m)																																					
	4350	1.16																																					
	1087	2.33																																					
483	3.49																																						
271	4.66																																						
174	5.83																																						
Centre Beam Avg (lx)	Beam Diameter (m)																																						
8149	1.5																																						
2037	3.01																																						
905	4.53																																						
509	6.09																																						
326	7.54																																						
Centre Beam Avg (lx)	Beam Diameter (m)																																						
16465	1.64																																						
4116	3.28																																						
1829	4.92																																						
1029	6.56																																						
658	8.21																																						
Luminous Light Distribution	<p>LFL-D240-C (240W, cool white)</p>	<p>LFL-D480-C (480W, cool white)</p>	<p>LFL-D960-C (960W, cool white)</p>																																				

Ordering Information

Type	Series	Wattage	Colour Temperature
LFL	-	D	240 ~ 960 (240W ~ 960W)
			C (Cool white) W (Warm white)
LFL-D240-C: 240W LED High Power Flood Light in Cool White			



Professional LED Flood Lighting

LFL-B Series: High performance floods in 20W, 30W, 50W, 70W, 100W, 150W and 200W models

The ENSA™ LFL-B series of high-power LED flood lights delivers exceptional lighting performance in a robust, weather resistant package. Available in 20W, 30W, 50W, 70W, 100W, 150W and 200W models with a wide 100° beam angle.

Ideal for general purpose lighting in commercial and industrial environments including parking lots, building sites, security lighting, sporting fields, signage and more. LFL-B series floods feature a slim, lightweight design with a U-shape adjustable bracket, making them easy to mount. Each light sports a powder coated, IP65 rated, aluminium body and heatsink for excellent thermal conductivity; a tempered glass front for superior light transmittance; and UV resistant ASA plastic bolt caps.

- High luminous efficacy LED flood lighting (110lm/W)
- Available in 3000K warm white and 5000K cool white
- IP65 weather resistant, suitable for outdoor applications
- Wide 100° beam angle, ideal for general purpose lighting
- Efficient replacement for halogen and metal-halide floods
- 180° adjustable two-point fastened mounting bracket

Series Specifications

Model	LFL-B20	LFL-B30	LFL-B50	LFL-B70	LFL-B100	LFL-B150	LFL-B200												
Product Image																			
Series Name	LFL-B Series Commercial LED Flood Lights																		
Optical																			
Luminous Flux	2200 lm	3300 lm	5500 lm	7700 lm	11000 lm	16500 lm	22000 lm												
Luminous Efficacy	110lm/W	110lm/W	110lm/W	110lm/W	110lm/W	110lm/W	110lm/W												
Colour Temperature	3000K / 5000K																		
Colour Rendering Index	> 80																		
Beam Angle	100°																		
Light Decay	<15% at 20,000 hours																		
Rated Lifespan	50,000 hours																		
Electrical																			
Power Consumption	20W	30W	50W	70W	100W	150W	200W												
Input Voltage	100 ~ 240VAC																		
Dimmable	N/A																		
General																			
Ingress Protection	IP65																		
Plug / Socket / Base	3-pin AC plug																		
Reflector / Diffuser	Aluminium reflector / glass front																		
Housing Adjustments	180° adjustable housing																		
Operating Environment	-20° ~ 50°C																		
Dimensions	216 x 152 x 40mm	226 x 167 x 40mm	310 x 220 x 50mm	355 x 245 x 55mm	402 x 295 x 60mm	430 x 330 x 60mm	470 x 360 x 60mm												
Weight	0.78kg	1.10kg	1.70kg	2.75kg	3.90kg	5.10kg	6.30kg												
Photometry																			
Illuminance at a Distance	<table><thead><tr><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>671</td><td>2.79</td></tr><tr><td>168</td><td>5.58</td></tr><tr><td>75</td><td>8.37</td></tr><tr><td>42</td><td>11.17</td></tr><tr><td>27</td><td>13.96</td></tr></tbody></table>							Centre Beam Avg (lx)	Beam Diameter (m)	671	2.79	168	5.58	75	8.37	42	11.17	27	13.96
	Centre Beam Avg (lx)	Beam Diameter (m)																	
671	2.79																		
168	5.58																		
75	8.37																		
42	11.17																		
27	13.96																		
	<table><thead><tr><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>1345</td><td>2.75</td></tr><tr><td>336</td><td>5.49</td></tr><tr><td>150</td><td>8.24</td></tr><tr><td>84</td><td>10.99</td></tr><tr><td>54</td><td>13.73</td></tr></tbody></table>							Centre Beam Avg (lx)	Beam Diameter (m)	1345	2.75	336	5.49	150	8.24	84	10.99	54	13.73
Centre Beam Avg (lx)	Beam Diameter (m)																		
1345	2.75																		
336	5.49																		
150	8.24																		
84	10.99																		
54	13.73																		
	<table><thead><tr><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>2469</td><td>2.87</td></tr><tr><td>617</td><td>5.73</td></tr><tr><td>274</td><td>8.60</td></tr><tr><td>154</td><td>11.47</td></tr><tr><td>99</td><td>14.33</td></tr></tbody></table>							Centre Beam Avg (lx)	Beam Diameter (m)	2469	2.87	617	5.73	274	8.60	154	11.47	99	14.33
Centre Beam Avg (lx)	Beam Diameter (m)																		
2469	2.87																		
617	5.73																		
274	8.60																		
154	11.47																		
99	14.33																		
Luminous Light Distribution	<p>LFL-B50-C (50W, cool white)</p>																		
	<p>LFL-B100-C (100W, cool white)</p>																		
	<p>LFL-B200-C (200W, cool white)</p>																		

Ordering Information

Type	Series		Wattage	Colour Temperature	
LFL	-	B	20 ~ 200 (20W ~ 200W)	-	C (Cool white) W (Warm white)
LFL-B150-C: 150W LED Flood Light in Cool White					



Commercial LED Sensor Flood Lighting




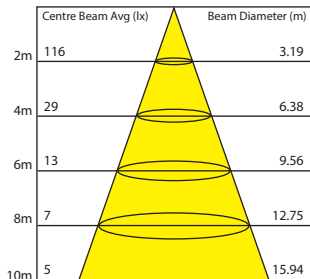
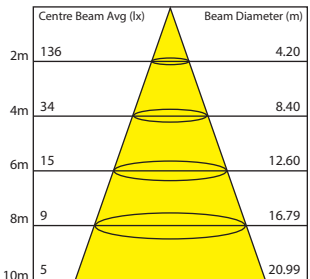
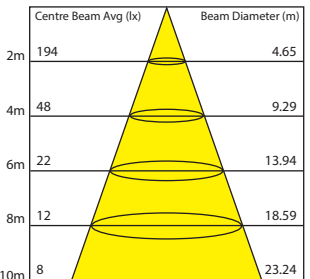
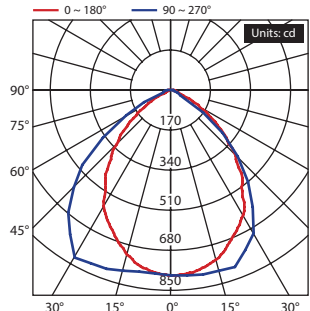
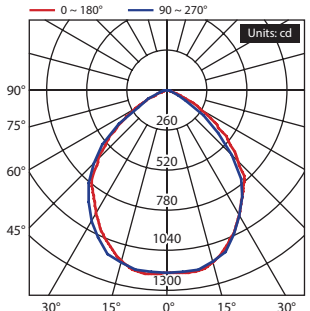
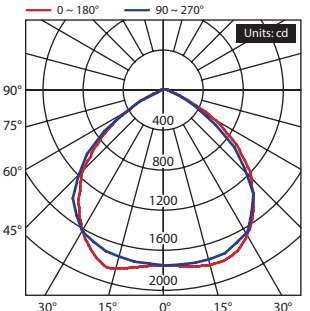
LFL-C Series: Passive infrared motion sensor floods in 20W, 30W and 50W models

The LFL-C Series combines efficient LED flood lighting with customisable motion-sensing technology to compound your energy savings. Available in three wattages, each model this series is equipped with an adjustable 12m passive infrared (PIR) motion sensor, an ambient light detection for dusk/dawn switching, and an adjustable on/off delay timer. Each of these can be configured so the sensor light delivers maximum energy efficiency, safety and performance.

Models also feature a metal-body, IP65 rated weather resistant chassis, making them well suited for general purpose and security lighting in both commercial and domestic applications.


- Sensor flood light models detect up to 12m in a 140° arc
- Adjust detection sensitivity & on-time delay (5s ~ 5min)
- Durable metal IP65 rated weather resistant chassis
- Wide 120° beam angle; diffuser minimises LED glare
- Adjustable U-shape mount with over 180° of motion
- Available in 5000K cool white with 85lm/W light output

Series Specifications

Model	LFL-C20-CS		LFL-C30-CS		LFL-C50-CS																																																						
Product Image																																																											
Series Name	LFL-C Series Commercial LED Sensor Flood Lights																																																										
Optical																																																											
Light Output	1700lm		2550lm		4250lm																																																						
Luminous Efficacy			85lm/W																																																								
Colour Temperature			5000K																																																								
Colour Rendering Index			>70																																																								
Beam Angle			120°																																																								
Light Decay			< 4% at 6,000 hours																																																								
Rated Lifespan			50,000 hours																																																								
Electrical																																																											
Power Consumption	20W		30W		50W																																																						
Input Voltage			100 ~ 240VAC																																																								
Power Factor			> 0.9																																																								
Dimmable			N/A																																																								
General																																																											
Motion Sensor	PIR: 140° arc up to 12m range																																																										
Sensor Calibration	Ambient light detection, motion sensitivity and on-time delay (5s ~ 5min)																																																										
Ingress Protection	IP65																																																										
Plug / Socket / Base	3-pin AC plug																																																										
Reflector / Diffuser	Aluminium reflector / Tempered glass front																																																										
Housing Adjustments	+180° angle adjustable U-shape bracket / Fully adjustable PIR sensor stalk																																																										
Operating Environment	-20° ~ 50°C																																																										
Dimensions	182 x 150 x 52mm		230 x 195 x 65mm		230 x 195 x 65mm																																																						
Photometry																																																											
Illuminance at a Distance																																																											
	<table><thead><tr><th></th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>2m</td><td>116</td><td>3.19</td></tr><tr><td>4m</td><td>29</td><td>6.38</td></tr><tr><td>6m</td><td>13</td><td>9.56</td></tr><tr><td>8m</td><td>7</td><td>12.75</td></tr><tr><td>10m</td><td>5</td><td>15.94</td></tr></tbody></table>			Centre Beam Avg (lx)	Beam Diameter (m)	2m	116	3.19	4m	29	6.38	6m	13	9.56	8m	7	12.75	10m	5	15.94	<table><thead><tr><th></th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>2m</td><td>136</td><td>4.20</td></tr><tr><td>4m</td><td>34</td><td>8.40</td></tr><tr><td>6m</td><td>15</td><td>12.60</td></tr><tr><td>8m</td><td>9</td><td>16.79</td></tr><tr><td>10m</td><td>5</td><td>20.99</td></tr></tbody></table>			Centre Beam Avg (lx)	Beam Diameter (m)	2m	136	4.20	4m	34	8.40	6m	15	12.60	8m	9	16.79	10m	5	20.99	<table><thead><tr><th></th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>2m</td><td>194</td><td>4.65</td></tr><tr><td>4m</td><td>48</td><td>9.29</td></tr><tr><td>6m</td><td>22</td><td>13.94</td></tr><tr><td>8m</td><td>12</td><td>18.59</td></tr><tr><td>10m</td><td>8</td><td>23.24</td></tr></tbody></table>			Centre Beam Avg (lx)	Beam Diameter (m)	2m	194	4.65	4m	48	9.29	6m	22	13.94	8m	12	18.59	10m	8
	Centre Beam Avg (lx)	Beam Diameter (m)																																																									
2m	116	3.19																																																									
4m	29	6.38																																																									
6m	13	9.56																																																									
8m	7	12.75																																																									
10m	5	15.94																																																									
	Centre Beam Avg (lx)	Beam Diameter (m)																																																									
2m	136	4.20																																																									
4m	34	8.40																																																									
6m	15	12.60																																																									
8m	9	16.79																																																									
10m	5	20.99																																																									
	Centre Beam Avg (lx)	Beam Diameter (m)																																																									
2m	194	4.65																																																									
4m	48	9.29																																																									
6m	22	13.94																																																									
8m	12	18.59																																																									
10m	8	23.24																																																									
Luminous Light Distribution																																																											
	<table><thead><tr><th></th><th>0 ~ 180°</th><th>90 ~ 270°</th></tr></thead><tbody><tr><td>90°</td><td>170</td><td>170</td></tr><tr><td>75°</td><td>340</td><td>340</td></tr><tr><td>60°</td><td>510</td><td>510</td></tr><tr><td>45°</td><td>680</td><td>680</td></tr><tr><td>30°</td><td>850</td><td>850</td></tr></tbody></table>			0 ~ 180°	90 ~ 270°	90°	170	170	75°	340	340	60°	510	510	45°	680	680	30°	850	850	<table><thead><tr><th></th><th>0 ~ 180°</th><th>90 ~ 270°</th></tr></thead><tbody><tr><td>90°</td><td>260</td><td>260</td></tr><tr><td>75°</td><td>520</td><td>520</td></tr><tr><td>60°</td><td>780</td><td>780</td></tr><tr><td>45°</td><td>1040</td><td>1040</td></tr><tr><td>30°</td><td>1300</td><td>1300</td></tr></tbody></table>			0 ~ 180°	90 ~ 270°	90°	260	260	75°	520	520	60°	780	780	45°	1040	1040	30°	1300	1300	<table><thead><tr><th></th><th>0 ~ 180°</th><th>90 ~ 270°</th></tr></thead><tbody><tr><td>90°</td><td>400</td><td>400</td></tr><tr><td>75°</td><td>800</td><td>800</td></tr><tr><td>60°</td><td>1200</td><td>1200</td></tr><tr><td>45°</td><td>1600</td><td>1600</td></tr><tr><td>30°</td><td>2000</td><td>2000</td></tr></tbody></table>			0 ~ 180°	90 ~ 270°	90°	400	400	75°	800	800	60°	1200	1200	45°	1600	1600	30°	2000
	0 ~ 180°	90 ~ 270°																																																									
90°	170	170																																																									
75°	340	340																																																									
60°	510	510																																																									
45°	680	680																																																									
30°	850	850																																																									
	0 ~ 180°	90 ~ 270°																																																									
90°	260	260																																																									
75°	520	520																																																									
60°	780	780																																																									
45°	1040	1040																																																									
30°	1300	1300																																																									
	0 ~ 180°	90 ~ 270°																																																									
90°	400	400																																																									
75°	800	800																																																									
60°	1200	1200																																																									
45°	1600	1600																																																									
30°	2000	2000																																																									

Ordering Information

Type	Series		Wattage		Colour Temperature		Sensor
LFL	-	C	20 (20W) 30 (30W) 50 (50W)	-	C	(Cool white)	S
LFL-C30-CS: 30W LED Sensor Flood Light in Cool White							

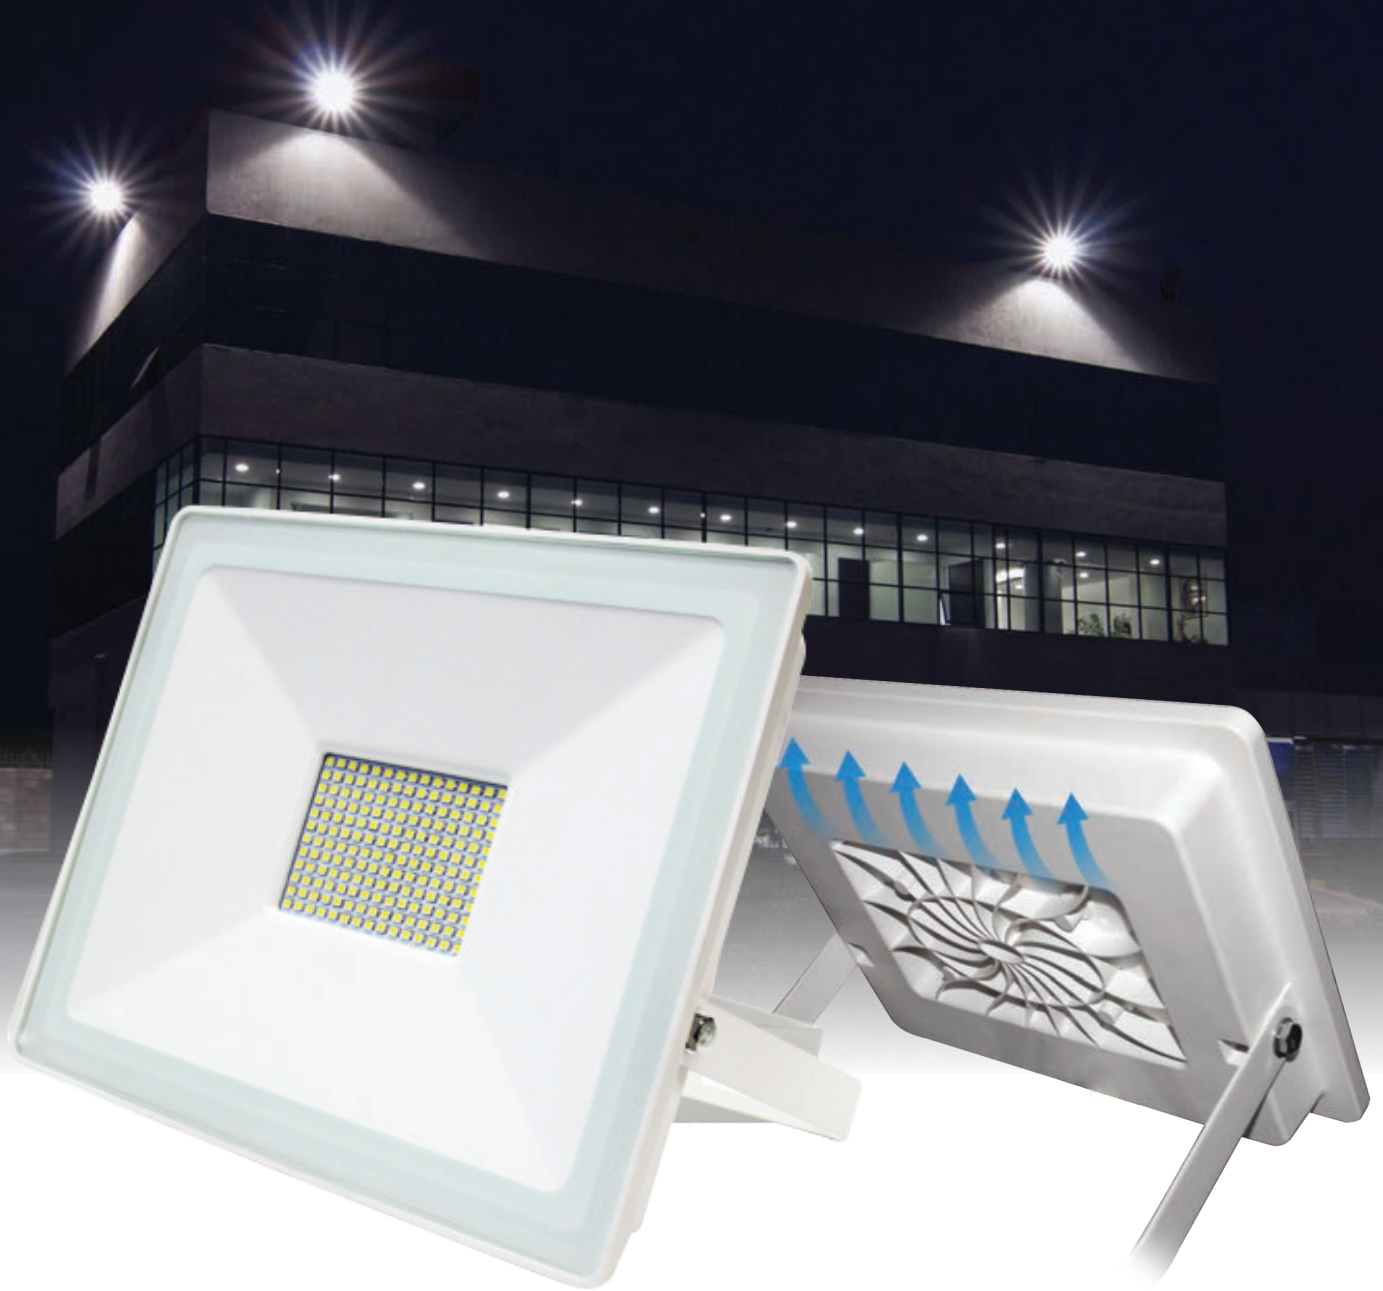

Residential LED Flood Lighting


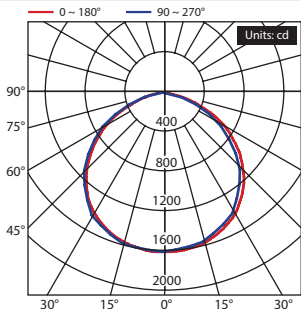
LFL-E Series: Affordable flood lighting available in 50W, in cool white colour temperature

The ENSA™ LFL-E Series LED flood lighting delivers reliable, energy efficient and cost effective flood lighting, ideal for use in residential and light commercial environments.

Available in 50W in cool white colour temperature, LFL-E Series models are best suited for general purpose lighting, in security lighting applications, for signage illumination and more. Lights feature a white plastic-coated aluminium IP65 weather rated housing, with tempered glass front and simple 180° U-bracket for easy mounting.

- High luminous efficacy LED flood lighting (90lm/W)
- Available in 5000K cool white colour temperature
- IP65 weather resistant, suitable for outdoor applications
- Wide 100° beam angle, ideal for general purpose lighting
- Efficient replacement for halogen and metal-halide floods
- 180° adjustable mounting bracket for easy installation

Series Specifications

Model	LFL-E50-C																			
Product Image																				
Series Name	LFL-E Series LED Flood Light																			
Optical																				
Luminous Flux	4500lm																			
Luminous Efficacy	90lm/W																			
Colour Temperature	5000K																			
Colour Rendering Index	> 80																			
Beam Angle	100°																			
Light Decay	< 15% at 15,000 hours																			
Rated Lifespan	30,000 hours																			
Electrical																				
Power Consumption	50W																			
Input Voltage	200 ~ 240VAC																			
Power Factor	> 0.9																			
Dimmable	N/A																			
General																				
Ingress Protection	IP65																			
Plug / Socket / Base	3-pin AC plug																			
Reflector / Diffuser	Aluminium reflector / tempered glass front																			
Housing Adjustments	180° adjustable housing																			
Operating Environment	-20° ~ 50°C																			
Dimensions	270 x 256 x 34mm																			
Weight	1.38kg																			
Photometry																				
Illuminance at a Distance	<table><thead><tr><th></th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>1m</td><td>493</td><td>2.96</td></tr><tr><td>2m</td><td>123</td><td>5.93</td></tr><tr><td>3m</td><td>55</td><td>8.89</td></tr><tr><td>4m</td><td>31</td><td>11.85</td></tr><tr><td>5m</td><td>20</td><td>14.82</td></tr></tbody></table>			Centre Beam Avg (lx)	Beam Diameter (m)	1m	493	2.96	2m	123	5.93	3m	55	8.89	4m	31	11.85	5m	20	14.82
	Centre Beam Avg (lx)	Beam Diameter (m)																		
1m	493	2.96																		
2m	123	5.93																		
3m	55	8.89																		
4m	31	11.85																		
5m	20	14.82																		
Luminous Light Distribution																				

Ordering Information

Type	Series		Wattage	Colour Temperature	
LFL	-	E	50 (50W)	-	C (Cool white)
LFL-E50-C: 50W LED Flood Light in Cool White					



Professional LED Street Lighting

LSL-A Series: Modular LED street light design in 50W, 100W, 150W and 200W models

The ENSA™ LSL-A series features all-weather, high efficiency LED street lights, with superior light distribution, colour rendering and vertical illumination when compared to traditional HPS lamps. With an innovative, modular design, the LSL-A series offers a variety of models suitable for all road types, parks, squares and more.





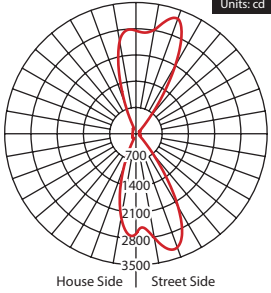
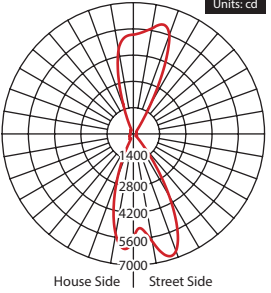
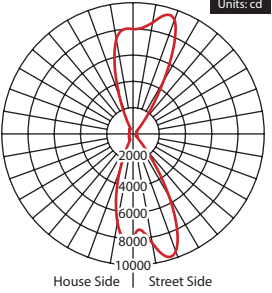
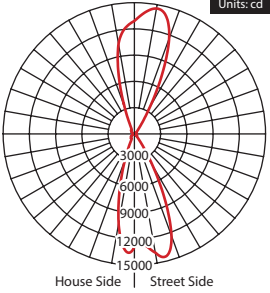
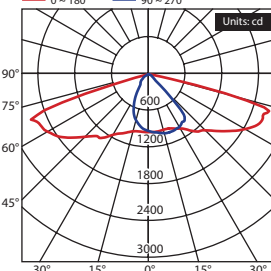
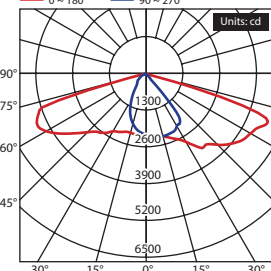
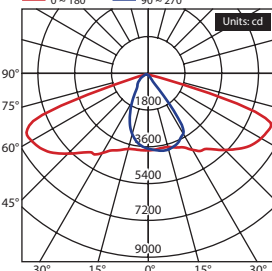
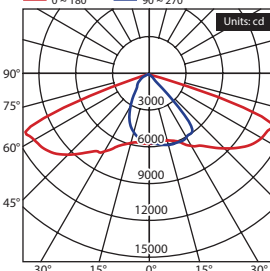
Each street light utilises Philips Lumileds to deliver long lasting, high efficiency lighting. Each light has a batwing light distribution that concentrates light upon roads and walkways, reducing street light glare and light spill into homes/private property.

- High efficiency, all-weather, low energy use street light.
- Effective light distribution with 140° x 60° beam angle.
- Up to 100lm/W performance with Philips Lumileds LEDs.
- Each street light model includes in-line surge protection.
- Available in 4500K natural white colour temperature.
- IP65 dust and weather resistant for external use.

Series Specifications

Special
Order

Special
Order

Model	LSL-A50	LSL-A100	LSL-A150	LSL-A200
Product Image				
Series Name	LSL-A Series Professional LED Street Lights			
Optical				
Light Output	5000lm	10000lm	15000lm	20000lm
Luminous Efficacy	100lm/W			
Colour Temperature	3000K / 4500K / 6000K			
Colour Rendering Index	> 80			
Beam Angle	140° x 60°			
Light Decay	<3% at 6,000 hours			
Rated Lifespan	50,000 hours			
Electrical				
Power Consumption	50W	100W	150W	200W
Input Voltage	100 ~ 277VAC			
Power Factor	> 0.95			
Dimmable	N/A			
General				
Ingress Protection	IP65			
Plug / Socket / Base	No plug			
Reflector / Diffuser	N/A			
Housing Adjustments	Adjustable pole fitting: Ø57 ~ 63mm			
Operating Environment	-45° ~ 50°C / 10~90%RH			
Dimensions	485 x 330 x 90mm	590 x 330 x 90mm	690 x 330 x 90mm	770 x 330 x 90mm
Photometry				
Street Light Distribution				
Luminous Light Distribution				

Ordering Information

Type	Series	Wattage	Colour Temperature
LSL	-	50 (50W) 100 (100W) 150 (150W) 200 (200W)	- CW (Cool white) NW (Natural white) WW (Warm white)
LSL-A150-NW: 150W LED Street Light in Natural White			



Professional LED Canopy Lighting

LCL-B Series: Surface or recessed mount canopy lights in 50W, 100W and 150W models


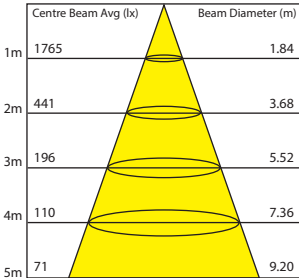
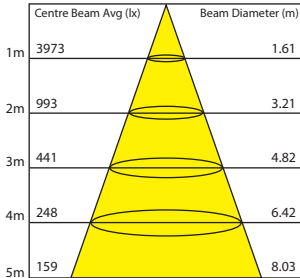
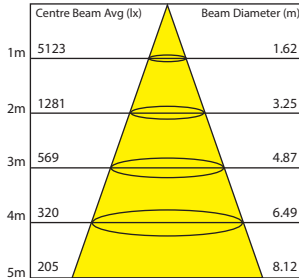
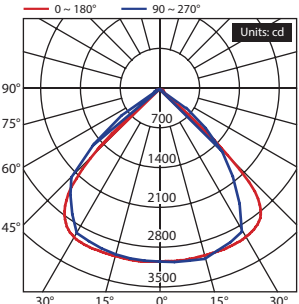
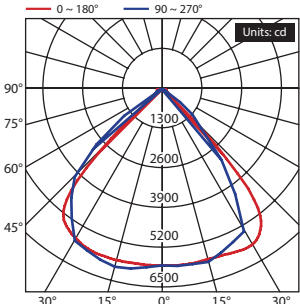
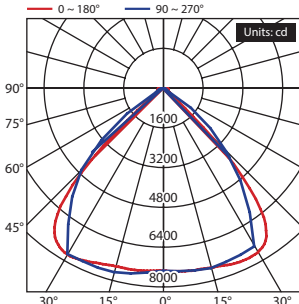
ENSA™ professional LED canopy light series is comprised of energy efficient fixtures purpose built for low-bay or canopy lighting applications. Lights include mounting components for both surface mount or recessed mount applications.

Each light in the series features an IP65 dust/water ingress protection rating making them perfect for demanding lighting applications such as in petroleum stations, car parks & car washes, industrial lighting and more. This series utilises high quality Samsung and Epistar LEDs for high-intensity light output and long LED lifespan.

- Efficient replacements for high intensity discharge lamps.
- Square light pattern with 90° x 90° beam angle.
- High quality LEDs with up to 30,000 hrs rated lifespan.
- Lights include kits for surface and recessed mounting.
- Available in natural white colour temperature (4500K).
- IP65 dust and weather resistant for external use

Series Specifications



Model	LCL-B50		LCL-B100	LCL-B150																																																							
Product Image																																																											
Series Name	LCL-B Series Professional LED Canopy Lights																																																										
Optical																																																											
Light Output	5500lm		10500lm	15500lm																																																							
Luminous Efficacy	>100lm/W		>100lm/W	>100lm/W																																																							
LED Package	Epistar		Samsung	Samsung																																																							
Colour Temperature			4500K																																																								
Colour Rendering Index			>80																																																								
Beam Angle			90° x 90°																																																								
Light Decay			<3% at 6,000 hours																																																								
Rated Lifespan			30,000 hours																																																								
Electrical																																																											
Power Consumption	50W		100W	150W																																																							
Input Voltage			100 ~ 240VAC																																																								
Power Factor	>0.90		>0.95	>0.95																																																							
Dimmable			N/A																																																								
General																																																											
Ingress Protection			IP65																																																								
Plug / Socket / Base			3-pin AC plug																																																								
Reflector / Diffuser			Individual clear acrylic LED lens (PMMA)																																																								
Housing Adjustments			Surface mount and recessed mount kit included																																																								
Operating Environment			-20° ~ 45°C / 15~90% humidity																																																								
Dimensions			300 x 300 x 89mm (surface) / 400 x 400 x 90mm (recessed, 320 x 320mm cutout size)																																																								
Photometry																																																											
Illuminance at a Distance																																																											
	<table><thead><tr><th></th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>1m</td><td>1765</td><td>1.84</td></tr><tr><td>2m</td><td>441</td><td>3.68</td></tr><tr><td>3m</td><td>196</td><td>5.52</td></tr><tr><td>4m</td><td>110</td><td>7.36</td></tr><tr><td>5m</td><td>71</td><td>9.20</td></tr></tbody></table>			Centre Beam Avg (lx)	Beam Diameter (m)	1m	1765	1.84	2m	441	3.68	3m	196	5.52	4m	110	7.36	5m	71	9.20	<table><thead><tr><th></th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>1m</td><td>3973</td><td>1.61</td></tr><tr><td>2m</td><td>993</td><td>3.21</td></tr><tr><td>3m</td><td>441</td><td>4.82</td></tr><tr><td>4m</td><td>248</td><td>6.42</td></tr><tr><td>5m</td><td>159</td><td>8.03</td></tr></tbody></table>			Centre Beam Avg (lx)	Beam Diameter (m)	1m	3973	1.61	2m	993	3.21	3m	441	4.82	4m	248	6.42	5m	159	8.03	<table><thead><tr><th></th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>1m</td><td>5123</td><td>1.62</td></tr><tr><td>2m</td><td>1281</td><td>3.25</td></tr><tr><td>3m</td><td>569</td><td>4.87</td></tr><tr><td>4m</td><td>320</td><td>6.49</td></tr><tr><td>5m</td><td>205</td><td>8.12</td></tr></tbody></table>			Centre Beam Avg (lx)	Beam Diameter (m)	1m	5123	1.62	2m	1281	3.25	3m	569	4.87	4m	320	6.49	5m	205
	Centre Beam Avg (lx)	Beam Diameter (m)																																																									
1m	1765	1.84																																																									
2m	441	3.68																																																									
3m	196	5.52																																																									
4m	110	7.36																																																									
5m	71	9.20																																																									
	Centre Beam Avg (lx)	Beam Diameter (m)																																																									
1m	3973	1.61																																																									
2m	993	3.21																																																									
3m	441	4.82																																																									
4m	248	6.42																																																									
5m	159	8.03																																																									
	Centre Beam Avg (lx)	Beam Diameter (m)																																																									
1m	5123	1.62																																																									
2m	1281	3.25																																																									
3m	569	4.87																																																									
4m	320	6.49																																																									
5m	205	8.12																																																									
Luminous Light Distribution																																																											
	<p>Units: cd</p>		<p>Units: cd</p>		<p>Units: cd</p>																																																						

Ordering Information

Type	Series	Wattage	Colour Temperature
LCL	-	B	50 (50W) 100 (100W) 150 (150W)
			N (Natural white)

LCL-B150-N: 150W Surface or Recessed Mount LED Canopy Light in Natural White



Professional LED Panel Lighting


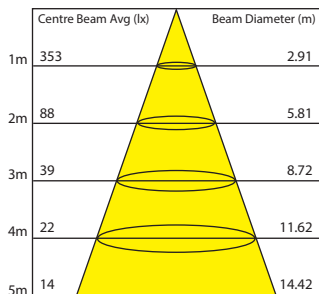
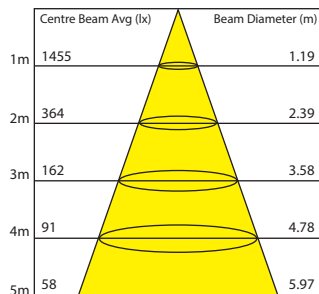
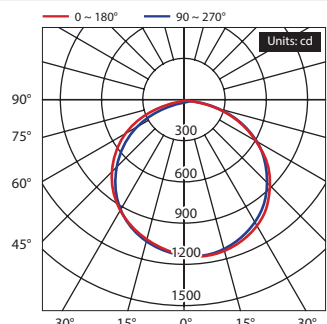
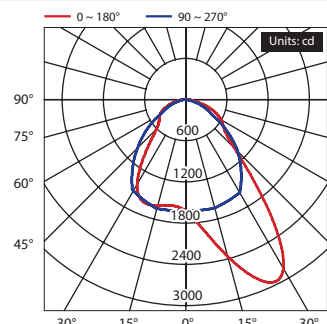
LPL-A series: Low unified glare rating panel lighting in 36W and 48W models

ENSA™ LED panel lights are for replacing traditional tube lighting and are best suited for office and business, in medical and educational environments, in conference rooms, and more. These convenient and efficient lights have a standard rectangular profile (1200 x 300mm) and can be easily recessed in tiled ceilings, surface mounted or suspension mounted.

Each ENSA™ LED panel light features a low Unified Glare Rating, providing a pleasing light that isn't distracting or detrimental to workplace productivity. They are the efficient LED upgrade solution for fluorescent tube troffers.

- Minimalist, stylish & efficient 9mm thick LED panel light.
- Recessed, suspension & surface mounting options.
- Available in cool white and natural white colour temp.
- Low UGR: Create pleasing, low glare, well lit spaces.
- 30,000hrs LED lifespan & <3% light decay over 6,000hrs.
- Designed to easily replace fluorescent troffer fixtures.

Series Specifications

Model	LPL-A36		LPL-A48																								
Product Image																											
Series Name	LPL-A Series Professional LED Panel Lights																										
Optical																											
Light Output	3300lm		4300lm																								
Luminous Efficacy	92lm/W		90lm/W																								
Colour Temperature	4000K / 6000K																										
Colour Rendering Index	>80																										
Beam Angle	110°		90°																								
Light Decay	<3% at 6,000 hours																										
Rated Lifespan	>30,000 hours																										
Electrical																											
Power Consumption	36W		48W																								
Input Voltage	100 ~ 240VAC																										
Power Factor	> 0.95																										
Dimmable	N/A																										
General																											
Ingress Protection	IP20																										
Plug / Socket / Base	3-pin AC plug with external driver																										
Reflector / Diffuser	Frosted diffuser with UGR <22		Frosted diffuser with UGR <19																								
Housing Adjustments	Recessed (standard) / Hanging (optional) / Surface (optional)																										
Operating Environment	-20°C ~ 40°C																										
Dimensions	295 x 1195 x 9mm																										
Photometry																											
Illuminance at a Distance																											
	<table><thead><tr><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>353</td><td>2.91</td></tr><tr><td>88</td><td>5.81</td></tr><tr><td>39</td><td>8.72</td></tr><tr><td>22</td><td>11.62</td></tr><tr><td>14</td><td>14.42</td></tr></tbody></table>		Centre Beam Avg (lx)	Beam Diameter (m)	353	2.91	88	5.81	39	8.72	22	11.62	14	14.42	<table><thead><tr><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>1455</td><td>1.19</td></tr><tr><td>364</td><td>2.39</td></tr><tr><td>162</td><td>3.58</td></tr><tr><td>91</td><td>4.78</td></tr><tr><td>58</td><td>5.97</td></tr></tbody></table>		Centre Beam Avg (lx)	Beam Diameter (m)	1455	1.19	364	2.39	162	3.58	91	4.78	58
Centre Beam Avg (lx)	Beam Diameter (m)																										
353	2.91																										
88	5.81																										
39	8.72																										
22	11.62																										
14	14.42																										
Centre Beam Avg (lx)	Beam Diameter (m)																										
1455	1.19																										
364	2.39																										
162	3.58																										
91	4.78																										
58	5.97																										
Luminous Light Distribution																											

Accessories

Model	LPL-AS	LPL-AH
Product Image		
Type	Surface mount kit	Hanging mount kit
Components	4 x matte white aluminium panels, includes fasteners	Lockable steel cable tethers, includes clips & fasteners

Ordering Information

Type	Series	Wattage	Colour Temperature
LPL	-	A	36 (36W) 48 (48W)
			- CW (Cool white) NW (Natural white)
LPL-A36-CW: 36W LED Panel Light in Cool White			



Intelligent Sensor LED Batten Lighting



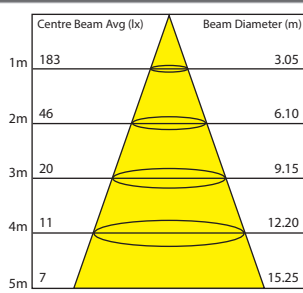
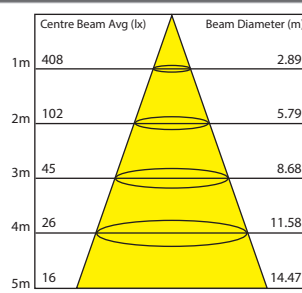
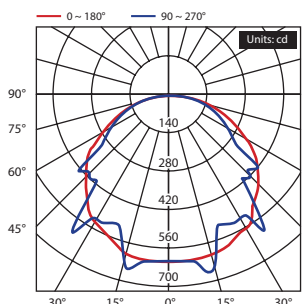
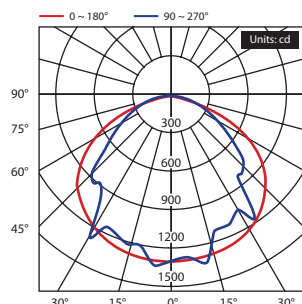
LEDBTS Series: 18W and 36W sensor battens in standard 600mm & 1200mm models

The ENSA™ LED batten light series comprises truly customisable energy efficient lighting solutions that deliver unparalleled control over your lighting, without the need for a complex management system.

Each LED batten uses a fully-configurable ambient light sensor, 5.8GHz microwave motion sensor and light on-timer in tandem, achieving impressively low total energy consumption when compared to traditional twin-batten fluorescent tubes. They are perfect for areas with intermittent people traffic such as in stairwells, corridors, underpasses, multi-storey car parks and more.

- Tailor your light use to further compound energy savings.
- Adjustable light & motion sensing with on-time control.
- Sensor can detect motion through glass and thin walls.
- Built tough housing: IP65 dust and weather resistant.
- Control standby mode: completely off or half brightness.
- Long lifespan LED lighting: rated for up to 50,000 hours.

Series Specifications

Model	LEDBT18WS		LEDBT36WS																								
Product Image																											
Series Name	LEDBTS Series: Standard LED Smart Batten																										
Optical																											
Light Output	1350lm		3240lm																								
Luminous Efficacy	75lm/W		90lm/W																								
Colour Temperature	6000K																										
Colour Rendering Index	> 70																										
Beam Angle	140°																										
Light Decay	< 15% at 20,000 hours																										
Rated Lifespan	> 50,000 hours																										
Electrical																											
Power Consumption	18W		36W																								
Input Voltage	220 ~ 240VAC (50Hz)																										
Power Factor	> 0.9																										
Dimmable	N/A																										
Detection																											
Ambient Light Sensor	3 ~ 2000lx (adjustable)																										
Motion Detection	360° Microwave (5.8GHz) / 8m radius (adjustable)																										
On-Time Delay	10s ~ 12min (adjustable)																										
Standby Light Modes	Off (0% brightness) / Dimmed (50% brightness)																										
General																											
Ingress Protection	IP65																										
Plug / Socket / Base	Internal terminal block																										
Reflector / Diffuser	Clear polycarbonate diffuser / Metal clips																										
Operating Environment	-20° ~ 50°C																										
Dimensions	600 x 86 x 65mm		1200 x 95 x 80mm																								
Photometry																											
Illuminance at a Distance																											
	<table><thead><tr><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>183</td><td>3.05</td></tr><tr><td>46</td><td>6.10</td></tr><tr><td>20</td><td>9.15</td></tr><tr><td>11</td><td>12.20</td></tr><tr><td>7</td><td>15.25</td></tr></tbody></table>		Centre Beam Avg (lx)	Beam Diameter (m)	183	3.05	46	6.10	20	9.15	11	12.20	7	15.25	<table><thead><tr><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>408</td><td>2.89</td></tr><tr><td>102</td><td>5.79</td></tr><tr><td>45</td><td>8.68</td></tr><tr><td>26</td><td>11.58</td></tr><tr><td>16</td><td>14.47</td></tr></tbody></table>		Centre Beam Avg (lx)	Beam Diameter (m)	408	2.89	102	5.79	45	8.68	26	11.58	16
Centre Beam Avg (lx)	Beam Diameter (m)																										
183	3.05																										
46	6.10																										
20	9.15																										
11	12.20																										
7	15.25																										
Centre Beam Avg (lx)	Beam Diameter (m)																										
408	2.89																										
102	5.79																										
45	8.68																										
26	11.58																										
16	14.47																										
Luminous Light Distribution																											
	<p>Units: cd</p>		<p>Units: cd</p>																								

Ordering Information

Type	Wattage	Features
LEDBT	18W (18W) 36W (36W)	S (Sensor batten)
LEDBT36WS: 36W LED Intelligent Batten Light		



Intelligent LED Batten Lighting & Backup




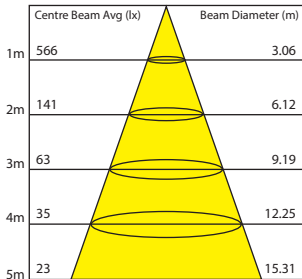
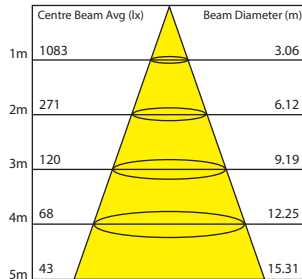
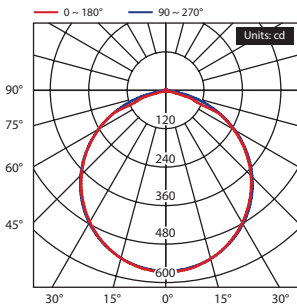
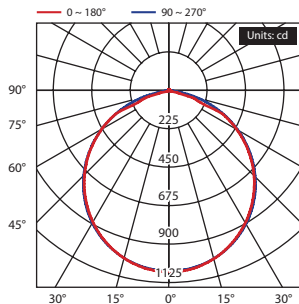
LEDBTWS2 / SE Series: 18W and 36W battens in standard or battery backup models

The ENSA™ LED batten light series comprises customisable energy efficient lighting solutions that deliver control over your lighting, without the need for a complex management system. Models are available as standard sensor batten lights or as an emergency sensor batten light fitted with an emergency backup battery for over 2 hours light uptime.

Similar to the non-emergency range, the intelligent emergency battens feature three smart ways to customise your lighting. Non-emergency models (S2 series) feature an integrated daylight & microwave motion sensor, whereas emergency models (SE series) include a microwave motion sensor with 2-stage dimming.

- Tailor your light use to further compound energy savings.
- Adjustable light-use controls such as on-time delay.
- Sensor can detect motion through glass and thin walls.
- Built tough housing: IP65 dust and weather resistant.
- Emergency lighting models are AS2293.3 approved.
- Easy access TEST button for emergency light testing.

Series Specifications

Model	LEDBT18WS2		LEDBT36WS2		LEDBT18WSE		LEDBT36WSE	
Product Image					 			
Series Name	LEDBTS2 Series: Standard LED Batten				LEDBTSE Series: Battery Backup LED Batten			
Optical								
Light Output	1600lm		3000lm		1600lm		3000lm	
Luminous Efficacy	88lm/W		83lm/W		88lm/W		83lm/W	
Colour Temperature	6000K							
Colour Rendering Index	> 80							
Beam Angle	120°							
Light Decay	< 15% at 10,000 hours							
Rated Lifespan	35,000 hours							
Electrical								
Power Consumption	18W		36W		18W		36W	
Input Voltage	220 ~ 240VAC (50 ~ 60Hz)							
Power Factor	>0.9							
Battery Backup	N/A				12V 1500mAh NiMH >120min use		12V 2500mAh NiCad >120min use	
Emergency Power Output	N/A				6W (default)		10W (default)	
Control								
Ambient Light Threshold	2000lx / 50lx / 15lx / 5lx (adjustable)				N/A			
Motion Detection	360° 5.8GHz Microwave Sensor with 8m max. radius (adjustable)							
On-Time Delay	5s / 30s / 90s / 180s (adjustable)							
Dimmed Brightness	N/A				20% / 40% / 60% / 75% (adjustable)			
Dimming Timeout	N/A				0s / 90s / 180s / ∞s			
Dimming Description	Turn off				Turn off / Time delay / Always on			
General								
Ingress Protection	IP65							
Plug / Socket / Base	Internal terminal block							
Installation Materials	Mounting clips, wall screws & plugs,							
Reflector / Diffuser	Frosted diffuser							
Operating Environment	-25° ~ 40°C							
Dimensions	655 x 108 x 85mm		1260 x 108 x 85mm		655 x 108 x 85mm		1260 x 108 x 85mm	
Photometry								
Illuminance at a Distance	18W models				36W models			
								
Luminous Light Distribution								

Ordering Information

Type	Wattage	Features
LEDBT	18W (18W) 36W (36W)	S2 (Non-emergency sensor batten) SE (Emergency sensor batten)
LEDBT36WSE: 36W LED Sensor Batten with Backup Battery		



Intelligent LED Oyster Lighting with Backup



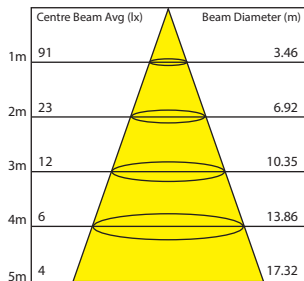
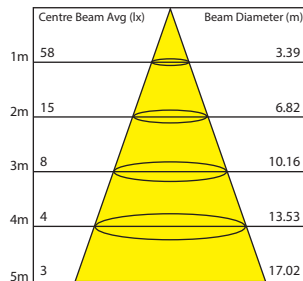
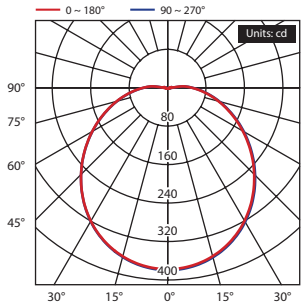
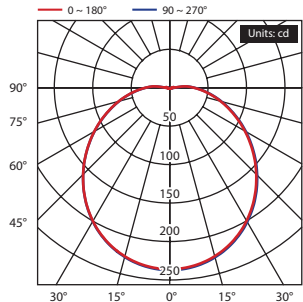
LEDDLs / SE Series: 10W and 16W oyster lights in standard and battery backup models

Make the smarter choice in energy efficient lighting. Compound your LED energy savings by choosing ENSA™ Intelligent LED Oyster Lighting, with three adjustable sensors designed to control light use and boost energy efficiency.

Each LED oyster light uses a fully-configurable ambient light sensor, 5.8GHz microwave motion sensor and light on-timer in tandem, achieving impressively low total energy consumption when compared to traditional fluorescent or incandescent lamps. This makes them the perfect energy efficient light for areas with intermittent people traffic such as in apartment complexes, stairwells, walkways, university campuses and more.

This series is also available in a battery backup model, for use in emergency lighting applications. In the event of AC power loss, the light switches to the backup battery operating at half power (5W), for up to 3 hours of continuous illumination.

Series Specifications

Model	LEDDL16WxKS		LEDDL10WxKSE																																																																
Product Image																																																																			
Series Name	LEDDL5 Series: Smart LED Oyster Lights		LEDDLSE Series: Smart LED Oyster Lights with Backup Battery																																																																
Optical																																																																			
Light Output	1200lm		700lm																																																																
Luminous Efficacy	75lm/W		70lm/W																																																																
Colour Temperature	3000K / 5000K																																																																		
Colour Rendering Index	> 80																																																																		
Beam Angle	120°																																																																		
Light Decay	< 15% at 10,000 hours																																																																		
Rated Lifespan	30,000 hours																																																																		
Electrical																																																																			
Power Consumption	16W		10W																																																																
Input Voltage	220 ~ 240VAC (50Hz)																																																																		
Power Factor	> 0.9																																																																		
Dimmable	N/A																																																																		
Battery Backup	N/A		7.2V 1800mAh NiMH >120min uptime at 5W																																																																
Emergency Brightness	N/A		50% sensing / 100% on detection																																																																
Detection																																																																			
Ambient Light Sensor	< 3 ~ 2000lx (adjustable)																																																																		
Motion Detection	360° Microwave (5.8GHz) / 8m radius (adjustable)																																																																		
On-Time Delay	10s ~ 12min (adjustable)																																																																		
Standby Light Modes	Off (0% brightness)																																																																		
General																																																																			
Ingress Protection	IP44																																																																		
Plug / Socket / Base	Internal terminal block																																																																		
Reflector / Diffuser	Frosted diffuser																																																																		
Operating Environment	-20° ~ 50°C																																																																		
Dimensions	Ø300 x 115mm		Ø280 x 117mm																																																																
Photometry																																																																			
Illuminance at a Distance																																																																			
	<table><thead><tr><th>Distance (m)</th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>1m</td><td>91</td><td>3.46</td></tr><tr><td>2m</td><td>23</td><td>6.92</td></tr><tr><td>3m</td><td>12</td><td>10.35</td></tr><tr><td>4m</td><td>6</td><td>13.86</td></tr><tr><td>5m</td><td>4</td><td>17.32</td></tr></tbody></table>		Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)	1m	91	3.46	2m	23	6.92	3m	12	10.35	4m	6	13.86	5m	4	17.32	<table><thead><tr><th>Distance (m)</th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>1m</td><td>58</td><td>3.39</td></tr><tr><td>2m</td><td>15</td><td>6.82</td></tr><tr><td>3m</td><td>8</td><td>10.16</td></tr><tr><td>4m</td><td>4</td><td>13.53</td></tr><tr><td>5m</td><td>3</td><td>17.02</td></tr></tbody></table>		Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)	1m	58	3.39	2m	15	6.82	3m	8	10.16	4m	4	13.53	5m	3	17.02																											
Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)																																																																	
1m	91	3.46																																																																	
2m	23	6.92																																																																	
3m	12	10.35																																																																	
4m	6	13.86																																																																	
5m	4	17.32																																																																	
Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)																																																																	
1m	58	3.39																																																																	
2m	15	6.82																																																																	
3m	8	10.16																																																																	
4m	4	13.53																																																																	
5m	3	17.02																																																																	
Luminous Light Distribution																																																																			
	<table><thead><tr><th>Beam Angle (°)</th><th>Beam Diameter (m)</th><th>Beam Area (m²)</th><th>Beam Illuminance (lx)</th></tr></thead><tbody><tr><td>0°</td><td>0.00</td><td>0.00</td><td>1200</td></tr><tr><td>15°</td><td>0.26</td><td>0.21</td><td>160</td></tr><tr><td>30°</td><td>0.51</td><td>0.82</td><td>40</td></tr><tr><td>45°</td><td>0.77</td><td>1.88</td><td>16</td></tr><tr><td>60°</td><td>1.04</td><td>3.42</td><td>9</td></tr><tr><td>75°</td><td>1.51</td><td>7.07</td><td>4</td></tr><tr><td>90°</td><td>2.00</td><td>12.57</td><td>2</td></tr></tbody></table>		Beam Angle (°)	Beam Diameter (m)	Beam Area (m²)	Beam Illuminance (lx)	0°	0.00	0.00	1200	15°	0.26	0.21	160	30°	0.51	0.82	40	45°	0.77	1.88	16	60°	1.04	3.42	9	75°	1.51	7.07	4	90°	2.00	12.57	2	<table><thead><tr><th>Beam Angle (°)</th><th>Beam Diameter (m)</th><th>Beam Area (m²)</th><th>Beam Illuminance (lx)</th></tr></thead><tbody><tr><td>0°</td><td>0.00</td><td>0.00</td><td>700</td></tr><tr><td>15°</td><td>0.26</td><td>0.21</td><td>100</td></tr><tr><td>30°</td><td>0.51</td><td>0.82</td><td>25</td></tr><tr><td>45°</td><td>0.77</td><td>1.88</td><td>10</td></tr><tr><td>60°</td><td>1.04</td><td>3.42</td><td>5</td></tr><tr><td>75°</td><td>1.51</td><td>7.07</td><td>2</td></tr><tr><td>90°</td><td>2.00</td><td>12.57</td><td>1</td></tr></tbody></table>		Beam Angle (°)	Beam Diameter (m)	Beam Area (m²)	Beam Illuminance (lx)	0°	0.00	0.00	700	15°	0.26	0.21	100	30°	0.51	0.82	25	45°	0.77	1.88	10	60°	1.04	3.42	5	75°	1.51	7.07	2	90°	2.00	12.57
Beam Angle (°)	Beam Diameter (m)	Beam Area (m²)	Beam Illuminance (lx)																																																																
0°	0.00	0.00	1200																																																																
15°	0.26	0.21	160																																																																
30°	0.51	0.82	40																																																																
45°	0.77	1.88	16																																																																
60°	1.04	3.42	9																																																																
75°	1.51	7.07	4																																																																
90°	2.00	12.57	2																																																																
Beam Angle (°)	Beam Diameter (m)	Beam Area (m²)	Beam Illuminance (lx)																																																																
0°	0.00	0.00	700																																																																
15°	0.26	0.21	100																																																																
30°	0.51	0.82	25																																																																
45°	0.77	1.88	10																																																																
60°	1.04	3.42	5																																																																
75°	1.51	7.07	2																																																																
90°	2.00	12.57	1																																																																

Ordering Information

Type	Wattage	Colour Temperature	Features
LEDDL	10W (10W) 16W (16W)	3K (Warm white) 5K (Cool white)	S (Sensor batten) E (Backup battery)
LEDDL10W5KSE: 10W LED Sensor Oyster Light with Backup Battery			



Professional T8 LED Tube Lighting




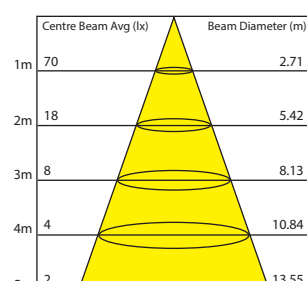
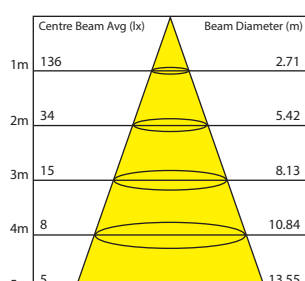
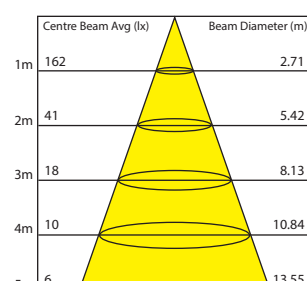
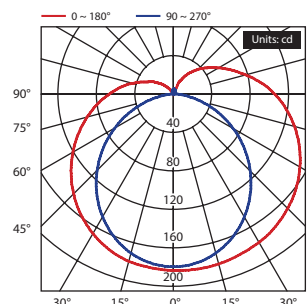
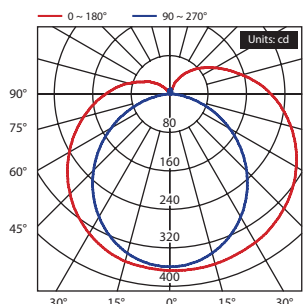
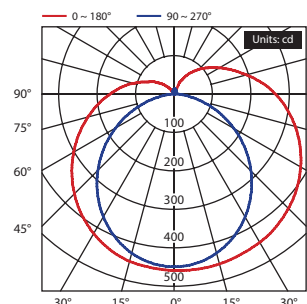
LTU-A Series: High performance LED tubes in 600mm, 1200mm and 1500mm models

The ENSA™ LED tube light series is designed to reduce your fluorescent tube lighting costs by a minimum of 50% and are available in 600mm (2ft), 1200mm (4ft) and 1500mm (5ft) lengths. LTU-A series tubes are more than just energy efficient options to conventional fluorescents. They also deliver better quality & longer lasting light with no UV, they do not require a magnetic or electronic ballast, they turn on/off instantly with no warm up period, they do not fade or flicker, and are 100% recyclable with no mercury or toxic materials.

Each tube features an AC input at one end only and is supplied with an LED starter to replace fluorescent tube fuses.

- Cut your energy use in half by switching to LED tubes.
- High luminous efficacy for optimal return on investment.
- Long lifespan LED lighting: rated for up to 50,000 hours.
- Retrofit or replace: ideal for car parks, offices and more.
- Polycarbonate for low risk of shock (standard model only).
- Supplied with replacement LED starter.

Series Specifications

Model	LTU-A9		LTU-A18		LTU-A22																																																						
Product Image																																																											
Series Name	LTU-A Series T8 LED Tube Lights																																																										
Optical																																																											
Light Output	900lm		1800lm		2200lm																																																						
Luminous Efficacy			100lm/W																																																								
Colour Temperature			6000K																																																								
Colour Rendering Index			> 80																																																								
Beam Angle			140°																																																								
Light Decay			< 3% at 6,000 hours																																																								
Rated Lifespan			> 50,000 hours																																																								
Electrical																																																											
Power Consumption	9W		18W		22W																																																						
Input Voltage			100 ~ 240VAC																																																								
Power Factor			> 0.9																																																								
Dimmable			N/A																																																								
Detection																																																											
Motion Detection			N/A																																																								
On-Time Delay			N/A																																																								
Standby Light Modes			N/A																																																								
General																																																											
Plug / Socket / Base			T8 size / G13 base																																																								
Reflector / Diffuser			Frosted diffuser																																																								
Housing Construction			Polycarbonate																																																								
Operating Environment			-35° ~ 55°C																																																								
Dimensions	Ø26 x 588mm		Ø26 x 1198mm		Ø26 x 1498mm																																																						
Photometry																																																											
Illuminance at a Distance																																																											
	<table><thead><tr><th></th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>1m</td><td>70</td><td>2.71</td></tr><tr><td>2m</td><td>18</td><td>5.42</td></tr><tr><td>3m</td><td>8</td><td>8.13</td></tr><tr><td>4m</td><td>4</td><td>10.84</td></tr><tr><td>5m</td><td>2</td><td>13.55</td></tr></tbody></table>			Centre Beam Avg (lx)	Beam Diameter (m)	1m	70	2.71	2m	18	5.42	3m	8	8.13	4m	4	10.84	5m	2	13.55	<table><thead><tr><th></th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>1m</td><td>136</td><td>2.71</td></tr><tr><td>2m</td><td>34</td><td>5.42</td></tr><tr><td>3m</td><td>15</td><td>8.13</td></tr><tr><td>4m</td><td>8</td><td>10.84</td></tr><tr><td>5m</td><td>5</td><td>13.55</td></tr></tbody></table>			Centre Beam Avg (lx)	Beam Diameter (m)	1m	136	2.71	2m	34	5.42	3m	15	8.13	4m	8	10.84	5m	5	13.55	<table><thead><tr><th></th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>1m</td><td>162</td><td>2.71</td></tr><tr><td>2m</td><td>41</td><td>5.42</td></tr><tr><td>3m</td><td>18</td><td>8.13</td></tr><tr><td>4m</td><td>10</td><td>10.84</td></tr><tr><td>5m</td><td>6</td><td>13.55</td></tr></tbody></table>			Centre Beam Avg (lx)	Beam Diameter (m)	1m	162	2.71	2m	41	5.42	3m	18	8.13	4m	10	10.84	5m	6
	Centre Beam Avg (lx)	Beam Diameter (m)																																																									
1m	70	2.71																																																									
2m	18	5.42																																																									
3m	8	8.13																																																									
4m	4	10.84																																																									
5m	2	13.55																																																									
	Centre Beam Avg (lx)	Beam Diameter (m)																																																									
1m	136	2.71																																																									
2m	34	5.42																																																									
3m	15	8.13																																																									
4m	8	10.84																																																									
5m	5	13.55																																																									
	Centre Beam Avg (lx)	Beam Diameter (m)																																																									
1m	162	2.71																																																									
2m	41	5.42																																																									
3m	18	8.13																																																									
4m	10	10.84																																																									
5m	6	13.55																																																									
Luminous Light Distribution																																																											
	<table><thead><tr><th></th><th>0 ~ 180°</th><th>90 ~ 270°</th></tr></thead><tbody><tr><td>90°</td><td>40</td><td>40</td></tr><tr><td>75°</td><td>80</td><td>80</td></tr><tr><td>60°</td><td>120</td><td>120</td></tr><tr><td>45°</td><td>160</td><td>160</td></tr><tr><td>30°</td><td>200</td><td>200</td></tr></tbody></table>			0 ~ 180°	90 ~ 270°	90°	40	40	75°	80	80	60°	120	120	45°	160	160	30°	200	200	<table><thead><tr><th></th><th>0 ~ 180°</th><th>90 ~ 270°</th></tr></thead><tbody><tr><td>90°</td><td>80</td><td>80</td></tr><tr><td>75°</td><td>160</td><td>160</td></tr><tr><td>60°</td><td>240</td><td>240</td></tr><tr><td>45°</td><td>320</td><td>320</td></tr><tr><td>30°</td><td>400</td><td>400</td></tr></tbody></table>			0 ~ 180°	90 ~ 270°	90°	80	80	75°	160	160	60°	240	240	45°	320	320	30°	400	400	<table><thead><tr><th></th><th>0 ~ 180°</th><th>90 ~ 270°</th></tr></thead><tbody><tr><td>90°</td><td>100</td><td>100</td></tr><tr><td>75°</td><td>200</td><td>200</td></tr><tr><td>60°</td><td>300</td><td>300</td></tr><tr><td>45°</td><td>400</td><td>400</td></tr><tr><td>30°</td><td>500</td><td>500</td></tr></tbody></table>			0 ~ 180°	90 ~ 270°	90°	100	100	75°	200	200	60°	300	300	45°	400	400	30°	500
	0 ~ 180°	90 ~ 270°																																																									
90°	40	40																																																									
75°	80	80																																																									
60°	120	120																																																									
45°	160	160																																																									
30°	200	200																																																									
	0 ~ 180°	90 ~ 270°																																																									
90°	80	80																																																									
75°	160	160																																																									
60°	240	240																																																									
45°	320	320																																																									
30°	400	400																																																									
	0 ~ 180°	90 ~ 270°																																																									
90°	100	100																																																									
75°	200	200																																																									
60°	300	300																																																									
45°	400	400																																																									
30°	500	500																																																									

Ordering Information

Type	Series	Wattage	Colour Temperature
LTU	-	A	9 (9W) 18 (18W) 22 (22W)
			- CW (Cool white)

LTU-A18-CW: 18W LED Tube Light in Cool White



T8 LED Motion Sensor Tube Lighting



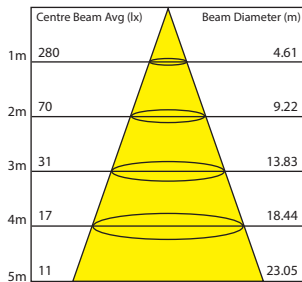
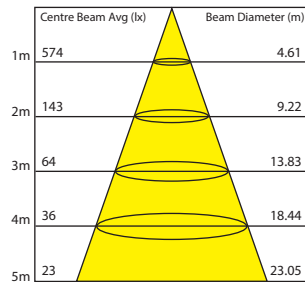
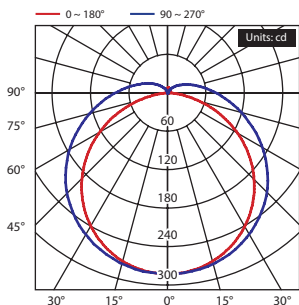
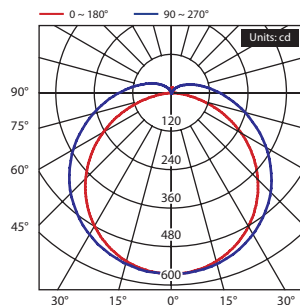
LTU-C Series: Motion sensor LED tubes in 600mm & 1200mm lengths (2ft/4ft)

Compound your LED energy savings by choosing ENSA™ Intelligent LED Tube Lighting which are not only 50% more energy efficient than conventional fluorescents, but utilise motion sensor technology to achieve impressively low total energy consumption. This makes them the perfect energy efficient light for areas with intermittent people traffic such as in apartment complexes, stairwells, walkways, university campuses and more.

LTU-C series tubes do not require a magnetic or electronic ballast, and each tube features an AC input at one end only and is supplied with an LED starter to replace fluorescent tube fuses. *(see installation diagrams)*

- Cut your energy use in half by switching to LED tubes.
- 360° passive infrared motion detection up to 8m radius.
- 60s delay after last detected motion, then dims to 30%.
- High luminous efficacy for optimal return on investment.
- Long lifespan LED lighting: rated for up to 50,000 hours.
- Supplied with replacement LED starter.

Series Specifications

Model	LTU-C9-CS		LTU-C18-CS																																				
Product Image																																							
Series Name	LTU-C Series T8 LED Motion Sensor Tube Lights																																						
Optical																																							
Light Output	750lm		1800lm																																				
Luminous Efficacy	83lm/W		100lm/W																																				
Colour Temperature	6000K																																						
Colour Rendering Index	> 80																																						
Beam Angle	120°																																						
Light Decay	< 15% at 20,000 hours																																						
Rated Lifespan	> 50,000 hours																																						
Electrical																																							
Power Consumption	9W		18W																																				
Input Voltage	85 ~ 265VAC		85 ~ 265VAC																																				
Power Factor	> 0.92																																						
Dimmable	Yes																																						
Detection																																							
Motion Detection	8m radius																																						
On-Time Delay	60s																																						
Standby Light Mode	30% brightness																																						
General																																							
Plug / Socket / Base	T8 size / G13 base																																						
Reflector / Diffuser	Frosted diffuser																																						
Housing Construction	Polycarbonate & aluminium																																						
Operating Environment	-25° ~ 40°C																																						
Dimensions	Ø26 x 600mm		Ø26 x 1200mm																																				
Photometry																																							
Illuminance at a Distance																																							
	<table><thead><tr><th></th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>1m</td><td>280</td><td>4.61</td></tr><tr><td>2m</td><td>70</td><td>9.22</td></tr><tr><td>3m</td><td>31</td><td>13.83</td></tr><tr><td>4m</td><td>17</td><td>18.44</td></tr><tr><td>5m</td><td>11</td><td>23.05</td></tr></tbody></table>			Centre Beam Avg (lx)	Beam Diameter (m)	1m	280	4.61	2m	70	9.22	3m	31	13.83	4m	17	18.44	5m	11	23.05	<table><thead><tr><th></th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>1m</td><td>574</td><td>4.61</td></tr><tr><td>2m</td><td>143</td><td>9.22</td></tr><tr><td>3m</td><td>64</td><td>13.83</td></tr><tr><td>4m</td><td>36</td><td>18.44</td></tr><tr><td>5m</td><td>23</td><td>23.05</td></tr></tbody></table>			Centre Beam Avg (lx)	Beam Diameter (m)	1m	574	4.61	2m	143	9.22	3m	64	13.83	4m	36	18.44	5m	23
	Centre Beam Avg (lx)	Beam Diameter (m)																																					
1m	280	4.61																																					
2m	70	9.22																																					
3m	31	13.83																																					
4m	17	18.44																																					
5m	11	23.05																																					
	Centre Beam Avg (lx)	Beam Diameter (m)																																					
1m	574	4.61																																					
2m	143	9.22																																					
3m	64	13.83																																					
4m	36	18.44																																					
5m	23	23.05																																					
Luminous Light Distribution																																							

Ordering Information

Type	Series		Wattage	Colour Temperature		Other Features
LTU	-	C	9 (9W) 18 (18W)	-	C (Cool white)	S (Sensor)
LTU-C18-CS: 18W LED Tube Light in Cool White with PIR Motion Sensing						



Linkable LED Strip Lighting

LEDBR Series: 13W in two colour temperatures, with surface & right angle brackets

The ENSA™ LED linkable strip light range offers energy efficient lighting in a uniquely versatile, slim package. Connect three LED strip lights together for a maximum 3.5m length LED light strip.

Each linkable strip light comes standard with light connectors, connector safety caps, and surface mount and right angle mount clips. The simple mounting clips enable implementation of the linkable strip light across a wide variety of applications including shelf and cabinet lighting, accent lighting, recessed wall-wash lighting and more.

- Unique, energy efficient linkable LED strip lighting.
- Connect up to 3 lights together; easy on/off switch.
- 78lm/W luminous efficacy & 30,000 hours service life.
- Available in 3000K warm white and 6500K cool white.
- Right angle & surface clips enable rapid light installation.
- Wide 135° beam angle and >80 colour rendering index.

Series Specifications

Model	LEDDBR13W													
Product Image														
Series Name	LEDDBR Series: Linkable LED Lighting													
Optical														
Light Output	1050lm													
Luminous Efficacy	78lm/W													
Colour Temperature	3000K / 6500K													
Colour Rendering Index	> 80													
Beam Angle	135°													
Light Decay	<10% at 6,000 hours													
Rated Lifespan	> 30,000 hours													
Electrical														
Power Consumption	13.5W													
Input Voltage	220 ~ 240VAC (50 ~ 60Hz)													
Power Factor	> 0.5													
Dimmable	N/A													
General														
Plug / Socket / Base	3-pin AC plug													
Reflector / Diffuser	Frosted diffuser													
Housing Construction	Polycarbonate & aluminium													
Operating Environment	-25° ~ +40°C													
Dimensions	1170 x 25 x 35mm													
Photometry														
Illuminance at a Distance	<table><thead><tr><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>257</td><td>1.73</td></tr><tr><td>64</td><td>3.46</td></tr><tr><td>29</td><td>5.19</td></tr><tr><td>16</td><td>6.93</td></tr><tr><td>10</td><td>10.39</td></tr></tbody></table>	Centre Beam Avg (lx)	Beam Diameter (m)	257	1.73	64	3.46	29	5.19	16	6.93	10	10.39	
Centre Beam Avg (lx)	Beam Diameter (m)													
257	1.73													
64	3.46													
29	5.19													
16	6.93													
10	10.39													
Diagrams														
Mounting Options														

Ordering Information

Type	Wattage	Colour Temperature
LEDDBR	13W (13.5W)	3K (Warm white) 65K (Cool white)
LEDDBR13W65K: 13W LED Linkable Strip Light in Cool White		



Premium Adjustable Body LED Downlights




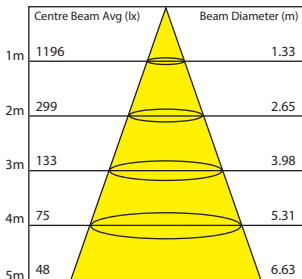
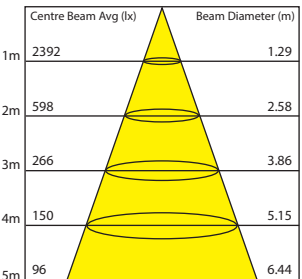
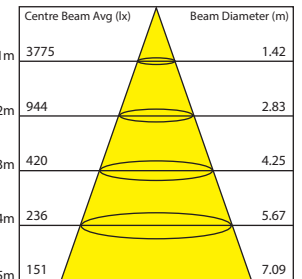
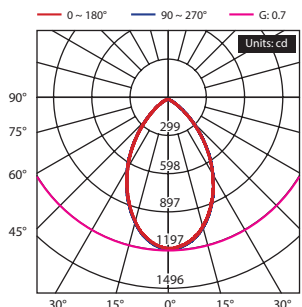
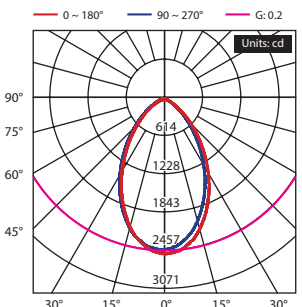
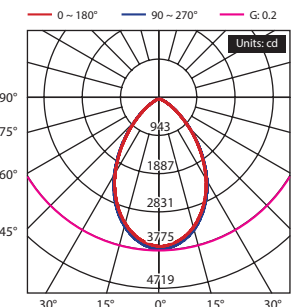
LEDDL Series: Tilt/rotate adjustable circular downlights in 20W, 38W and 60W models

Choose the ENSA™ premium range of adjustable LED downlights for the best in light output, service life, colour rendering accuracy and more. Available in cool and warm white colour temperatures, these downlights utilise high quality Samsung LEDs to provide a minimum of 95lm/W luminous efficacy and up to 50,000 hours rated LED lifespan.

Each downlight in the range can rotate 350° and tilt up to 60°, coupled with a 60° beam angle, these lights are perfect for versatile spot or key lighting in retail spaces, showrooms, foyers, office environments and more.

- Excellent alternative to halogen and metal-halide lamps.
- Ideal for use in shopfitting applications & large fitouts.
- Versatile: 350° rotation and 60° tilt adjustable housing.
- Minimalist, bevelled white gimble downlight surround.
- Samsung LEDs for optimal performance & lifespan.
- Hole cut size: Ø165mm (20W, 38W) and Ø215mm (60W).

Series Specifications

Model	LEDDL20WxKR		LEDDL38WxKR	LEDDL60WxKR
Product Image				
Series Name	LEDDL Series: Premium Adjustable Series LED Downlights			
Optical				
Light Output	1890lm	3640lm	6300lm	
Luminous Efficacy	95lm/W	96lm/W	105lm/W	
Colour Temperature	3000K / 5500K			
Colour Rendering Index	> 80			
Beam Angle	60°			
Light Decay	30% at 25,000 hours			
Rated Lifespan	> 50,000 hours			
Electrical				
Power Consumption	20W	38W	60W	
Input Voltage	85 ~ 265VAC			
Power Factor	> 0.9			
Dimmable	N/A			
General				
Plug / Socket / Base	3-pin AC plug with external driver			
Reflector / Diffuser	Frosted diffuser			
Housing Adjustments	Tilt 60°/ Rotate 350°			
Operating Environment	-20°C ~ 40°C			
Dimensions	Ø195 x 175mm		Ø250 x 144mm	
Hole Cut Size	Ø165mm		Ø215mm	
Photometry				
Illuminance at a Distance				
				
Luminous Light Distribution				
				

Ordering Information

Type	Wattage	Colour Temperature	Other Features
LEDDL	20W (20W) 38W (38W) 60W (60W)	3K (Warm white) 5K (Cool white)	R (Round)
LEDDL20W3KR: 20W Round Adjustable Downlight in Warm White			



Premium Adjustable Body LED Downlights

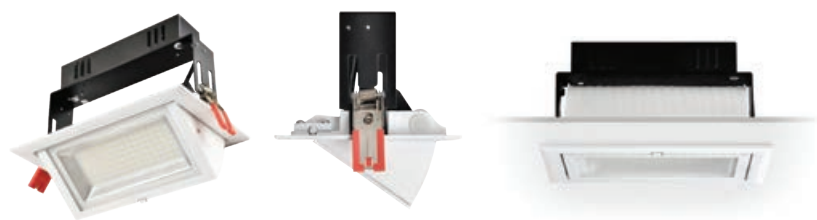
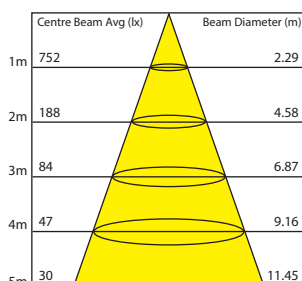
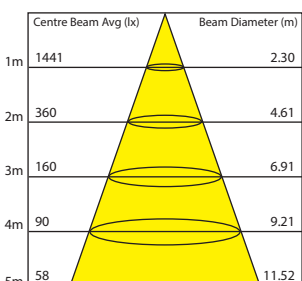
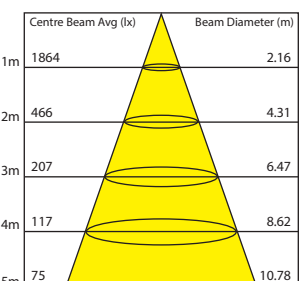
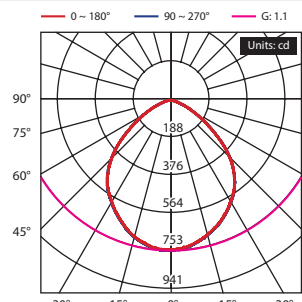
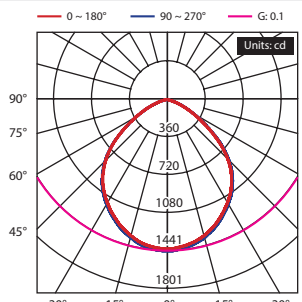
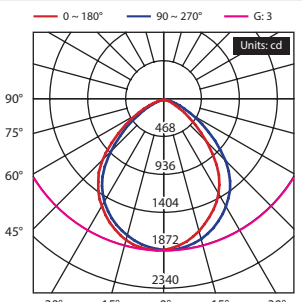
LEDDL5 Series: Tilt adjustable rectangular downlights in 20W, 38W and 48W models

Choose the ENSA™ premium range of adjustable LED downlights for the best in light output, service life, colour rendering accuracy and more. Available in cool and warm white colour temperatures, these downlights utilise high quality Samsung LEDs to provide a minimum of 98lm/W luminous efficacy and up to 50,000 hours rated LED lifespan.

Each downlight in the range can tilt up to 60° and features a wide beam angle of 120°. Their rectangular shape and light distribution makes them ideal for bay lighting, signage illumination and wall highlighting, especially in retail environments.

- Excellent alternative to halogen and metal-halide lamps.
- Ideal for use in shopfitting applications & large fit-outs.
- Samsung LEDs for optimal performance & lifespan.
- Minimalist, bevelled white gimble downlight surround.
- 60° tilt adjustable & frosted diffuser for glare reduction.
- Uniform hole cut size across range: 227 x 130mm.

Series Specifications

Model	LEDDL20WxKS		LEDDL38WxKS		LEDDL48WxKS																																				
Product Image																																									
Series Name	LEDDL5 Series: Premium Rectangular Adjustable Series LED Downlights																																								
Optical																																									
Light Output	1950lm		3750lm		4760lm																																				
Luminous Efficacy	98lm/W		99lm/W		100lm/W																																				
Colour Temperature	3000K / 5500K																																								
Colour Rendering Index	>80																																								
Beam Angle	120°																																								
Light Decay	30% at 25,000 hours																																								
Rated Lifespan	> 50,000 hours																																								
Electrical																																									
Power Consumption	20W		38W		48W																																				
Input Voltage	85 ~ 265VAC																																								
Power Factor	> 0.9																																								
Dimmable	No																																								
General																																									
Plug / Socket / Base	3-pin AC plug with external driver																																								
Reflector / Diffuser	Frosted diffuser																																								
Housing Adjustments	Tilt 60°																																								
Operating Environment	-20°C ~ 40°C																																								
Dimensions	240 x 145 x 135mm																																								
Hole Cut Size	227 x 130mm																																								
Photometry																																									
Illuminance at a Distance																																									
	<table><thead><tr><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>752</td><td>2.29</td></tr><tr><td>188</td><td>4.58</td></tr><tr><td>84</td><td>6.87</td></tr><tr><td>47</td><td>9.16</td></tr><tr><td>30</td><td>11.45</td></tr></tbody></table>		Centre Beam Avg (lx)	Beam Diameter (m)	752	2.29	188	4.58	84	6.87	47	9.16	30	11.45	<table><thead><tr><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>1441</td><td>2.30</td></tr><tr><td>360</td><td>4.61</td></tr><tr><td>160</td><td>6.91</td></tr><tr><td>90</td><td>9.21</td></tr><tr><td>58</td><td>11.52</td></tr></tbody></table>		Centre Beam Avg (lx)	Beam Diameter (m)	1441	2.30	360	4.61	160	6.91	90	9.21	58	11.52	<table><thead><tr><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>1864</td><td>2.16</td></tr><tr><td>466</td><td>4.31</td></tr><tr><td>207</td><td>6.47</td></tr><tr><td>117</td><td>8.62</td></tr><tr><td>75</td><td>10.78</td></tr></tbody></table>		Centre Beam Avg (lx)	Beam Diameter (m)	1864	2.16	466	4.31	207	6.47	117	8.62	75
Centre Beam Avg (lx)	Beam Diameter (m)																																								
752	2.29																																								
188	4.58																																								
84	6.87																																								
47	9.16																																								
30	11.45																																								
Centre Beam Avg (lx)	Beam Diameter (m)																																								
1441	2.30																																								
360	4.61																																								
160	6.91																																								
90	9.21																																								
58	11.52																																								
Centre Beam Avg (lx)	Beam Diameter (m)																																								
1864	2.16																																								
466	4.31																																								
207	6.47																																								
117	8.62																																								
75	10.78																																								
Luminous Light Distribution																																									
	<table><thead><tr><th>Beam Angle (°)</th><th>Illuminance (cd)</th></tr></thead><tbody><tr><td>0°</td><td>188</td></tr><tr><td>15°</td><td>376</td></tr><tr><td>30°</td><td>564</td></tr><tr><td>45°</td><td>753</td></tr><tr><td>60°</td><td>941</td></tr></tbody></table>		Beam Angle (°)	Illuminance (cd)	0°	188	15°	376	30°	564	45°	753	60°	941	<table><thead><tr><th>Beam Angle (°)</th><th>Illuminance (cd)</th></tr></thead><tbody><tr><td>0°</td><td>360</td></tr><tr><td>15°</td><td>720</td></tr><tr><td>30°</td><td>1080</td></tr><tr><td>45°</td><td>1441</td></tr><tr><td>60°</td><td>1801</td></tr></tbody></table>		Beam Angle (°)	Illuminance (cd)	0°	360	15°	720	30°	1080	45°	1441	60°	1801	<table><thead><tr><th>Beam Angle (°)</th><th>Illuminance (cd)</th></tr></thead><tbody><tr><td>0°</td><td>468</td></tr><tr><td>15°</td><td>936</td></tr><tr><td>30°</td><td>1404</td></tr><tr><td>45°</td><td>1872</td></tr><tr><td>60°</td><td>2340</td></tr></tbody></table>		Beam Angle (°)	Illuminance (cd)	0°	468	15°	936	30°	1404	45°	1872	60°
Beam Angle (°)	Illuminance (cd)																																								
0°	188																																								
15°	376																																								
30°	564																																								
45°	753																																								
60°	941																																								
Beam Angle (°)	Illuminance (cd)																																								
0°	360																																								
15°	720																																								
30°	1080																																								
45°	1441																																								
60°	1801																																								
Beam Angle (°)	Illuminance (cd)																																								
0°	468																																								
15°	936																																								
30°	1404																																								
45°	1872																																								
60°	2340																																								

Ordering Information

Type	Wattage	Colour Temperature	Other Features
LEDDL	20W (20W) 38W (38W) 48W (48W)	3K (Warm white) 5K (Cool white)	S (Rectangular)
LEDDL20W5KS: 20W Rectangular Adjustable Downlight in Cool White			



Premium Fixed Body LED Downlights


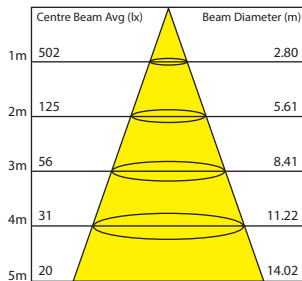
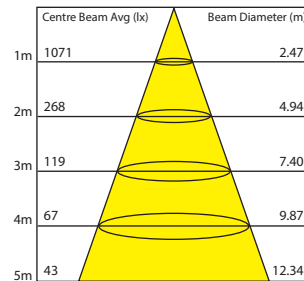
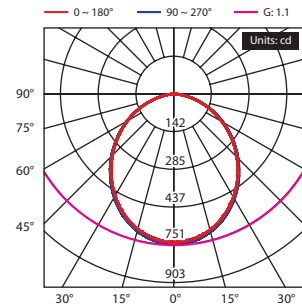
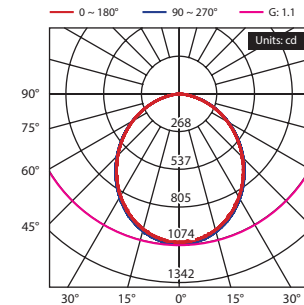
LEDDL RD Series: Dimmable downlights in 20W, 36W and 48W, in two colour temperatures

Choose the ENSA™ premium range of fixed LED downlights for the best in light output, service life, colour rendering accuracy and more. Available in cool and warm white colour temperatures, these downlights utilise high quality Samsung LEDs to provide a minimum of 92lm/W luminous efficacy and up to 50,000 hours rated LED lifespan.

With a 100° beam angle and circular light distribution, these lights are designed to provide evenly distributed, high quality light perfect for general purpose illumination in store fit-outs, galleries, residential and office environments and more.

- 100lm/W high efficiency, low energy use LED downlights.
- 6" and 8" total diameter, suitable for retrofit installations.
- Excellent colour rendering, lifespan and light output.
- Minimalist, bevelled white gimble downlight surround.
- Each downlight model features TRIAC dimming.
- Hole cut size: Ø165mm (20W, 36W) and Ø205mm (48W).

Series Specifications

Model	LEDDL20WxK6RD		LEDDL36WxK6RD	LEDDL48WxK8RD																																			
Product Image																																							
Series Name	LEDDL RD Series: Premium Fixed Dimmable Series LED Downlights																																						
Optical																																							
Light Output	1835lm		3370lm	4600lm																																			
Luminous Efficacy	92lm/W		94lm/W	96lm/W																																			
Colour Temperature	3000K / 5500K																																						
Colour Rendering Index	> 80																																						
Beam Angle	100°																																						
Light Decay	30% at 25,000 hours																																						
Rated Lifespan	>50,000 hours																																						
Electrical																																							
Power Consumption	20W		36W	48W																																			
Input Voltage	100 ~ 240VAC																																						
Power Factor	> 0.9																																						
Dimmable	Yes (TRIAC)																																						
General																																							
Plug / Socket / Base	3-pin AC plug with external driver																																						
Reflector / Diffuser	Frosted diffuser																																						
Housing Adjustments	N/A																																						
Operating Environment	-20 ~ +40°C																																						
Dimensions	Ø195x 56mm			Ø245 x 54mm																																			
Hole Cut Size	Ø165mm			Ø205mm																																			
Photometry																																							
Illuminance at a Distance																																							
	<table><tr><th>Distance (m)</th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr><tr><td>1m</td><td>502</td><td>2.80</td></tr><tr><td>2m</td><td>125</td><td>5.61</td></tr><tr><td>3m</td><td>56</td><td>8.41</td></tr><tr><td>4m</td><td>31</td><td>11.22</td></tr><tr><td>5m</td><td>20</td><td>14.02</td></tr></table>		Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)	1m	502	2.80	2m	125	5.61	3m	56	8.41	4m	31	11.22	5m	20	14.02	<table><tr><th>Distance (m)</th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr><tr><td>1m</td><td>1071</td><td>2.47</td></tr><tr><td>2m</td><td>268</td><td>4.94</td></tr><tr><td>3m</td><td>119</td><td>7.40</td></tr><tr><td>4m</td><td>67</td><td>9.87</td></tr><tr><td>5m</td><td>43</td><td>12.34</td></tr></table>		Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)	1m	1071	2.47	2m	268	4.94	3m	119	7.40	4m	67	9.87	5m	43
Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)																																					
1m	502	2.80																																					
2m	125	5.61																																					
3m	56	8.41																																					
4m	31	11.22																																					
5m	20	14.02																																					
Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)																																					
1m	1071	2.47																																					
2m	268	4.94																																					
3m	119	7.40																																					
4m	67	9.87																																					
5m	43	12.34																																					
Luminous Light Distribution																																							
	<table><tr><th>Beam Angle (°)</th><th>Units: cd</th></tr><tr><td>0°</td><td>142</td></tr><tr><td>15°</td><td>285</td></tr><tr><td>30°</td><td>437</td></tr><tr><td>45°</td><td>751</td></tr><tr><td>60°</td><td>903</td></tr></table>		Beam Angle (°)	Units: cd	0°	142	15°	285	30°	437	45°	751	60°	903	<table><tr><th>Beam Angle (°)</th><th>Units: cd</th></tr><tr><td>0°</td><td>268</td></tr><tr><td>15°</td><td>537</td></tr><tr><td>30°</td><td>805</td></tr><tr><td>45°</td><td>1074</td></tr><tr><td>60°</td><td>1342</td></tr></table>		Beam Angle (°)	Units: cd	0°	268	15°	537	30°	805	45°	1074	60°	1342											
Beam Angle (°)	Units: cd																																						
0°	142																																						
15°	285																																						
30°	437																																						
45°	751																																						
60°	903																																						
Beam Angle (°)	Units: cd																																						
0°	268																																						
15°	537																																						
30°	805																																						
45°	1074																																						
60°	1342																																						

Ordering Information

Type	Wattage	Colour Temperature	Other Features
LEDDL	20W (20W) 36W (38W) 48W (48W)	3K (Warm white) 5K (Cool white)	6 / 8 (Ø inches) R (Round) D (Dimmable)
LEDDL48W5K8RD: 48W Round Fixed Dimmable Downlight in Cool White			



Commercial Adjustable Body LED Downlights







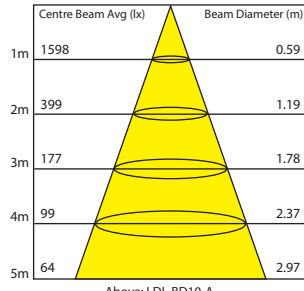
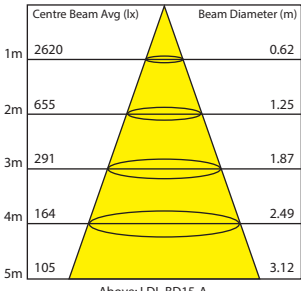
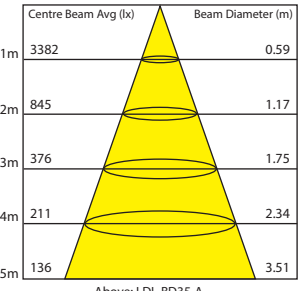
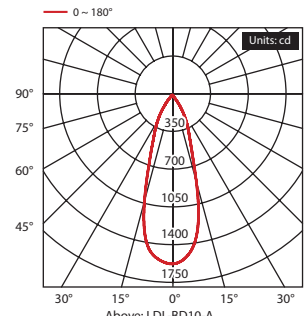
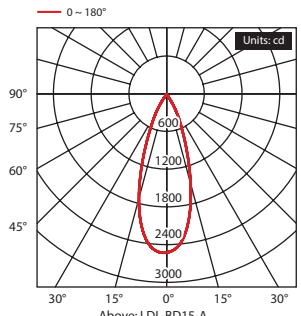
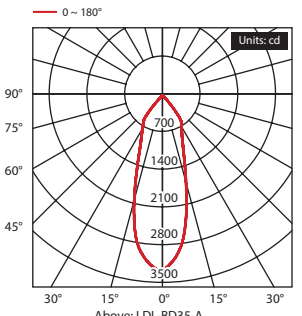
LDL-BD Adjustable Series: Available in six dimmable models, in two colour temperatures

Available in a wide range of wattages and hole cut sizes to suit your installation needs, the ENSA™ LDL-BD adjustable commercial downlight series delivers energy efficient, dimmable downlights for every application. With focused beam angles across the range, LDL-BD adjustable series downlights provide concentrated light distribution, ideal for key and spot lighting.

Each downlight can be tailored to your specifications, featuring an adjustable housing with 40° of lateral tilt ($\pm 20^\circ$). The series is available in 3000K warm white and 6000K cool white models with an average luminous efficacy of 70lm/W across the range.

- Available in 10W, 12W, 15W, 25W, 35W and 45W models.
- Average beam angle of 35°, ideal for spot & key lighting.
- Dimmable, energy efficient replacement for halogens.
- Rounded, white gimble surround & clear glass diffuser.
- Lateral tilt adjustable housing $\pm 20^\circ$ from origin.
- Hole cut sizes ranging from Ø75mm ~ Ø160mm.

Series Specifications

Model	LDL-BD10-A		LDL-BD12-A		LDL-BD15-A		LDL-BD25-A		LDL-BD35-A		LDL-BD45-A	
Product Image												
Series Name	LDL-BD Series: Adjustable Dimmable LED Downlights											
Optical												
Light Output	700lm		800lm		1050lm		1800lm		2600lm		3200lm	
Luminous Efficacy	70lm/W		68lm/W		70lm/W		72lm/W		74lm/W		71lm/W	
Colour Temperature	3000K / 6000K											
Colour Rendering Index	> 80											
Beam Angle	30°		35°		35°		35°		35°		45°	
Light Decay	< 30% at 10,000 hours											
Rated Lifespan	>35,000 hours											
Electrical												
Power Consumption	10W		12W		15W		25W		35W		45W	
Input Voltage	100 ~ 240VAC											
Power Factor	> 0.9											
Dimmable	Yes											
General												
Plug / Socket / Base	3-pin AC plug with external driver											
Reflector / Diffuser	Clear diffuser											
Housing Adjustments	-20° ~ +20° Lateral tilt											
Operating Environment	-20 ~ +40°C											
Dimensions	Ø95 x 81mm		Ø110 x 88mm		Ø119 x 103mm		Ø142 x 118mm		Ø180 x 129mm		Ø193 x 129mm	
Hole Cut Size	Ø75mm		Ø80mm		Ø90mm		Ø110mm		Ø145mm		Ø160mm	
Photometry												
Illuminance at a Distance												
	Above: LDL-BD10-A				Above: LDL-BD15-A				Above: LDL-BD35-A			
Luminous Light Distribution												
	Above: LDL-BD10-A				Above: LDL-BD15-A				Above: LDL-BD35-A			

Ordering Information

Type	Series		Wattage		Housing Style	Colour Temperature
LDL	-	BD	10 (10W)	-	A (Adjustable)	C (Cool white) W (Warm white)
			12 (12W)			
			15 (15W)			
			25 (25W)			
			35 (35W)			
			45 (45W)			
LDL-BD45-AW: 45W Dimmable Adjustable LED Downlight in Warm White						



Recessed Adjustable Body LED Downlights



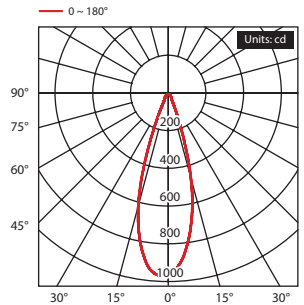
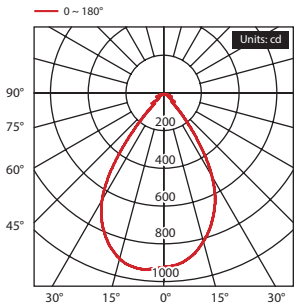
LDL-BC Series: Available in 10W and 12W dimmable models, in two colour temperatures

The ENSA™ LDL-BC series comprises a unique range of downlights, available in standard lens and recessed lens models. Standard lens models offer a concentrated circular light distribution with 60° beam angle. All models are dimmable.

Designed to be discreet, recessed lens models have the lens front positioned away from the light opening. Combined with their 20° narrow beam angle and tilt-adjustable housing, they subtly cast light that is free of glare when viewed from almost all angles. Light openings for recessed models are available in circle and elliptical openings.

- Tilt adjustable LED downlights in 10W and 12W models.
- Dimmable, energy efficient replacement for halogens.
- Lateral tilt adjustable housing $\pm 20^\circ$ from origin.
- Flat-surface, low-profile white gimble (recessed models).
- Simple, stylish bevelled white gimble (standard models).
- Hole cut size: Ø80mm (10W) and Ø70mm (12W).

Series Specifications

Model	LDL-BC10-A1		LDL-BC10-A2	LDL-BC12-A																																																						
Product Image																																																										
Series Name	LDL-BC Deep-Recessed Adjustable Dimmable LED Downlights			LDL-BC Adjustable Dimmable LED Downlights																																																						
Optical																																																										
Light Output	650lm			900lm																																																						
Luminous Efficacy	65lm/W			75lm/W																																																						
Colour Temperature	3000K / 6000K																																																									
Colour Rendering Index	> 80																																																									
Beam Angle	20°			60°																																																						
Light Decay	< 30% at 10,000 hours																																																									
Rated Lifespan	>35,000 hours																																																									
Electrical																																																										
Power Consumption	10W			12W																																																						
Input Voltage	100 ~ 240VAC																																																									
Power Factor	> 0.9																																																									
Dimmable	Yes																																																									
General																																																										
Plug / Socket / Base	3-pin AC plug with external driver																																																									
Reflector / Diffuser	Ellipse shape; deep recessed 'invisible' lens	Circle shape; deep recessed 'invisible' lens		Clear lens/diffuser																																																						
Housing Adjustments	-20° ~ +20° Lateral Tilt																																																									
Operating Environment	-20 ~ +40°C																																																									
Dimensions	Ø92 x 92mm			Ø100 x 90mm																																																						
Hole Cut Size	Ø80mm			Ø70mm																																																						
Photometry																																																										
Illuminance at a Distance	<table><thead><tr><th></th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>1m</td><td>963</td><td>0.58</td></tr><tr><td>2m</td><td>241</td><td>1.16</td></tr><tr><td>3m</td><td>107</td><td>1.73</td></tr><tr><td>4m</td><td>60</td><td>2.31</td></tr><tr><td>5m</td><td>39</td><td>2.89</td></tr></tbody></table>		Centre Beam Avg (lx)	Beam Diameter (m)	1m	963	0.58	2m	241	1.16	3m	107	1.73	4m	60	2.31	5m	39	2.89	<table><thead><tr><th></th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>1m</td><td>948</td><td>0.58</td></tr><tr><td>2m</td><td>237</td><td>1.16</td></tr><tr><td>3m</td><td>105</td><td>1.74</td></tr><tr><td>4m</td><td>59</td><td>2.32</td></tr><tr><td>5m</td><td>38</td><td>2.90</td></tr></tbody></table>		Centre Beam Avg (lx)	Beam Diameter (m)	1m	948	0.58	2m	237	1.16	3m	105	1.74	4m	59	2.32	5m	38	2.90	<table><thead><tr><th></th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>1m</td><td>824</td><td>1.51</td></tr><tr><td>2m</td><td>189</td><td>3.46</td></tr><tr><td>3m</td><td>77</td><td>5.89</td></tr><tr><td>4m</td><td>25</td><td>7.46</td></tr><tr><td>5m</td><td>11</td><td>10.22</td></tr></tbody></table>			Centre Beam Avg (lx)	Beam Diameter (m)	1m	824	1.51	2m	189	3.46	3m	77	5.89	4m	25	7.46	5m	11	10.22
	Centre Beam Avg (lx)	Beam Diameter (m)																																																								
1m	963	0.58																																																								
2m	241	1.16																																																								
3m	107	1.73																																																								
4m	60	2.31																																																								
5m	39	2.89																																																								
	Centre Beam Avg (lx)	Beam Diameter (m)																																																								
1m	948	0.58																																																								
2m	237	1.16																																																								
3m	105	1.74																																																								
4m	59	2.32																																																								
5m	38	2.90																																																								
	Centre Beam Avg (lx)	Beam Diameter (m)																																																								
1m	824	1.51																																																								
2m	189	3.46																																																								
3m	77	5.89																																																								
4m	25	7.46																																																								
5m	11	10.22																																																								
Luminous Light Distribution																																																										

Ordering Information

Type	Series		Wattage		Housing Style	Colour Temperature	Other
LDL	-	BC	10 (10W) 12 (12W)	-	A (Adjustable)	C (Cool white) W (Warm white)	1 ~ 9 (Identifier)
LDL-BC10-AC2: 10W Dimmable Adjustable LED Downlight in Cool White							



Commercial Fixed Body LED Downlights





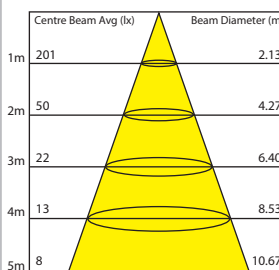
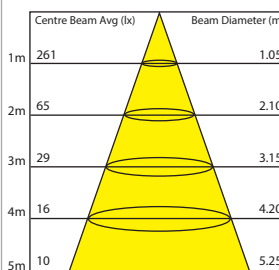
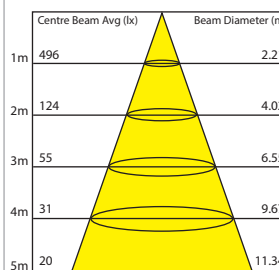
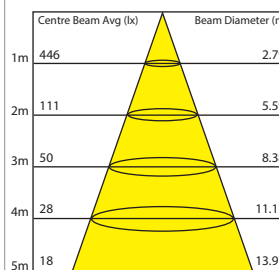
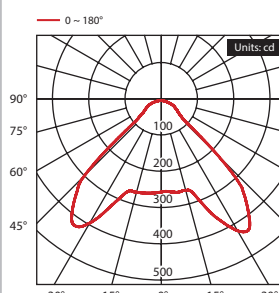
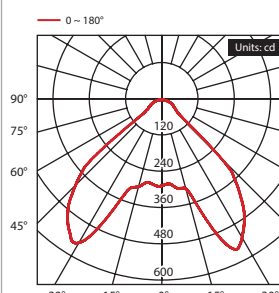
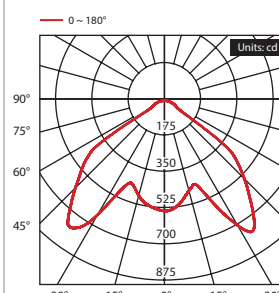
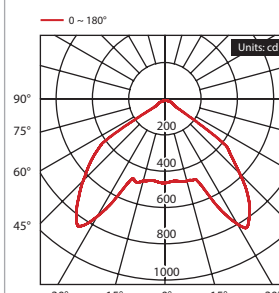
LDL-BD Fixed Series: Available in four dimmable models, in two colour temperatures

Available in a wide range of wattages and hole cut sizes to suit your installation needs, the ENSA™ LDL-BD fixed commercial downlight series delivers energy efficient, dimmable downlights for every application.

LDL-BD fixed series downlights are an affordable, energy efficient upgrade for existing halogen downlights. They are available in a variety of hole cut sizes and beam angles, and come in 3000K warm white and 6000K cool white colour temperatures. Each downlight in the series is dimmable and features a simple and stylish white gimble surround and partially frosted diffuser.

- Available in 9W, 15W, 20W, and 30W models.
- Average luminous efficacy of 74lm/W across the range.
- Dimmable, energy efficient replacement for halogens.
- Recessed, white gimble with partially frosted diffuser.
- Long life LEDs with 35,000 hours rated service life.
- Hole cut sizes ranging from Ø95mm ~ Ø195mm.

Series Specifications

Model	LDL-BD9-F		LDL-BD15-F		LDL-BD20-F		LDL-BD30-F																																																	
Product Image																																																								
Series Name	LDL-BD Series: Fixed Dimmable LED Downlights																																																							
Optical																																																								
Light Output	700lm		1100lm		1500lm		2100lm																																																	
Luminous Efficacy	78lm/W		74lm/W		75lm/W		70lm/W																																																	
Colour Temperature	3000K / 6000K																																																							
Colour Rendering Index	> 80																																																							
Beam Angle	95°		36°		75°		108°																																																	
Light Decay	< 30% at 10,000 hours																																																							
Rated Lifespan	>35,000 hours																																																							
Electrical																																																								
Power Consumption	9W		15W		20W		30W																																																	
Input Voltage	100 ~ 240VAC																																																							
Power Factor	> 0.9																																																							
Dimmable	Yes																																																							
General																																																								
Plug / Socket / Base	3-pin AC plug with external driver																																																							
Reflector / Diffuser	Partially frosted diffuser																																																							
Housing Adjustments	N/A																																																							
Operating Environment	-20 ~ +40°C																																																							
Dimensions	Ø105 x 48mm		Ø140 x 60mm		Ø190 x 60mm		Ø230 x 72mm																																																	
Hole Cut Size	Ø95mm		Ø120mm		Ø165mm		Ø195mm																																																	
Photometry																																																								
Illuminance at a Distance																																																								
	<table><thead><tr><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>201</td><td>2.13</td></tr><tr><td>50</td><td>4.27</td></tr><tr><td>22</td><td>6.40</td></tr><tr><td>13</td><td>8.53</td></tr><tr><td>8</td><td>10.67</td></tr></tbody></table>		Centre Beam Avg (lx)	Beam Diameter (m)	201	2.13	50	4.27	22	6.40	13	8.53	8	10.67	<table><thead><tr><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>261</td><td>1.05</td></tr><tr><td>65</td><td>2.10</td></tr><tr><td>29</td><td>3.15</td></tr><tr><td>16</td><td>4.20</td></tr><tr><td>10</td><td>5.25</td></tr></tbody></table>		Centre Beam Avg (lx)	Beam Diameter (m)	261	1.05	65	2.10	29	3.15	16	4.20	10	5.25	<table><thead><tr><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>496</td><td>2.21</td></tr><tr><td>124</td><td>4.02</td></tr><tr><td>55</td><td>6.55</td></tr><tr><td>31</td><td>9.67</td></tr><tr><td>20</td><td>11.34</td></tr></tbody></table>		Centre Beam Avg (lx)	Beam Diameter (m)	496	2.21	124	4.02	55	6.55	31	9.67	20	11.34	<table><thead><tr><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>446</td><td>2.79</td></tr><tr><td>111</td><td>5.59</td></tr><tr><td>50</td><td>8.38</td></tr><tr><td>28</td><td>11.17</td></tr><tr><td>18</td><td>13.97</td></tr></tbody></table>		Centre Beam Avg (lx)	Beam Diameter (m)	446	2.79	111	5.59	50	8.38	28	11.17	18	13.97
	Centre Beam Avg (lx)	Beam Diameter (m)																																																						
	201	2.13																																																						
	50	4.27																																																						
22	6.40																																																							
13	8.53																																																							
8	10.67																																																							
Centre Beam Avg (lx)	Beam Diameter (m)																																																							
261	1.05																																																							
65	2.10																																																							
29	3.15																																																							
16	4.20																																																							
10	5.25																																																							
Centre Beam Avg (lx)	Beam Diameter (m)																																																							
496	2.21																																																							
124	4.02																																																							
55	6.55																																																							
31	9.67																																																							
20	11.34																																																							
Centre Beam Avg (lx)	Beam Diameter (m)																																																							
446	2.79																																																							
111	5.59																																																							
50	8.38																																																							
28	11.17																																																							
18	13.97																																																							
Luminous Light Distribution																																																								
																																																								
	<table><thead><tr><th>Units: cd</th></tr></thead><tbody><tr><td>100</td></tr><tr><td>200</td></tr><tr><td>300</td></tr><tr><td>400</td></tr><tr><td>500</td></tr></tbody></table>		Units: cd	100	200	300	400	500	<table><thead><tr><th>Units: cd</th></tr></thead><tbody><tr><td>120</td></tr><tr><td>240</td></tr><tr><td>360</td></tr><tr><td>480</td></tr><tr><td>600</td></tr></tbody></table>		Units: cd	120	240	360	480	600	<table><thead><tr><th>Units: cd</th></tr></thead><tbody><tr><td>175</td></tr><tr><td>350</td></tr><tr><td>525</td></tr><tr><td>700</td></tr><tr><td>875</td></tr></tbody></table>		Units: cd	175	350	525	700	875	<table><thead><tr><th>Units: cd</th></tr></thead><tbody><tr><td>200</td></tr><tr><td>400</td></tr><tr><td>600</td></tr><tr><td>800</td></tr><tr><td>1000</td></tr></tbody></table>		Units: cd	200	400	600	800	1000																								
	Units: cd																																																							
	100																																																							
	200																																																							
300																																																								
400																																																								
500																																																								
Units: cd																																																								
120																																																								
240																																																								
360																																																								
480																																																								
600																																																								
Units: cd																																																								
175																																																								
350																																																								
525																																																								
700																																																								
875																																																								
Units: cd																																																								
200																																																								
400																																																								
600																																																								
800																																																								
1000																																																								

Ordering Information

Type	Series	Wattage	Housing Style	Colour Temperature		
LDL	-	BD	9 (9W) 15 (15W) 20 (20W) 30 (30W)	-	F (Fixed)	C (Cool white) W (Warm white)
LDL-BD9-FW: 9W Dimmable Fixed LED Downlight in Warm White						



Commercial Fixed Body LED Cabinet Lights



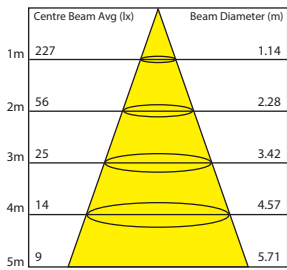
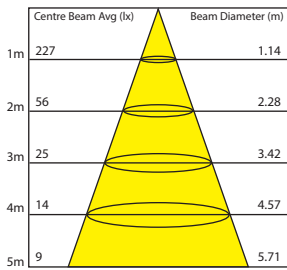
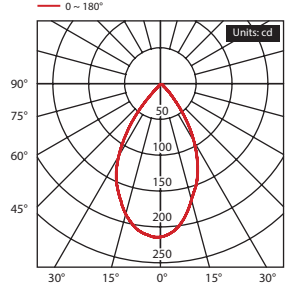
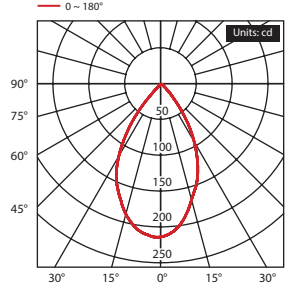
LDL-BA Series: Available in two styles and two colour temperatures

The commercial fixed LED cabinet light range from ENSA™ comprises small and efficient LED fixtures available in two styles and hole cut sizes to suit your installation needs.

The LDL-BA series features uniquely packaged LED cabinet lights, with six individual lights operating on a single transformer. This makes them ideal in showrooms and stores for shelf and display case illumination. They are available in square or round design, in cool and warm white colour temperatures.

- Set of six dimmable LED cabinet lights with single driver.
- Spot 45° beam angle for concentrated light distribution.
- 200lm light output, equivalent to 15W halogen.
- Ideal energy efficient lighting replacement for halogens.
- Long life LEDs: minimum 35,000 hours rated service life.
- Hole cut sizes ranging from Ø28mm ~ Ø38mm.

Series Specifications

Model	LDL-BA3-F1	LDL-BA3-F2																																				
Product Image																																						
Series Name	LDL-BA Series: LED Cabinet Lights																																					
Optical																																						
Light Output	200lm																																					
Luminous Efficacy	67lm/W																																					
Colour Temperature	3000K / 6000K																																					
Colour Rendering Index	> 80																																					
Beam Angle	45°																																					
Light Decay	< 3% at 6,000 hours																																					
Rated Lifespan	>35,000 hours																																					
Electrical																																						
Power Consumption	3W per light (6 pcs total)																																					
Input Voltage	100 ~ 240VAC																																					
Power Factor	> 0.9																																					
Dimmable	Yes																																					
General																																						
Plug / Socket / Base	3-pin AC plug with external driver																																					
Reflector / Diffuser	Clear reflector lens																																					
Housing Adjustments	N/A																																					
Operating Environment	-20 ~ +40°C																																					
Dimensions	Ø44 x 42mm	Ø50 x 38mm																																				
Hole Cut Size	Ø28mm	Ø38mm																																				
Photometry																																						
Illuminance at a Distance	<table><thead><tr><th></th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>1m</td><td>227</td><td>1.14</td></tr><tr><td>2m</td><td>56</td><td>2.28</td></tr><tr><td>3m</td><td>25</td><td>3.42</td></tr><tr><td>4m</td><td>14</td><td>4.57</td></tr><tr><td>5m</td><td>9</td><td>5.71</td></tr></tbody></table> 		Centre Beam Avg (lx)	Beam Diameter (m)	1m	227	1.14	2m	56	2.28	3m	25	3.42	4m	14	4.57	5m	9	5.71	<table><thead><tr><th></th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>1m</td><td>227</td><td>1.14</td></tr><tr><td>2m</td><td>56</td><td>2.28</td></tr><tr><td>3m</td><td>25</td><td>3.42</td></tr><tr><td>4m</td><td>14</td><td>4.57</td></tr><tr><td>5m</td><td>9</td><td>5.71</td></tr></tbody></table> 		Centre Beam Avg (lx)	Beam Diameter (m)	1m	227	1.14	2m	56	2.28	3m	25	3.42	4m	14	4.57	5m	9	5.71
	Centre Beam Avg (lx)	Beam Diameter (m)																																				
1m	227	1.14																																				
2m	56	2.28																																				
3m	25	3.42																																				
4m	14	4.57																																				
5m	9	5.71																																				
	Centre Beam Avg (lx)	Beam Diameter (m)																																				
1m	227	1.14																																				
2m	56	2.28																																				
3m	25	3.42																																				
4m	14	4.57																																				
5m	9	5.71																																				
Luminous Light Distribution																																						

Ordering Information

Type	Series	Wattage	Housing Style	Colour Temperature	Other		
LDL	-	BA	3 (3W)	-	F (Fixed)	C (Cool white) W (Warm white)	1~2 (Identifier)
LDL-BA3-FW1: 3W Dimmable Fixed LED Downlight in Warm White							



Residential Fixed Body LED Downlights

LDL-BB / A Series: Variety of styles and wattages, in multiple colour temperatures






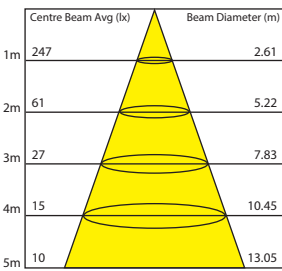
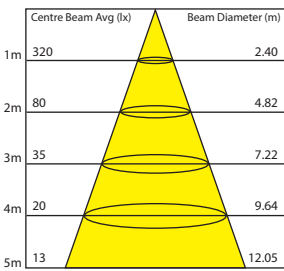
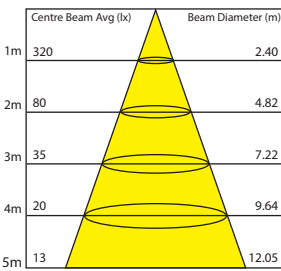
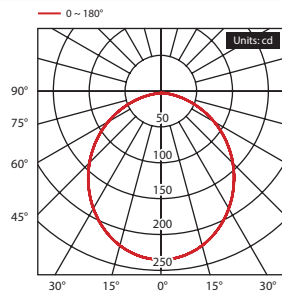
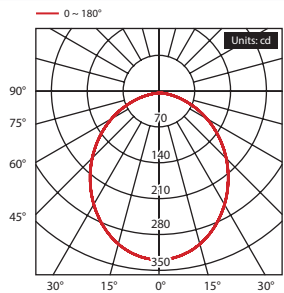
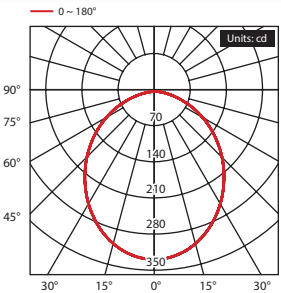
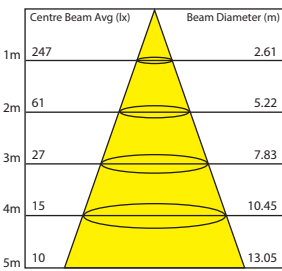
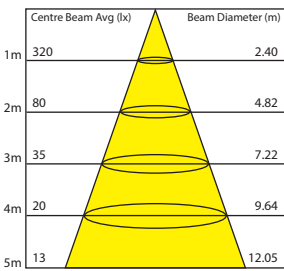
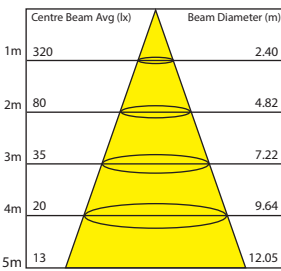
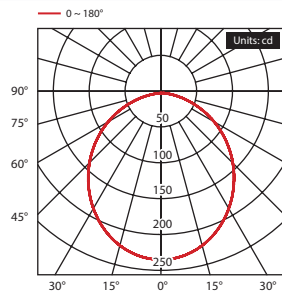
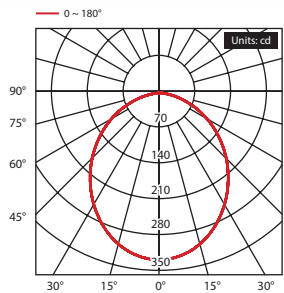
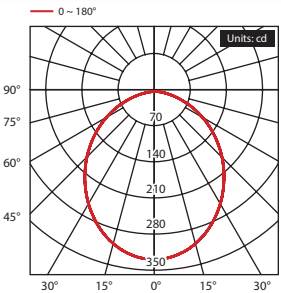
The residential fixed LED downlight range from ENSA™ comprises small and efficient LED fixtures in variety of styles, wattages and hole cut sizes to suit your installation needs.

The LDL-BB and LDL-A series downlights are small form factor LED fixtures available in flat and bevelled gimble styles, in cool and warm white colour temperatures. The LDL-BB13-FM downlights feature both warm and cool white LEDs which allows you to cycle through three colour temperatures - warm white (3000K), natural white (4500K) and cool white (6000K).

- LDL-BB series: Bevelled or flat style dimmable downlights.
- LDL-BB13-FM series: 3 switchable colour temperatures.
- LDL-A series: Bevelled style 85lm/W LED downlights.
- Ideal energy efficient lighting replacement for halogens.
- Long life LEDs: minimum 30,000 hours rated service life.
- Hole cut sizes ranging from Ø75mm ~ Ø150mm.

LDL-BB/A SERIES | COMMERCIAL DOWNLIGHTS

Series Specifications

Model	LDL-BB10-F		LDL-BB10-F(2)	LDL-BB12-F	LDL-BB13-FM	LDL-A12
Product Image						
Series Name	LDL-BB Series Dimmable LED Downlights					LDL-A Series Fixed
Optical						
Light Output	700lm	800lm	850lm	845lm	1020lm	
Luminous Efficacy	70lm/W	80lm/W	71lm/W	65lm/W	85lm/W	
Colour Temperature	3000K / 6000K			(x3) Switchable		3000K / 6500K
Colour Rendering Index	> 80			> 75		> 75
Beam Angle	120°	120°	95°	100°	110°	
Light Decay	< 3% at 6,000 hours	< 30% at 10,000 hours	< 3% at 6,000 hours	< 10% at 10,000 hours	< 3% at 6,000 hours	
Rated Lifespan	>35,000 hours			> 30,000 hours		
Electrical						
Power Consumption	10W	10W	12W	13W	12W	
Input Voltage	100 ~ 240VAC					
Power Factor	> 0.9					
Dimmable	Yes			Yes (TRIAC)		N/A
General						
Plug / Socket / Base	3-pin AC plug with external driver					
Reflector / Diffuser	Frosted diffuser					
Housing Adjustments	N/A					
Operating Environment	-20 ~ +40°C					
Dimensions	Ø90 x 45mm	Ø115 x 58mm	Ø110 x 50mm	Ø110 x 50mm	Ø175 x 68mm	
Hole Cut Size	Ø75mm	Ø90mm	Ø90mm	Ø90mm	Ø150mm	
Photometry						
Illuminance at a Distance						
	LDL-BB10-F		LDL-BB12-F		LDL-BB13_FM	
						
	LDL-BB10-F		LDL-BB12-F		LDL-BB13_FM	
Luminous Light Distribution						
	LDL-BB10-F		LDL-BB12-F		LDL-BB13_FM	
						
	LDL-BB10-F		LDL-BB12-F		LDL-BB13_FM	

Ordering Information

Type	Series	Wattage	Housing Style	Colour Temperature	Other
LDL	BB	10 (10W) 12 (12W) 13 (13W)	F (Fixed)	C (Cool white) W (Warm white) M (Multi-coloured)	I (Integrated Driver) 1~9 (Identifier)
	A		N/A	CW (Cool white) WW (Warm white)	N/A

LDL-BB10-FW: 10W Dimmable Fixed LED Downlight in Warm White



LED Retrofit Bulb Lighting







LBL-B Series: Available in a variety of styles and wattages, in two colour temperatures




Available in a variety of base fixtures, input voltages, wattages and colour temperatures, the LBL series of LED retrofit bulbs provides an easy path to energy efficient, long life LED illumination. They are available in G4, G9, E14, E27 and E40 bases.

LBL-BA series G4 and LBL-BB series G9 base lights are ideal replacements for halogen lamps and are used in cabinet lights, designer fittings, RV & caravan lamps, in bathrooms & kitchens and more. The LBL-BC series E14 base lights replace small fittings such as those found in appliance lighting, whereas the much larger LBL-BD (E27 base) and BE (E40 base) series lights are heavy duty LED replacements for inefficient lamp post bulbs and metal-halide high bay bulbs.

- Replacement bulbs for a wide range of base fixtures.
- Improve energy efficiency & save on relamping costs.
- 30,000 hours rated service life and high colour accuracy.
- Power flexible: Includes 12VDC and 240VAC input models.

Series Specifications

Model	LBL-BA3-1	LBL-BA3-2	LBL-BA3-3	LBL-BA2	LBL-BB5-1	LBL-BB5-2
Product Image						
Series Name	LBL-BA Series G4 Base LED Bulbs				LBL-BB Series G9 Base LED Bulbs	
Optical						
Light Output	200lm	200lm	300lm	140lm	360lm	550lm
Luminous Efficacy	67lm/W	67lm/W	100lm/W	70lm/W	65lm/W	100lm/W
Colour Temperature	3000K / 6000K					
Colour Rendering Index	>80					
Beam Angle	360°			180°	360°	
Light Decay	<15% at 10,000 hours					
Rated Lifespan	30,000 hours					
Electrical						
Power Consumption	3W			2W	5.5W	
Input Voltage	12VDC	240VAC	12VDC	12VDC	240VAC	240VAC
Power Factor	>0.4	>0.4	>0.4	>0.4	>0.6	>0.5
Dimmable	N/A					
General						
Construction / Material	Silicon base		Ceramic base	Plastic base	Silicon base	Ceramic base
Plug / Socket / Base	G4 bi-pin				G9 bi-pin	
Operating Environment	-20 ~ +40°C					
Dimensions	Ø15 x 43mm	Ø16 x 43mm	Ø15 x 44mm	20 x 30mm	Ø17 x 61mm	Ø15 x 60mm

Model	LBL-BC1	LBL-BD36	LBL-BE120
Product Image			
Series Name	LBL-BC Series E14 Base Retrofit Bulbs	LBL-BD Series E27 Base Retrofit Bulbs	LBL-BE Series E40 Base Retrofit Bulbs
Optical			
Light Output	120lm	3600lm	12000lm
Luminous Efficacy	80lm/W	100lm/W	
Colour Temperature	3000K / 6000K		
Colour Rendering Index	>80		
Beam Angle	360°		
Light Decay	<15% at 10,000 hours		
Rated Lifespan	30,000 hours		
Electrical			
Power Consumption	1.5W	36W	120W
Input Voltage	220 ~ 240VAC	85 ~ 265VAC	
Power Factor	>0.80	>0.95	
Dimmable	N/A		
General			
Construction / Material	Glass / Ceramic	Aluminium / Polycarbonate	
Plug / Socket / Base	E14 screw	E27 screw	E40 screw
Operating Environment	-20 ~ +40°C		
Dimensions	Ø23 x 50mm	Ø93 x 222mm	Ø120 x 354mm

Ordering Information

Type	Series	Wattage	Colour Temperature	Other
LBL	- BA BB	2 (2W) 3 (3W) 5 (5.5W)	- C (Cool white) W (Warm white)	1~9
LBL-BA3-W2: 3W G4 Base LED Retrofit Bulb in Warm White				

Type	Series	Wattage	Colour Temperature
LBL	- BC BD BE	1 (1.5W) 36 (36W) 120 (120W)	- C (Cool white) W (Warm white)
LBL-BD36-C: 36W E27 Base LED Retrofit Bulb in Cool White			



LED Retrofit Globe Lighting



LEDBL / GL Series: Variety of wattages in E27, B22, GU10, GU5.3 and PL G24 style fittings




The ENSA™ LED light globe series provides a variety of energy efficient LED bulbs, ideal for replacing shorter-lifespan, higher energy use incandescent, halogen and compact fluorescent bulbs. They are a perfect lighting solution for general purpose illumination.

Each ENSA™ LED light globe features a frosted diffuser to remove harsh LED glare, is available in cool & warm white temperatures and comes with a 10 year return-to-base warranty (excludes PL G24 lights, visit www.ensalife.com for full warranty terms)

This series is available in a variety of wattages and base fittings to handle all types of lighting upgrades. Form factors include standard light bulb replacements available in E27 screw base and B22 bayonet fitting; MR16 downlight bulb replacements in GU5.3 12V bi-pin fitting and GU10 240V bayonet fitting; and PL style fluorescent replacements in 2-pin & 4-pin variations.

Series Specifications

Model	BL6WE27	BL9WE27	BL11WE27	BL6WB22	BL9WB22	BL11WB22
Product Image						
Series Name	E27 Screw LED Globe Series			B22 Bayonet LED Globe Series		
Optical						
Light Output	485lm	795lm	1025lm	485lm	795lm	1025lm
Luminous Efficacy	75lm/W	84lm/W	93lm/W	75lm/W	84lm/W	93lm/W
Colour Temperature	3000K / 6500K					
Colour Rendering Index	>80					
Beam Angle	160°					
Light Decay	<10% at 6,000 hours					
Rated Lifespan	30,000 hours					
Electrical						
Power Consumption	6.5W	9.5W	11W	6.5W	9.5W	11W
Input Voltage	220 ~ 240VAC					
Power Factor	>0.5					
Dimmable	N/A					
General						
Construction / Material	Aluminium & plastic					
Plug / Socket / Base	E27			B22		
Operating Environment	-25° ~ +40°C					
Dimensions	Ø60 x 107mm					

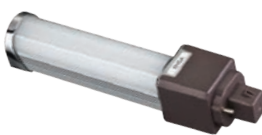Model	GL5WMR		GL5WGU	G24D10W	G24Q10W
Product Image					
Series Name	MR16 LED Downlight Series			G24 LED PL Light Series	
Optical					
Light Output	410lm			960lm	
Luminous Efficacy	75lm/W			>90lm/W	
Colour Temperature	3000K / 6500K			3000K / 5500K	
Colour Rendering Index	>80			>80	
Beam Angle	105°			145°	
Light Decay	<10% after 6,000 hours			<15% after 20,000 hours	
Rated Lifespan	30,000 hours			32,000 hours	
Electrical					
Power Consumption	5.5W			10W	
Input Voltage	12VDC	220 ~ 240VAC		85 ~ 265VAC	
Power Factor	>0.5			>0.9	
Dimmable	N/A			N/A	
General					
Construction / Material	Aluminium & polycarbonate				
Plug / Socket / Base	GU5.3	GU10		G24D 2-pin / 180° rotatable base	G24Q 4-pin / 180° rotatable base
Operating Environment	-25° ~ +40°C		-20° ~ 65°C / 80%RH (max)		
Dimensions	Ø51 x 50mm		Ø56 x 50mm		35 x 35 x 181mm

Ordering Information

Type	Wattage	Base Fitting	Colour Temperature
LEDBL	6W (6.5W)	E27 (E27 Screw)	3K (Warm white)
	9W (9.5W)	B22 (B22 Bayonet)	65K (Cool white)
	11W (11W)		
LEDGL	5W (5.5W)	GU (GU10 Bayonet)	3K (Warm white)
		MR (GU5.3 Bi-pin)	65K (Cool white)
LEDBL6WE2765K: 6.5W LED Globe with E27 Base in Cool White			

Type	Base Fitting	Wattage	Colour Temperature
LEDG24	D (2-pin) Q (4-pin)	10W (10W)	3K (Warm white) 5K (Cool white)
LEDG24Q10W3K: 10W LED PL Light with 4-pin Base in Warm White			



Intelligent Motion Sensor & Dusk/Dawn Switches








ENSA-MS/PS/LC Series: Microwave motion, PIR motion & light sensors in a variety of styles

The ENSA™ intelligent energy saving switch series comprises a wide range of automated, smart switches that use a variety of different sensors to control light use. This innovative combination of sensors ensures your lights will only turn on when you need them to, saving you on power costs and reducing the impact on the environment.

Each intelligent switch features adjustable light sensing, movement sensing and on-timer delay so you may tailor light use to your exact specifications. The range includes models with 5.8GHz microwave or passive infrared (PIR) for movement sensing.





Once installed, the switch's daylight sensor measures ambient light levels. If light levels fall below the set limit, the motion sensor is activated. Upon detecting motion, the switch will turn the connected light on. When movement is no longer detected, the switch's adjustable on-timer delay will keep the light on for a designated period of time. Once this delay has expired, the switch turns the light off automatically.

Sensor Switches | Series Specifications

Model	ENSA-PS1	ENSA-PS2	ENSA-PS3	ENSA-MS1	ENSA-MS2	ENSA-MS3	ENSA-MS6
Product Image							
Daylight Sensor	•	•	•	•	•	•	•
Passive Infrared Sensor	•	•	•	•	•	•	•
Microwave Sensor	•	•	•	•	•	•	•
On-timer Delay	•	•	•	•	•	•	•
Electrical							
Input Voltage	220 ~ 240VAC 50Hz						
Power Consumption (Sensing Mode)	0.5W	0.4W	0.5W	0.9W	0.9W	0.2W	0.9W
Max. Rated Load (Resistive/Inductive)	1200W / 300W	2000W / 1000W	800W / 400W	500W / 200W	1200W / 300W	1200W / 300W	1200W / 300W
Detection Adjustments							
Daylight Sensing	3 ~ 2000 Lux						
Motion Detection Area	180° arc	360° rectangle	360° circle	360° circle	360° circle	180° arc	180° arc
Motion Detection Range	12m	4 x 20m	6m	2 ~ 8m	1 ~ 8m	1 ~ 8m	5 ~ 15m
Motion Detection Speed	0.6 ~ 1.5m/s						
On-timer Delay	10s ~ 7min	10s ~ 30min	10s ~ 15min	5s ~ 10min	10s ~ 12min	10s ~ 12min	3s ~ 12min
General							
Ingress Protection	IP65	IP20	IP20	Indoor use only	IP20	IP44	IP65
Operating Environment	-20 ~ 40°C / <93% Relative humidity						
Mounting Type	Wall/ceiling	Ceiling	Recessed ceiling	Wall/ceiling	Ceiling	Wall/ceiling	Wall/ceiling
Rec. Installation Height	1.8 ~ 2.5m	4 ~ 10m	2.2 ~ 4m	1.8 ~ 3.5m	1.5 ~ 3.5m	1.5 ~ 3.5m	1.5 ~ 3.5m
Dimensions	80 x 120 x 50mm	100 x 100 x 50mm	Ø50 x 65mm	40 x 60 x 25mm	Ø100 x 40mm	100 x 75 x 85mm	80 x 120 x 50mm

* Sensors switches must be installed by a licensed electrician.

Dusk / Dawn Switches | Series Specifications

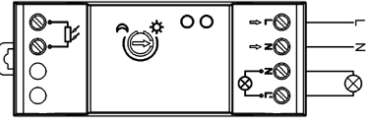Model	ENSA-LC1	ENSA-LC3
Product Image		
Electrical		
Input Voltage	220 ~ 240VAC 50Hz	
Dimming Range	5 ~ 50 Lux	2 ~ 100 Lux
Rated Current	10A	20A
General		
Ingress Protection	IP44	IP65 (photocell only)
Operating Environment	-20 ~ 40°C / <93% Relative humidity	
Recommended Install	Place above light	Switchboard enclosure/cabinet
Dimensions	Ø82 x 108mm	35 x 66 x 90mm (1m cable)
Diagrams		
Dimensions		

* Sensors switches must be installed by a licensed electrician.



2 Channel Mains Voltage Receiver (433.92MHz)


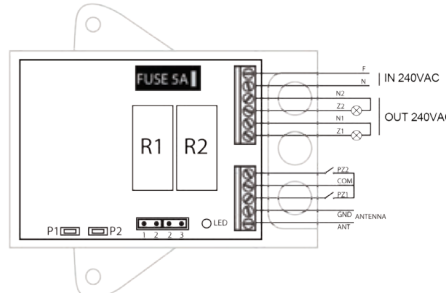
ENSA-RS Series: Trigger lights automatically by connecting to universal transmitters

Automate your LED lighting with the ENSA-RS1 2 channel 240VAC mains voltage RF receiver. With a maximum rated load of up to 1000W, you can integrate wireless triggering for a large number of lights via this receiver. The receiver shell is IP55 rated and suitable for external use.

The ENSA-RS1 includes two keyfobs for light control. The receiver can also be triggered by up to 128 universal transmitters. This includes wireless passive infrared detectors, beam/curtain detectors and door/window reed switches. This makes the ENSA-RS1 ideal for effective security lighting applications.

Contact your local ENSA™ professional for more information on universal wireless detector integration. Wireless transmitters are optional and sold separately.

Wireless Receiver | Series Specifications

Model	ENSA-RS1
Product Image	
Frequency	433.92MHz fixed code
Range (LoS)	100m
Programmable Outputs	2 relay outputs (latched or timed)
Maximum Codes	128
Electrical	
Input Voltage	240VAC 50 ~ 60Hz
Maximum Rated Load	1000W
General	
Ingress Protection	IP55
Included Remotes	2
Operating Environment	-20 ~ 55°C
Diagram	

Universal Transmitters | Additional Information



The ENSA-RS1 can be configured to have up to 128 universal transmitters. It is compatible with a wide range of wireless sensors, including:

- **Wireless reed & roller shutter reed switches:** Ideal for trigger lights on open/close, garages, sheds, warehouses, halls, on windows etc.
- **Passive infrared detectors:** Standard pet immune, ceiling mount and solar powered external sensors; perfect for triggering lights on general motion detection. Great for energy saving in intermittent people traffic areas.
- **Infrared beam presence detector:** Ideal for wireless curtain beam detection, eg: gates, walkways, corridors, fences, etc.



Daylight Harvesting Control Systems

Harvest ambient light to maximise your energy efficiency and power savings

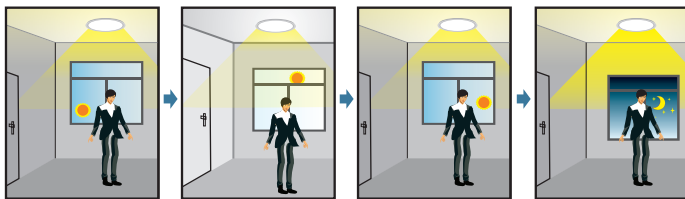
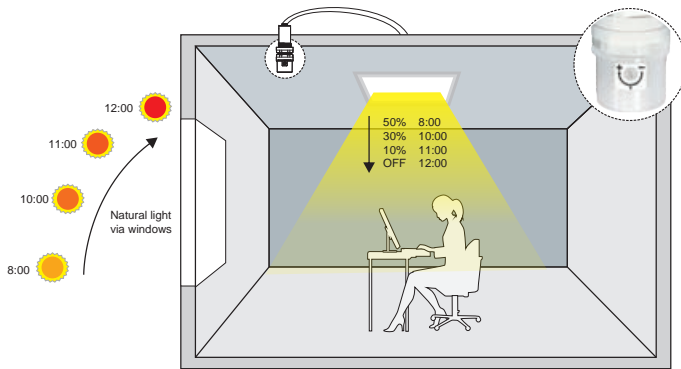
As the cost of energy rises, more builders and architects are incorporating natural light as a primary source of illumination in modern buildings. Using natural light is an excellent way to increase energy efficiency and can create more comfortable living and work spaces.

ENSA™ daylight harvesting control systems are designed to take full advantage of the natural light sources in your building to deliver optimal lighting performance and reductions in power costs. Implement automated lighting controls that dim or turn off your artificial lighting in response to available daylight in the space.

- Boost your efficiency by maximising use of natural light.
- Add daylight harvesting to any dimmable lighting system.
- Set target light levels to automate light dimming.
- Compatible with most 0~10V dimmable LED drivers.

Daylight Harvesting Light Sensor


The ENSA daylight sensors can be set to dim or brighten your lights to achieve a predetermined light level. This is performed easily via a potentiometer on the sensor.



As ambient light levels rise and fall during the day, the ENSA-LC2 controls the brightness of artificial lights to reach target light levels set via the potentiometer sensor.


Integrating Motion Detection

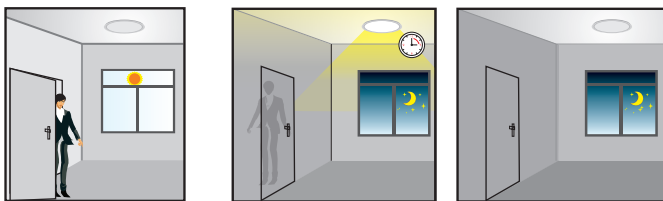The ENSA-LC2 can be augmented by an ENSA-MS4 microwave motion sensor to include motion detection control and standby dimming, alongside daylight harvesting control.




If the ENSA-LC2 detects sufficient ambient light levels, controlled lights remain off, regardless of motion detected by the ENSA-MS4.

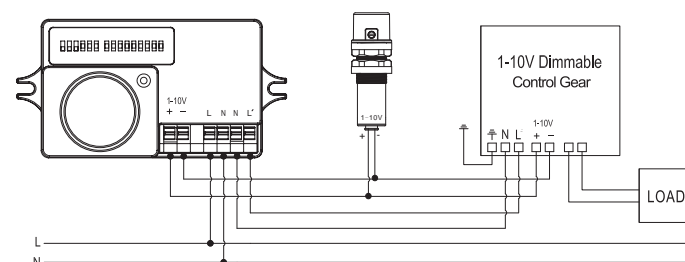When ambient light levels fall below the set target, the ENSA-MS4 switches the light on upon detecting movement. If ambient light levels are below the set target, after the last detected motion the ENSA-MS4 will switch off after a standby period. The standby delay period and standby brightness levels are configurable on the ENSA-MS4.



Model	ENSA-LC2
Product Image	
Electrical	
Input Voltage	1 ~ 10VDC
Dimming Range	1 ~ 100%
Max. Current Sink	50mA (maximum)
General	
Ingress Protection	IP20
Operating Environment	0° ~ 45°C
Installation Height	4m
Dimensions	Ø22 x 70mm (800mm cable)
Diagrams	
Dimensions	

Model	ENSA-MS4
Product Image	
Electrical	
Input Voltage	220 ~ 240VAC 50 ~ 60Hz
Power Consumption	0.5W (standby) / 1W (operation)
Max. Rated Load	1200W (resistive) / 800W (inductive)
Detection Adjustments	
Daylight Sensing	5lx / 10lx / 30lx / 50lx / Disabled
Motion Detection Range	Ø16m x 10m
Motion Detection Angle	150° (wall) or 360° (ceiling)
Motion Detection Speed	0.5 ~ 3.0m/s
Detection Sensitivity	100% / 75% / 50% / 25% / 10%
On-timer Delay	10s / 30s / 90s / 3min / 20min / 30min
Stand-by Period	5s / 5min / 10min / 30min / 60min / Disabled
Stand-by Dimming	10% / 20% / 30% / 50%
General	
Ingress Protection	IP20
Operating Environment	-35° ~ 70°C
Installation Height	Max. 10m
Dimensions	101 x 52 x 26mm
Diagrams	

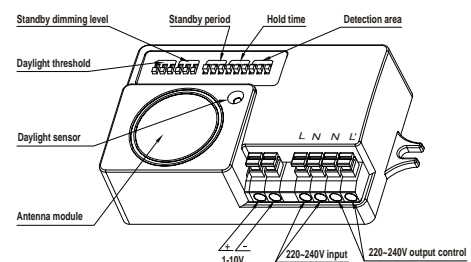

Guide to ENSA Range

Helping compare lighting technologies and defining colour temperature

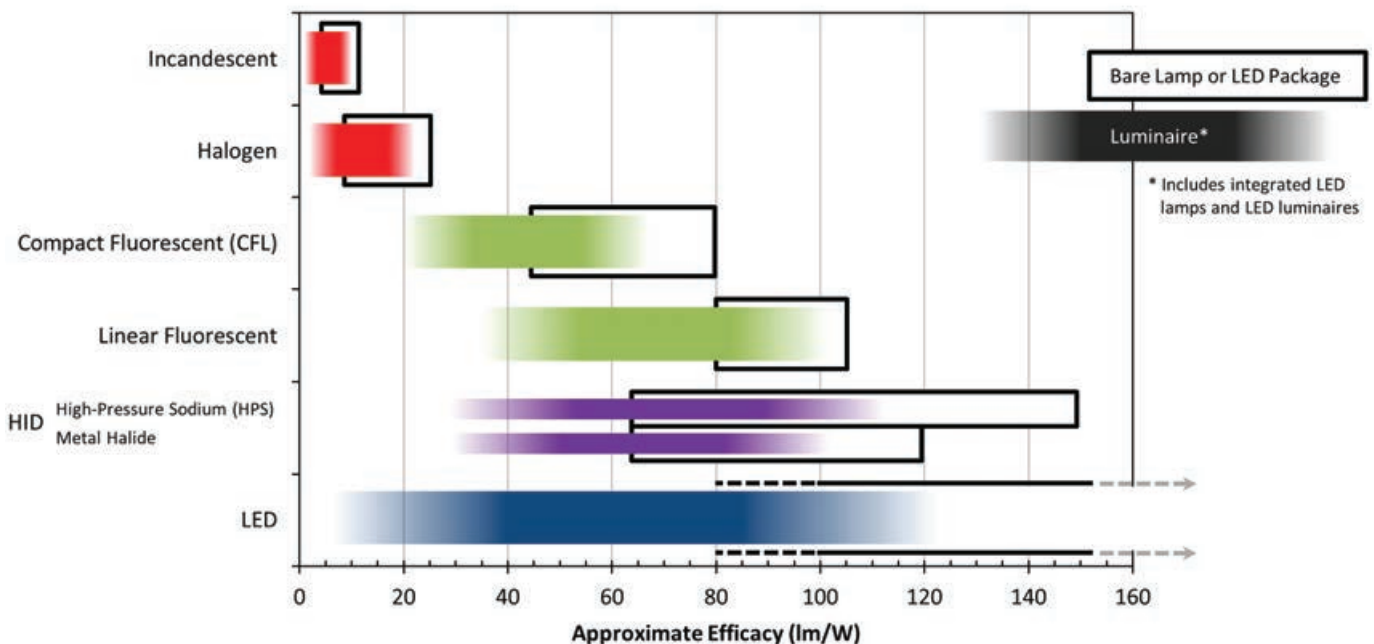
Information presented is intended as a guide only. While care is taken to ensure accuracy, actual results may vary.

Comparing Lighting Technologies

Shown below are an approximate range of luminous efficacy for different lighting technologies. This graph details initial lamp luminous efficacy only and doesn't compare technological advantages such as instant on/off, colour accuracy, robustness, etc.

When comparing lighting technologies, you should also consider:


- **Lumen depreciation:** How efficient will the light be as it progresses towards end of life?
- **Application efficacy:** How efficient is the optical system (reflectors, lenses) at delivering light in the intended purpose?
- **System design:** Is performance hindered by driver losses or poor heat dissipation? Does the lamp require a ballast?



Approximate range of efficacy for various common light sources, as of January 2013. The black boxes show the efficacy of bare conventional lamps or LED packages, which can vary based on construction, materials, wattage, or other factors. The shaded regions show luminaire efficacy, which considers the entire system, including driver, thermal, and optical losses. Of the light source technologies listed, only LED is expected to make substantial increases in efficacy in the near future. US Department of Energy (March, 2013)

Defining Colour Temperature

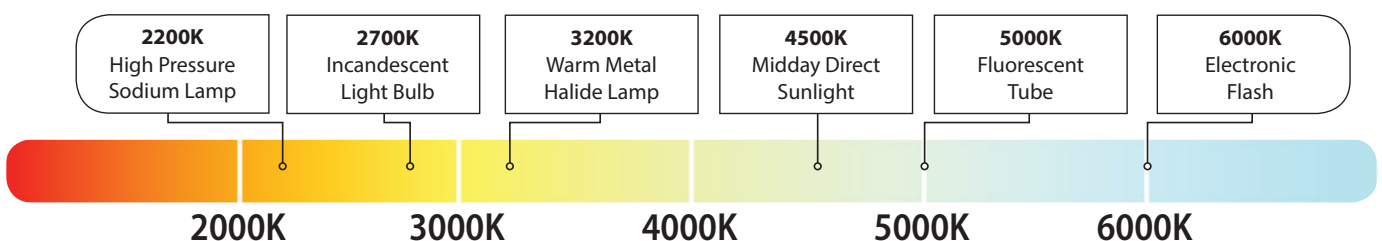The ENSA LED lighting range is available in a number of colour temperatures to suit your needs. Below is a reference scale charting existing light sources and their colour temperature. Use this chart as an approximate guide when selecting from our LED lighting range.




ENSA LED Tube Light Installation Guide

Please note that this guide applies only to fluorescent light fixtures fitted with standard Magnetic Ballasts. Installation in lighting fixtures using Electronic Ballasts or non-standard magnetic ballasts will require rewiring by a qualified electrician.

- ❶ Turn off power at the light switch and leave the light off for at least 10 minutes to cool down.
- ❷ Remove the fluorescent tube and fluorescent starter from the light fixture, disposing of them accordingly.
- ❸ Replace the fluorescent starter with the included "LED STARTER" fuse included with the LED tube light.
- ❹ Fit the new LED tube light into the light fixture and turn on the light switch to test.

Wiring diagrams below are a reference only. All installations should be carried out by a qualified electrician.

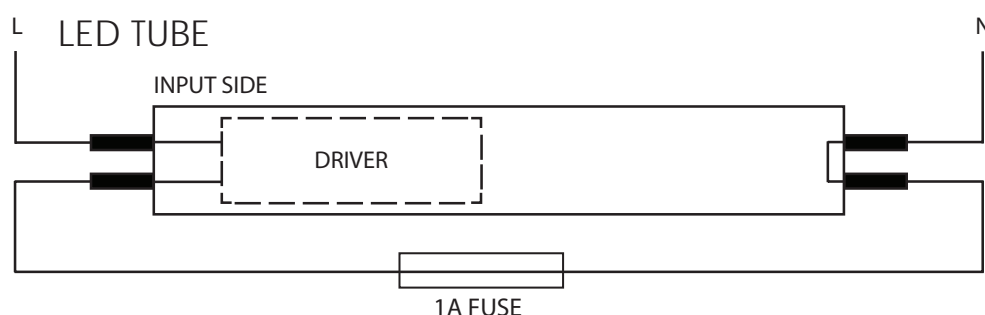
Installation Method 1 - New Installation



Notes

- To avoid potentially damaging short circuit, wire as per the diagram left.
- FOR SAFETY REASONS: You **MUST** add 1A Fuse as per the diagram.

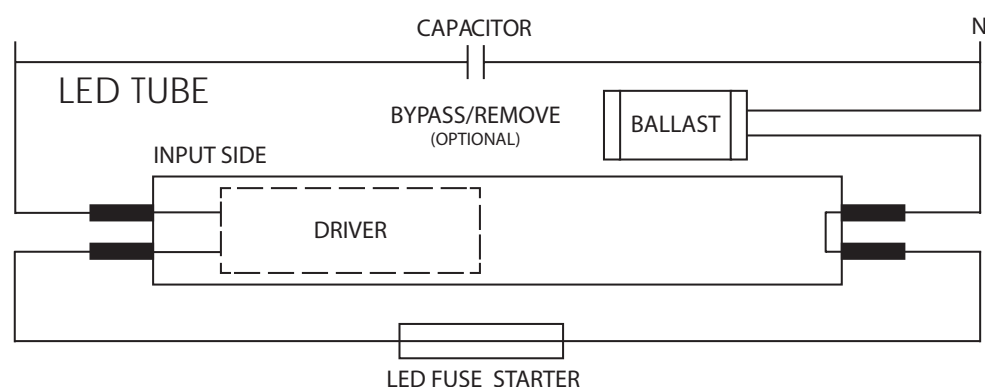
Installation Method 2 - Magnetic Ballast Retrofit Installation



Notes

- Bypassing/removing the magnetic ballast and capacitor will increase energy savings and assist with power factor.
- Starter **MUST** be changed to LED fuse starter.

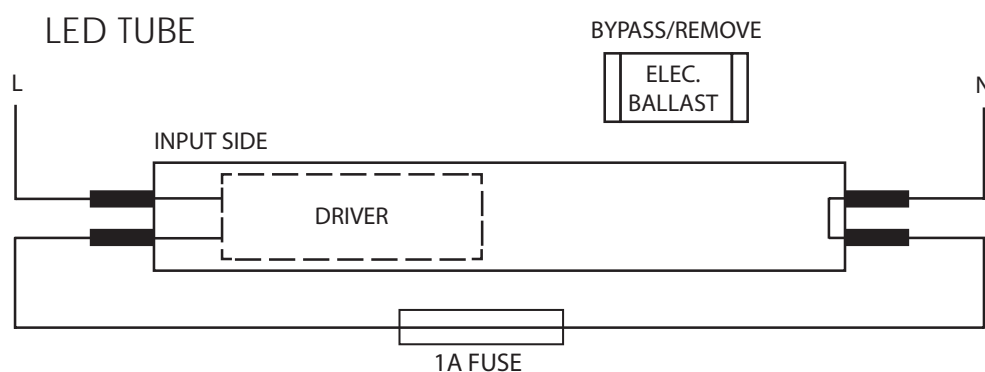Installation Method 3 - Electronic Ballast Retrofit Installation



Notes

- The electronic ballast **MUST** be removed or bypassed.
- FOR SAFETY REASONS: You **MUST** add 1A Fuse as per the diagram.

Glossary

Color Rendering

A general expression for the effect of a light source on the color appearance of objects.

Color Rendering Index (CRI)

A measure of the degree of color shift objects undergo when illuminated by the light source as compared with those same objects when illuminated by a reference source of comparable color temperature. The reference source has a CRI of 100.

Correlated Color Temperature (CCT)

The absolute temperature of a blackbody whose chromaticity most nearly resembles that of the light source. Usually specified in Kelvin (K). The lower the Kelvin temperature, the warmer the light feels, or appears.

Diffuser

An object with irregularities on a surface causing scattered reflections.

Digital Addressable Lighting Interface (DALI)

A digital communications protocol for controlling and dimming lighting fixtures, originally developed in Europe.

Driver

An electronic circuit that converts input power into a current source — a source in which current remains constant despite fluctuations in voltage. An LED driver protects LEDs from normal voltage fluctuations, overvoltages, and voltage spikes.

Efficacy

The light output of a light source divided by the total electrical power input to that source, expressed in lumens per watt (lm/W).

Halogen Lamp

A type of incandescent lamp that has a small amount of a halogen such as iodine or bromine added. The addition of the halogen aims to increase the lifespan and clarity of the tungsten filament creating the light.

Heat Sink

A part of the thermal system that conducts or convects heat away from sensitive components, such as LEDs and electronics.

High Intensity Discharge (HID) Lamps

A type of electrical gas-discharge lamp which products light by means of electric arc in a tube filled with gas & metal salts. Types of HID lamps include high-pressure sodium (HPS), mercury-vapour, metal halide, ceramic metal-halide & xenon short arc.

Illuminance

The intensity of light falling on a surface area. If measured in square meters, the unit of illuminance is lux (lx).

Incandescent Lamp

A type of lamp that produces light by heating a filament wire to a hot temperature by passing an electric current through it.

Kelvin Temperature

Term and symbol (K) used to indicate the comparative color appearance of a light source when compared to a theoretical blackbody. Yellowish incandescent lamps are 3000K. Fluorescent light sources range from 3000K to 7500K and higher.

Light Emitting Diode (LED)

A Light Emitting Diode (LED) is a solid-state semiconductor device that converts electrical energy directly into light.

Lumen

The SI unit of luminous flux, equal to the amount of light emitted per second in a unit solid angle of one steradian from a uniform source of one candela.

Lumen Depreciation

Describes the percentage of light lost relative to the initial lumen output.

Luminous Flux

Luminous flux is the measure of the perceived power of light, adjusted to reflect the varying sensitivity of the human eye to different wavelengths of light

Lux (lx)

The SI unit of illuminance, or luminous flux incident on a unit area, frequently defined as one lumen per square meter (lm/m²).

Power Factor

The active power divided by the apparent power (i.e., product of the rms input voltage and rms input current of a driver).

Thermal Resistance (K/W)

The property of a material's ability to conduct heat.

Unified Glare Rating (UGR)

The number defining glare using luminance of a lamp divided by the background visible luminance of a room. Ranging from 5 to 40, lower numbers mean less glare.

Watt (W)

The unit of electrical power as used by an electrical device during its operation. Many lamps come with rating in watts to indicate their power consumption.



Join us in bringing energy efficiency to the world.

By becoming an ENSA practical energy efficiency solutions authorised reseller. If you are interested in distributing ENSA LED lighting and energy saving devices, visit www.ensalife.com for more information.

ENSATM

Energy Saving Devices

Contact your local ENSA energy efficiency professional:



Achieve more with less.

www.ensalife.com