



Remote view from anywhere.

SLR-A Series: Solar CCTV surveillance with WiFi & 4G remote view options

Deliver surveillance to any location with the SLR-A Series Solar CCTV Surveillance Systems from VIP Vision. These remote-view-enabled, standalone surveillance solutions are perfect in areas without network/power infrastructure. This may include black spot monitoring, on farms, or in temporary CCTV applications such as construction sites or events.

- Standalone powered and networked IP surveillance
- Efficient 75W monocrystalline silicon solar panel
- 4G or long range WiFi integration for remote view
- Lasts up to 2 days from full charge in cloudy conditions
- 41.6Ah lithium iron phosphate battery (LiFePo 4)
- Built-in 40W microwave motion sensor LED area light with 10m detection range at 8m height (65° angle)
- Ø50~60mm pole mount diameter (pole not included)



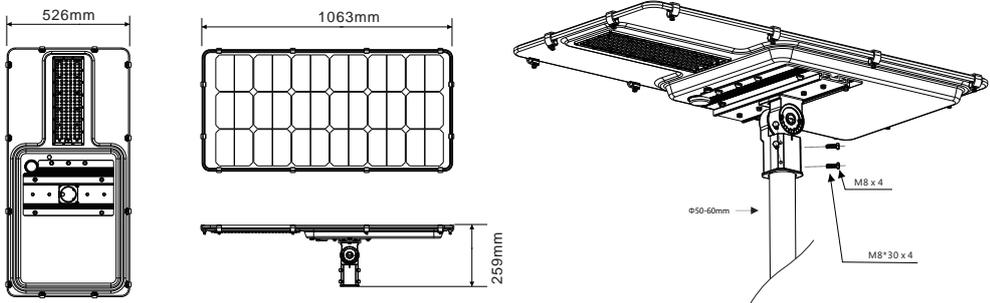
Solar Powered IP Surveillance



WiFi or 4G Remote View Options



Microwave Motion Area Light

Series	SLR-A Series Solar CCTV Surveillance																													
Solar Panel		<table border="1"> <tr><td>Panel Type</td><td>75W monocrystalline silicon panel</td></tr> <tr><td>Conversion Rate</td><td>19.6%</td></tr> <tr><td>Battery</td><td>41.6Ah Lithium Iron Phosphate (LiFiPo 4) with Low Voltage Cutoff</td></tr> <tr><td>Area Light</td><td>40W LED</td></tr> <tr><td>Light Output</td><td>6947lm (160lm/W)</td></tr> <tr><td>Beam Angle</td><td>150° x 70° (batwing distribution)</td></tr> <tr><td>Motion Detection</td><td>Microwave (65°, 10m range @ 8m install height)</td></tr> <tr><td>Panel Tilt Adjust</td><td>-60° ~ 60°</td></tr> <tr><td>Ingress Protection</td><td>IP66</td></tr> <tr><td>Wind Resistance</td><td>Up to 65m/s</td></tr> <tr><td>Dimensions</td><td>1063 x 259 x 526mm</td></tr> <tr><td>Pole Diameter</td><td>Ø60mm</td></tr> </table>	Panel Type	75W monocrystalline silicon panel	Conversion Rate	19.6%	Battery	41.6Ah Lithium Iron Phosphate (LiFiPo 4) with Low Voltage Cutoff	Area Light	40W LED	Light Output	6947lm (160lm/W)	Beam Angle	150° x 70° (batwing distribution)	Motion Detection	Microwave (65°, 10m range @ 8m install height)	Panel Tilt Adjust	-60° ~ 60°	Ingress Protection	IP66	Wind Resistance	Up to 65m/s	Dimensions	1063 x 259 x 526mm	Pole Diameter	Ø60mm				
Panel Type	75W monocrystalline silicon panel																													
Conversion Rate	19.6%																													
Battery	41.6Ah Lithium Iron Phosphate (LiFiPo 4) with Low Voltage Cutoff																													
Area Light	40W LED																													
Light Output	6947lm (160lm/W)																													
Beam Angle	150° x 70° (batwing distribution)																													
Motion Detection	Microwave (65°, 10m range @ 8m install height)																													
Panel Tilt Adjust	-60° ~ 60°																													
Ingress Protection	IP66																													
Wind Resistance	Up to 65m/s																													
Dimensions	1063 x 259 x 526mm																													
Pole Diameter	Ø60mm																													
Surveillance Camera		<table border="1"> <tr><td>Camera Type</td><td>4.0MP 4x Optical Zoom Mini PTZ Dome</td></tr> <tr><td>Image Sensor</td><td>1/3" 4.0MP Progressive Scan CMOS</td></tr> <tr><td>Min. Illumination</td><td>0.05 Lux/F1.6 (Color), 0.005 Lux/F1.6 (B/W)</td></tr> <tr><td>Lens</td><td>2.7 ~ 11mm F1.6 ~ F2.8 Motorised Lens</td></tr> <tr><td>Field of View</td><td>Horizontal: 112.5° ~ 30° (4x Optical Zoom)</td></tr> <tr><td>Lighting Compensation</td><td>BLC / HLC / WDR (120dB)</td></tr> <tr><td>Max. Record Resolution</td><td>4.0MP (2592 x 1520) up to 25fps</td></tr> <tr><td>Video Compression</td><td>H.265/H.264: 448 ~ 8192Kbps</td></tr> <tr><td>Pan / Tilt Range</td><td>Pan: 0° ~ 355° / Tilt: 0° ~ 90° / Auto-flip 180°</td></tr> <tr><td>Pan / Tilt Speed</td><td>Preset: Pan: 100°/s; Tilt: 60°/s Manual: Pan: 100°/s; Tilt: 60°/s</td></tr> <tr><td>Ingress Protection</td><td>IP66</td></tr> <tr><td>Vandal Resistance</td><td>IK10</td></tr> <tr><td>Construction</td><td>Metal with polycarbonate dome</td></tr> <tr><td>Dimensions</td><td>Ø122mm x 89mm</td></tr> </table>	Camera Type	4.0MP 4x Optical Zoom Mini PTZ Dome	Image Sensor	1/3" 4.0MP Progressive Scan CMOS	Min. Illumination	0.05 Lux/F1.6 (Color), 0.005 Lux/F1.6 (B/W)	Lens	2.7 ~ 11mm F1.6 ~ F2.8 Motorised Lens	Field of View	Horizontal: 112.5° ~ 30° (4x Optical Zoom)	Lighting Compensation	BLC / HLC / WDR (120dB)	Max. Record Resolution	4.0MP (2592 x 1520) up to 25fps	Video Compression	H.265/H.264: 448 ~ 8192Kbps	Pan / Tilt Range	Pan: 0° ~ 355° / Tilt: 0° ~ 90° / Auto-flip 180°	Pan / Tilt Speed	Preset: Pan: 100°/s; Tilt: 60°/s Manual: Pan: 100°/s; Tilt: 60°/s	Ingress Protection	IP66	Vandal Resistance	IK10	Construction	Metal with polycarbonate dome	Dimensions	Ø122mm x 89mm
Camera Type	4.0MP 4x Optical Zoom Mini PTZ Dome																													
Image Sensor	1/3" 4.0MP Progressive Scan CMOS																													
Min. Illumination	0.05 Lux/F1.6 (Color), 0.005 Lux/F1.6 (B/W)																													
Lens	2.7 ~ 11mm F1.6 ~ F2.8 Motorised Lens																													
Field of View	Horizontal: 112.5° ~ 30° (4x Optical Zoom)																													
Lighting Compensation	BLC / HLC / WDR (120dB)																													
Max. Record Resolution	4.0MP (2592 x 1520) up to 25fps																													
Video Compression	H.265/H.264: 448 ~ 8192Kbps																													
Pan / Tilt Range	Pan: 0° ~ 355° / Tilt: 0° ~ 90° / Auto-flip 180°																													
Pan / Tilt Speed	Preset: Pan: 100°/s; Tilt: 60°/s Manual: Pan: 100°/s; Tilt: 60°/s																													
Ingress Protection	IP66																													
Vandal Resistance	IK10																													
Construction	Metal with polycarbonate dome																													
Dimensions	Ø122mm x 89mm																													
WiFi Option	 2 x 5.8GHz 120° Wireless Antennas Configured as network bridge	<div style="display: flex; justify-content: space-between;"> <div data-bbox="767 896 970 1209"> <p>4G Option</p> </div> <div data-bbox="970 896 1479 1209">  1 x High Speed 3G/4G LTE Modem Router 4G: FDD 700/900/1800/2100/2600; TDD 2300Mhz </div> </div>																												
Accessories	 <div style="display: flex; justify-content: space-between;"> <div data-bbox="268 1413 767 1464"> <p>Included: Camera adapter, right angle bracket, mounting box, pole mount bracket and 128GB microSD</p> </div> <div data-bbox="767 1413 1479 1464"> <p>Optional: 3G/4G modem external antenna</p> </div> </div>																													
Diagrams																														

Your local VIP Vision™ IP solutions professional: