



Superb image performance.

Professional Series: Motorised lens HDCVI bullets in 2.0MP, 5.0MP & 8.0MP

With superior 80m infrared illumination, 4K resolution and ultra low light colour, the G-Body series from Securview captures clear footage at all hours, featuring a motorised varifocal lens for easy remote image adjustment.

- Stream up to UHD/4K/8.0MP (3840 x 2160) at 15fps
- Motorised varifocal lens with fixed iris
- Large 1/2" sensor for excellent low light performance
- Smart infrared illumination, up to 80m range
- HDCVI / AHD / TVI / Analog switchable (DIP switch)
- Up to 700m video transmission over coaxial cable
- True WDR (120dB) and 2D/3D noise reduction
- IP67 rated weather resistant metal housing



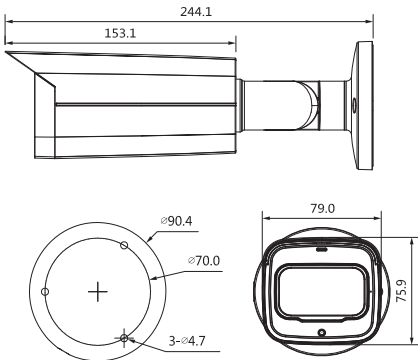
Ultra HD Recording Over Coax



DVR Cross Compatibility



Superb Low Light Performance

Model		VSCVI2MPFBIRMV4	VSCVI-5BIRMG	VSCVI-8BIRMG
Camera	Image Sensor	1/2.8" 2.0 Megapixel CMOS	1/2.8" 5.0 Megapixel CMOS	1/2" 8.0 Megapixel CMOS
	Effective Pixels	1920 (H) x 1080 (V)	2592 (H) x 1944 (V)	3840 (H) x 2160 (V)
	Signal Noise Ratio	> 65dB		
	Lens	2.7mm ~ 13.5mm F1.6 Motorised Lens, fixed iris	2.7mm ~ 13.5mm F1.3 Motorised Lens, fixed iris	3.7mm ~ 11mm F1.5 Motorised Lens, fixed iris
	Angle of View	109° (wide) ~ 29° (tele)	102° (wide) ~ 29° (tele)	112° (wide) ~ 46° (tele)
	Focus	Fixed / 0.2m Min. Focus Distance	Fixed / 0.2m Min. Focus Distance	Fixed / 1.8m Min. Focus Distance
	Minimum Illumination	0.004 Lux at F1.6 (Colour) / 0 Lux IR Active	0.005 Lux at F1.3 (Colour) / 0 Lux IR Active	0.005 Lux at F1.5 (Colour) / 0 Lux IR Active
	Electronic Shutter	1/4 ~ 1/100,000s		
	Day/Night	Auto (ICR) / Colour / B&W		
	Infrared Range	80m		
Video	White Balance	Auto / Manual		
	Noise Reduction	2D / 3D		
	Gain Control	Auto		
	Lighting Compensation	BLC / HLC / WDR (120dB)		
DORI	Resolution	1080p (1920 x 1080) to CIF (352 x 288)	5.0MP (2592 x 1944) to CIF (352 x 288)	8.0MP (3840 x 2160) to CIF (352 x 288)
	Frame Rate	25fps (1080p and lower)	20fps (5.0MP) / 25fps (4.0MP and lower)	15fps (8.0MP) / 20fps (6.0MP) / 25fps (4.0MP and lower)
	Transmission Distance	Rated for up to 700m via 75-3 coaxial cable (performed in ideal test conditions)		
	DORI Distance	44m (wide) / 153m (tele)	64m (wide) / 222m (tele)	83m (wide) / 190m (tele)
Interface	Detect	18m (wide) / 61m (tele)	26m (wide) / 89m (tele)	33m (wide) / 76m (tele)
	Observe	9m (wide) / 31m (tele)	13m (wide) / 44m (tele)	17m (wide) / 38m (tele)
	Recognise	4m (wide) / 15m (tele)	6m (wide) / 22m (tele)	8m (wide) / 19m (tele)
	Identify			
Environmental	Audio Input	Built-in Microphone / 1 Input		
	Alarm Interface	N/A		
	Video Output	1 x HDCVI / AHD / TVI / Composite Video Output (DIP switch)		
	Synchronisation	Internal		
Accessories	OSD Menu	Support		
	Ingress Protection	IP67		
	Vandal Resistant	N/A		
	Housing	Aluminium		
Diagram	Power Input	12VDC / 24VAC	12VDC / 24VAC	12VDC
	Power Consumption	< 11.1W	< 17.2W	< 12.5W
	Dimensions	244 x 90 x 90mm		
	Weight	0.81kg	0.81kg	0.76kg
Models	Operating Environment	-30° to 60°C / RH90% (max)		
	Diagram			
	Accessories			
	Refer to bracket compatibility guide for complete list			

Your local Securview™ HDCVI solutions professional: