

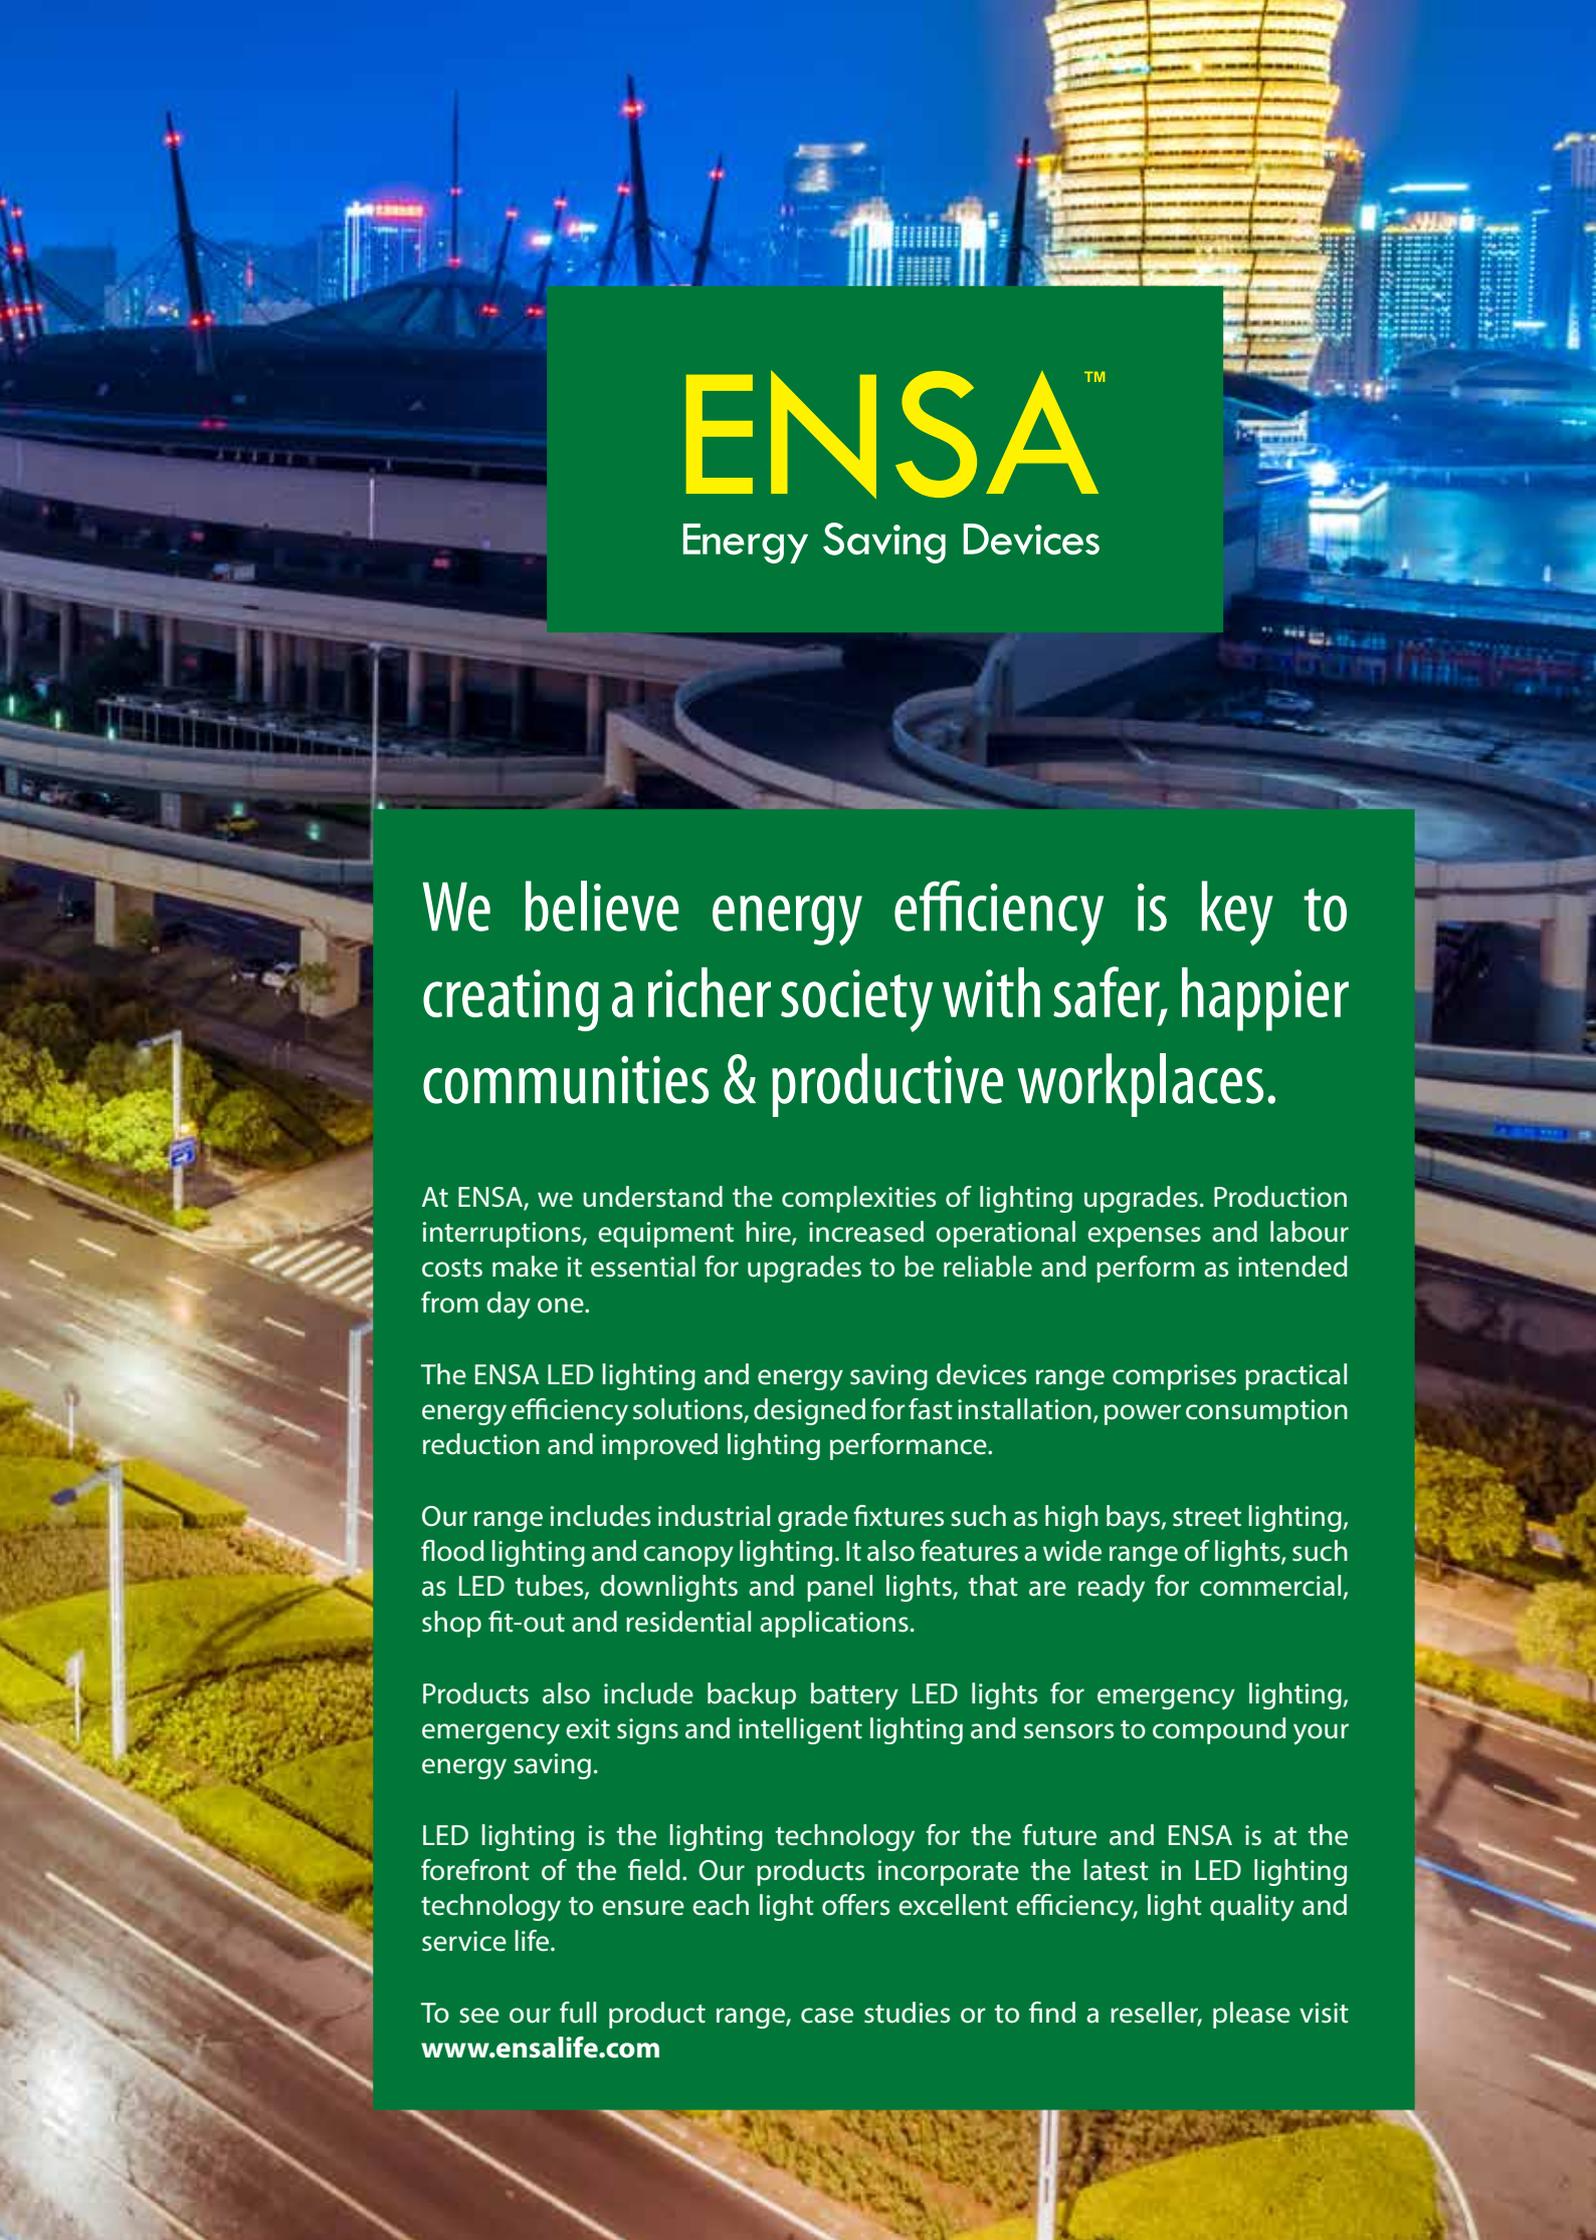
ENSATM

Energy Saving Devices

Achieve more using less.

ENSATM practical energy efficiency solutions for a brighter future.





ENSATM

Energy Saving Devices

We believe energy efficiency is key to creating a richer society with safer, happier communities & productive workplaces.

At ENSA, we understand the complexities of lighting upgrades. Production interruptions, equipment hire, increased operational expenses and labour costs make it essential for upgrades to be reliable and perform as intended from day one.

The ENSA LED lighting and energy saving devices range comprises practical energy efficiency solutions, designed for fast installation, power consumption reduction and improved lighting performance.

Our range includes industrial grade fixtures such as high bays, street lighting, flood lighting and canopy lighting. It also features a wide range of lights, such as LED tubes, downlights and panel lights, that are ready for commercial, shop fit-out and residential applications.

Products also include backup battery LED lights for emergency lighting, emergency exit signs and intelligent lighting and sensors to compound your energy saving.

LED lighting is the lighting technology for the future and ENSA is at the forefront of the field. Our products incorporate the latest in LED lighting technology to ensure each light offers excellent efficiency, light quality and service life.

To see our full product range, case studies or to find a reseller, please visit www.ensalife.com



ENSA™ Product Solutions Guide



6

High Bay Lighting

Professional high bay lighting ideal for industry, warehousing and more.



10

Flood Lighting

High power residential, commercial and industrial grade LED flood lighting.



22

Street Lighting

Modular and solar LED street lighting for roads, walkways, public and remote areas.



28

Canopy Lighting

Low bay LED lighting for petrol stations, car parks, industrial lighting & more.



30

Panel Lighting

Minimalist fluorescent troffer replacements for use in the office or workplace.



32

Intelligent Lighting

Smart sensor-equipped oyster & batten lights with battery backup for emergency.



38

Tube & Link Lighting

Energy efficient LED tubes with option for microwave sensor models.



44

Downlighting

Comprehensive downlight selection in premium and standard series.



62

Retrofit Lighting

Wide range of energy efficient easy replacement LED bulbs and globes.



70

Energy Saving Switches

Motion sensor switches with microwave & PIR motion detection & dusk/dawn switches.



72

Transmitters/Receivers

Mains voltage transmitter/receiver devices and light activation via external sensors.



Commercial LED High Bay Lighting

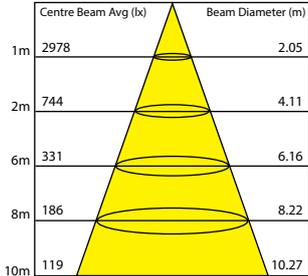
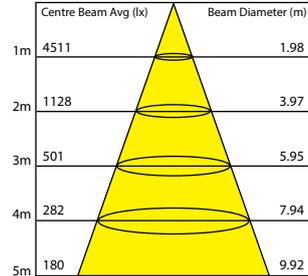
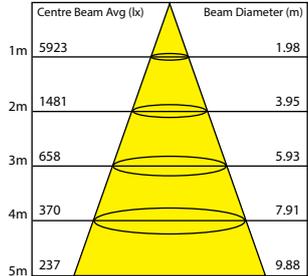
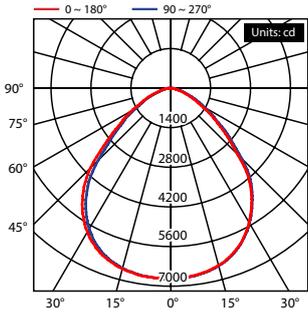
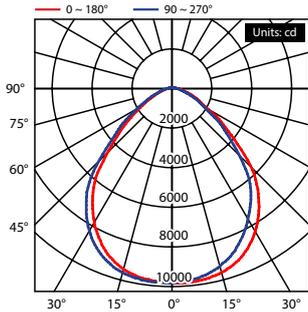
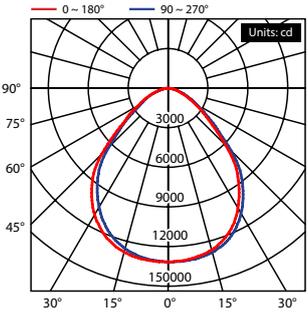
LHB-D Series: Commercial chain mount high bay lighting in 100W, 150W and 200W models

The ENSA™ LHB-D high bay series delivers energy efficient lighting to industrial and commercial environments at an economic price point. They are also weather-resistant, making them ideal for outdoors installations and events.

The LHB-D series delivers ideal lighting conditions in areas with high ceilings up to 12m, such as warehouses, manufacturing facilities and exhibition halls, with a high luminous efficacy for optimal power consumption. Each light has a compact, robust aluminium body and comes in 5700K cool white colour temperature.

- 100W, 150W and 200W industry-ready LED high bay light
- High 130lm/W luminous efficacy for energy efficiency
- Includes G1/2" thread hook for chain mount & safety cable
- 180° U-bracket and G1/2" pole mount (optional)
- Compact and robust: no additional reflector required
- Efficient heatsink cooling technology, IP66 weather rated
- Available in 5700K cool white colour temperature
- Available in 60°, 90° and 120° beam angles

Series Specifications

Model	LHB-D100	LHB-D150	LHB-D200																																				
Product Image																																							
Series Name	LHB-D Series: Commercial LED High Bay Series																																						
Optical																																							
Light Output	13000lm	19500lm	26000lm																																				
Luminous Efficacy	130lm/W																																						
Colour Temperature	5700K																																						
Colour Rendering Index	>80																																						
Beam Angle	90° (standard) / 120°	90° (standard) / 120°	60° / 90° (standard) / 120°																																				
Rated Lifespan	50,000 hours																																						
Electrical																																							
Power Consumption	100W	150W	200W																																				
Input Voltage	100~277VAC																																						
Power Factor	> 0.93																																						
Dimmable	N/A																																						
General																																							
Ingress Protection	IP66																																						
Plug / Socket / Base	3-pin AC plug																																						
Reflector / Diffuser	Aluminium / Polycarbonate																																						
Housing Adjustments	G1/2" thread																																						
Operating Environment	-20 ~ 40°C																																						
Dimensions	Ø330 x 155mm	Ø330 x 155mm	Ø390 x 155mm																																				
Photometry																																							
Illuminance at a Distance	 <table border="1"> <thead> <tr> <th>Centre Beam Avg (lx)</th> <th>Beam Diameter (m)</th> </tr> </thead> <tbody> <tr><td>2978</td><td>2.05</td></tr> <tr><td>744</td><td>4.11</td></tr> <tr><td>331</td><td>6.16</td></tr> <tr><td>186</td><td>8.22</td></tr> <tr><td>119</td><td>10.27</td></tr> </tbody> </table>	Centre Beam Avg (lx)	Beam Diameter (m)	2978	2.05	744	4.11	331	6.16	186	8.22	119	10.27	 <table border="1"> <thead> <tr> <th>Centre Beam Avg (lx)</th> <th>Beam Diameter (m)</th> </tr> </thead> <tbody> <tr><td>4511</td><td>1.98</td></tr> <tr><td>1128</td><td>3.97</td></tr> <tr><td>501</td><td>5.95</td></tr> <tr><td>282</td><td>7.94</td></tr> <tr><td>180</td><td>9.92</td></tr> </tbody> </table>	Centre Beam Avg (lx)	Beam Diameter (m)	4511	1.98	1128	3.97	501	5.95	282	7.94	180	9.92	 <table border="1"> <thead> <tr> <th>Centre Beam Avg (lx)</th> <th>Beam Diameter (m)</th> </tr> </thead> <tbody> <tr><td>5923</td><td>1.98</td></tr> <tr><td>1481</td><td>3.95</td></tr> <tr><td>658</td><td>5.93</td></tr> <tr><td>370</td><td>7.91</td></tr> <tr><td>237</td><td>9.88</td></tr> </tbody> </table>	Centre Beam Avg (lx)	Beam Diameter (m)	5923	1.98	1481	3.95	658	5.93	370	7.91	237	9.88
	Centre Beam Avg (lx)	Beam Diameter (m)																																					
	2978	2.05																																					
744	4.11																																						
331	6.16																																						
186	8.22																																						
119	10.27																																						
Centre Beam Avg (lx)	Beam Diameter (m)																																						
4511	1.98																																						
1128	3.97																																						
501	5.95																																						
282	7.94																																						
180	9.92																																						
Centre Beam Avg (lx)	Beam Diameter (m)																																						
5923	1.98																																						
1481	3.95																																						
658	5.93																																						
370	7.91																																						
237	9.88																																						
Luminous Light Distribution																																							

Ordering Information

Type	Series	Wattage	Colour Temperature	Beam Angle
LHB	-	D	100 (100W)	60 (60°, 200W only)
			150 (150W)	90 (90°)
			200 (200W)	120 (120°)
LHB-D150-C90: 150W LED High Bay in Cool White (90°)				

Additional Accessories

The optional **180° U-bracket mount** and **G1/2" pole mount** open up more installation opportunities for the LHB-D series.





Food Grade LED High Bay Lighting

LHB-F Series: Professional food grade high bays in 100W, 150W and 200W models

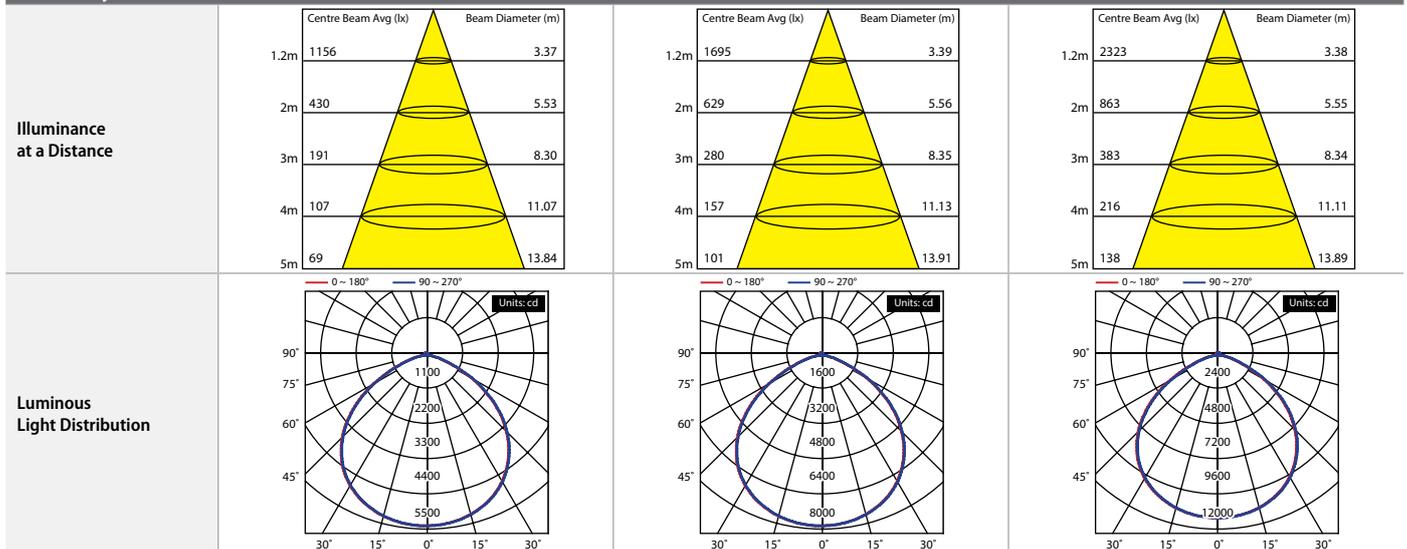
The ENSA™ LHB-F series of professional high bay lights deliver energy efficient lighting to industrial and commercial environments. These lights are purpose built for food preparation environments & are easily cleaned with an IP69K rated body.

The LHB-F series delivers superb lighting performance with high luminous efficacy of 135lm/W. Models feature a powder coated, corrosion resistant heatsink with a smooth surface that reduces build up of dust and simplifies routine cleaning. Luminaires are free of glass to ensure safe practices when installed in food preparation environments.

- Food preparation LED high bays in 100W, 150W & 200W
- In 4000K natural & 5700K cool white with 120° beam angle
- Suitable for food processing environments - no glass, smooth non-toxic surface & easy to clean
- Highly durable IP69K weather resistance - steam cleanable
- High 135lm/W luminous efficacy for energy efficiency
- Series is IPART approved for use in the NSW ESS
- Prismatic reflector available (*sold separately*)

Series Specifications

Model	LHB-F100	LHB-F150	LHB-F200
Product Image			
Series Name	LHB-F Series: Food Grade LED High Bay Series		
Optical			
Light Output	13500lm	20250lm	27000lm
Luminous Efficacy	135lm/W		
Colour Temperature	4000K / 5700K		
Colour Rendering Index	>70 / >80		
Beam Angle	120°		
Light Decay	<5% at 9,000 hours		
Rated Lifespan	54,000 hours		
Electrical			
Power Consumption	100W	150W	200W
Input Voltage	100 ~ 277VAC / 277 ~ 480VAC		
Power Factor	> 0.93		
Dimmable	N/A		
General			
Ingress Protection	IP69K		
Plug / Socket / Base	3-pin AC plug		
Reflector / Diffuser	Aluminium / Polycarbonate		
Housing Adjustments	N/A		
Operating Environment	-10 ~ 40°C		
Dimensions	Ø490 x 183mm		
Certifications	NSF, ETL, DLC, SAA, IPART, VEET		
Photometry			



Ordering Information

Type	Series	Wattage	Colour Temperature
LHB	-	F	100 (100W) 150 (150W) 200 (200W)
			N (Natural white) C (Cool white)
LHB-F200-C: 200W LED High Bay in Cool White			

Additional Accessories

The optional prismatic reflector (**LHB-FRFP2**) creates a more even distribution of light, sending light out in all directions.

Recommended for installations at lower ceiling heights.





High Power LED Flood Lighting

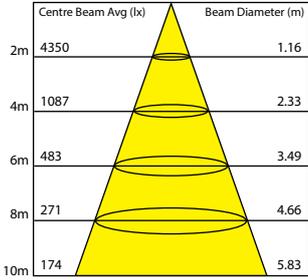
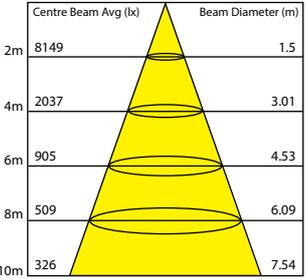
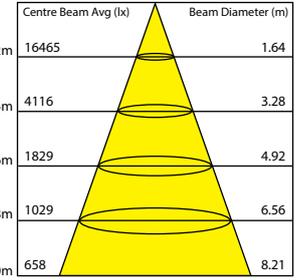
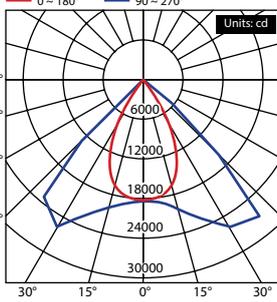
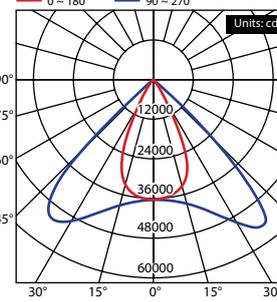
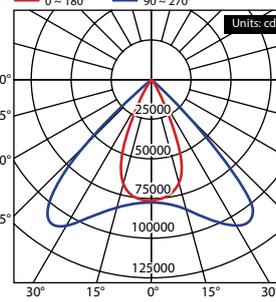
LFL-D Series: Large format flood lighting in 240W, 360W, 480W, 720W and 960W models

The ENSA™ LFL-D series of high-power LED flood lights delivers exceptional lighting performance in a robust, weather resistant package. Available in 240W, 360W, 480W, 720W, 960W models with a wide 100° beam angle.

The LFL-D series flood lights are ideal for high power lighting in commercial and industrial environments including stadiums, car parks, building sites, security lighting, signage illumination and more. Each light has a robust powder coated, IP65 rated, aluminium body and tempered glass front for superior light transmittance.

- High luminous efficacy LED flood lighting (130lm/W)
- Available in 5000K cool white colour temperature
- IP65 weather resistant, suitable for outdoor applications
- Wide 100° beam angle, ideal for general purpose lighting
- Efficient replacement for halogen and metal-halide floods
- 360° adjustable two-point fastened mounting bracket

Series Specifications

Model	LFL-D240	LFL-D360	LFL-D480	LFL-D720	LFL-D960
Product Image					
Series Name	LFL-D Series Commercial High Power LED Flood Lights				
Optical					
Luminous Flux	31200lm	46800lm	62400lm	93600lm	124800lm
Luminous Efficacy	130lm/W				
Colour Temperature	5000K				
Colour Rendering Index	> 80				
Beam Angle	60 x 100°				
Light Decay	<15% at 20,000 hours				
Rated Lifespan	50,000 hours				
Electrical					
Power Consumption	240W	360W	480W	720W	960W
Input Voltage	100 ~ 240VAC				
Dimmable	N/A				
General					
Ingress Protection	IP65				
Plug / Socket / Base	3-pin AC plug				
Reflector / Diffuser	Aluminium reflector / Glass LED lens front				
Housing Adjustments	180° adjustable housing				
Operating Environment	-20° ~ 50°C				
Dimensions	435 x 341 x 190mm	618 x 341 x 200mm	579 x 442 x 201mm	833 x 442 x 201mm	1090 x 442 x 201mm
Weight	11.3kg	15.0kg	19.2kg	30.0kg	36.0kg
Photometry					
Illuminance at a Distance					
	LFL-D240-C (240W)	LFL-D480-C (480W)	LFL-D960-C (960W)		
Luminous Light Distribution					
	LFL-D240-C (240W)	LFL-D480-C (480W)	LFL-D960-C (960W)		

Ordering Information

Type	Series	Wattage	Colour Temperature	Lens Options
LFL	-	240 (240W) 360 (360W) 480 (480W) 720 (720W) 960 (960W)	-	C (Cool white)
				(100°, standard) 3 (30° beam)
LFL-D960-C3: 960W LED High Power Flood Light in Cool White, 30°				



Professional High Power LED Flood Lighting

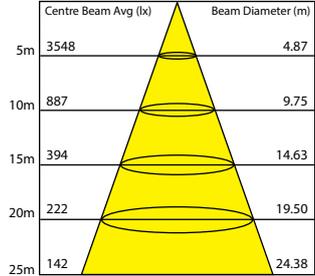
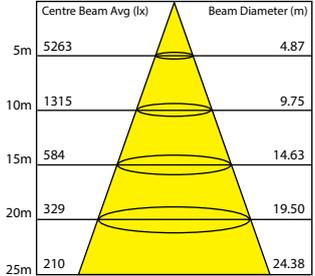
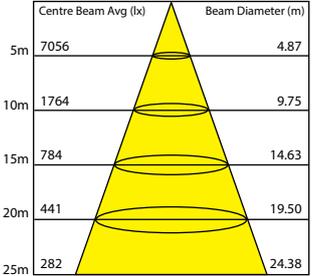
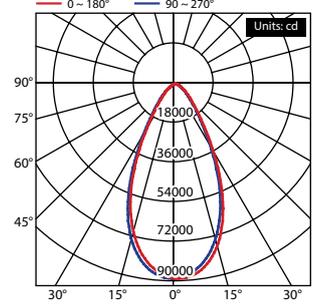
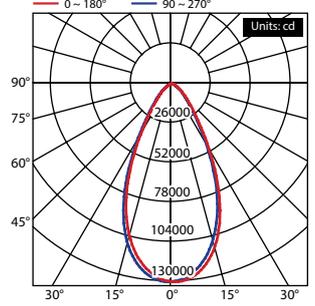
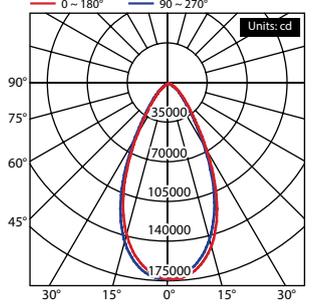
LFL-F Series: Adjustable flood lighting in 480W, 720W, 960W, 1200W & 1440W models

Combining innovative lighting design and leading energy efficiency, ENSA™ LFL-F Series LED flood lights deliver large scale lighting solutions without compromise. Lights feature precision adjustment controls with modular LED units that rotate and tilt to enable precision light aiming and smooth installation.

LFL-F Series lighting solutions also sport 165lm/W, low lumen-depreciation LEDs to increase lifespan and reduce required maintenance. They have been installed in sports lighting applications and in large outdoor production and carpark facilities.

- Best in performance LED lighting efficiency at 165lm/W
- Unique rotate & tilt modules for precision adjustment
- 360° LED module rotation and 140° tilt adjustment
- Reinforced mounting bracket with multiple mount points
- High performance, long lifespan Lumileds LED package
- High quality Meanwell driver, DALI dimmable optional
- Available in a variety of beam angles as per application
- IP66 weather rated, powder-coated aluminium chassis

Series Specifications

Model	LFL-F480	LFL-F720	LFL-F960	LFL-F1200	LFL-F1440	
Product Image						
Series Name	LFL-F Series LED Flood Light					
Optical						
Luminous Flux	79,200lm	118,800lm	158,400lm	190,000lm	237,600lm	
Luminous Efficacy	165lm/W					
LED Package	Lumileds (62pcs/module)					
LED Testing	LM80 / TM21 (available on request)					
Colour Temperature	6500K cool white					
Colour Rendering Index	> 70					
Beam Angle Options	60° (standard) / 30°, 90°, 120° (optional)					
Rated LED Lifespan	50,000 hours					
Electrical						
Power Consumption	480W	720W	960W	1200W	1440W	
Input Voltage	90 ~ 305VAC, 50/60Hz					
Power Factor	> 0.95					
Dimming Technology	DALI (optional)					
General						
Ingress Protection	IP66					
Driver Package	Meanwell LED driver, 3-pin AC plug					
Reflector / Diffuser	Aluminium heatsink, Polycarbonate lens					
Housing Adjustments	360° rotate & 140° tilt (modules)					
Operating Environment	-40° ~ 60°C					
Dimensions	536 x 165 x 579mm	691 x 202 x 579mm	846 x 202 x 579mm	1001 x 277 x 579mm	1156 x 277 x 579mm	
Net Weight	12.0kg	15.8kg	19.9kg	24.2kg	26.5kg	
Effective Projected Area	0.20m ²	0.35m ²	0.44m ²	0.58m ²	0.64m ²	
Windage (Class 15, 42~51m/s)	Load	34.0kg	43.5kg	53.0kg	63.0kg	72.3kg
	Pole Bearing	46.0kg	59.3kg	72.9kg	87.2kg	98.8kg
Photometry						
Illuminance at a Distance						
	LFL-F480-C (480W, 60°)	LFL-F720-C (720W, 60°)	LFL-F960-C (960W, 60°)			
Luminous Light Distribution						
	LFL-F480-C (480W, 60°)	LFL-F720-C (720W, 60°)	LFL-F960-C (960W, 60°)			

Ordering Information

Type	Series	Wattage	Colour Temperature	Beam Angle
LFL	-	480 (480W) 720 (720W) 960 (960W)	-	(60° standard) 30D (30°) 90D (90°) 120D (120°)
	F		C (Cool white)	



Professional High Power LED Flood Lighting

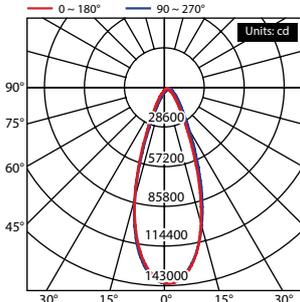
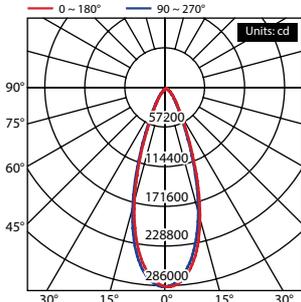
LFL-G Series: Modular flood lighting with U-shape bracket in 240W & 480W

Highly modular, the ENSA™ LFL-G Series of LED flood lights is a flexible choice large scale lighting solutions. Each light module can be individually adjustment adjusted with precision, easily rotating and tilting for a smooth installation process.

LFL-G Series flood lights are incredibly reliable with a rated lifespan up to 100,000 hours, and have versatile dimming options with both DALI and DMX control standards. These lights are ideal in sports lighting applications and in large outdoor production and carpark facilities.

- High performance 160lm/W LED lighting efficiency
- Unique rotate & tilt modules for precision adjustment
- 90° LED module tilt and 180° adjustable U-bracket
- Independently adjustable and detachable light modules
- High performance, long lifespan 5050 SMD LED package
- Optional dimming controlled via DALI & DMX standards
- Independent power box with efficient heat dissipation
- IP67 weather rated and IK10 vandal resistance

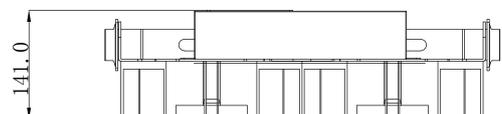
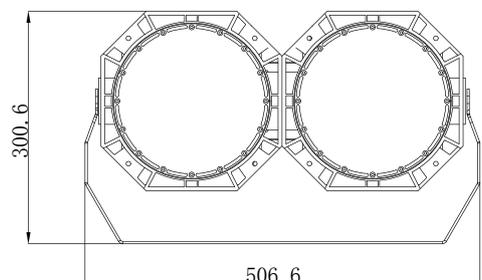
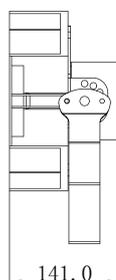
Series Specifications

Model	LFL-G240	LFL-G480
Product Image		
Series Name	LFL-G Series LED Flood Lights	
Optical		
Luminous Flux	38,400lm	81,600lm
Luminous Efficacy	160lm/W	172lm/W
LED Package	5050 SMD LEDs (120pcs/module)	
Colour Temperature	5000K cool white	
Colour Rendering Index	> 80	
Beam Angle	30°	
Rated LED Lifespan	100,000 hours	
Electrical		
Power Consumption	240W	480W
Input Voltage	100~277/347/480VAC	
Power Factor	> 0.95	
Dimming Technology	DALI / DMX (optional)	
General		
Ingress Protection	IP67	
Driver Package	Meanwell LED driver, 3-pin AC plug	
Reflector / Diffuser	Polycarbonate lens	
Housing Adjustments	90° tilt (modules)	
Operating Environment	-20° ~ 55°C	
Dimensions	460 x 230 x 75mm	460 x 460 x 75mm
Net Weight	12.5kg	18kg
Photometry		
Luminous Light Distribution		

Ordering Information

Type	Series	Wattage	Colour Temperature
LFL	- G	240 (240W) 480 (480W)	- C (Cool white)
LFL-G240-C: 240W LED Flood Light in Cool White			

Diagram



ESS



Professional LED Flood Lighting

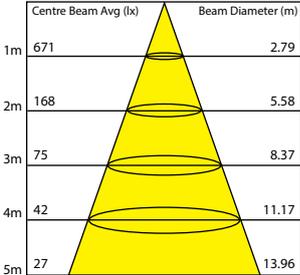
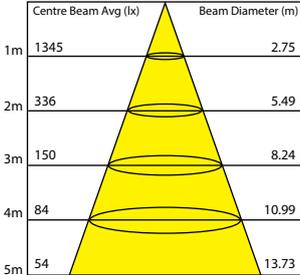
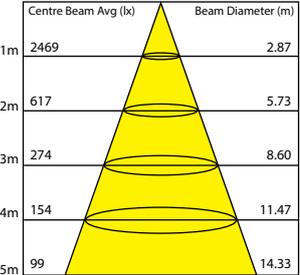
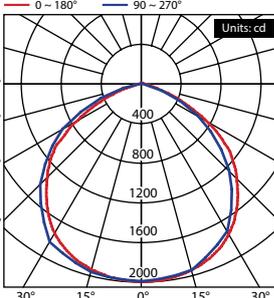
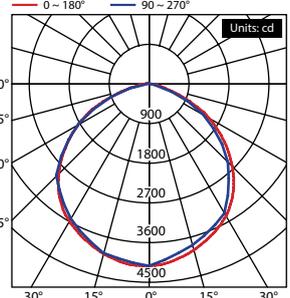
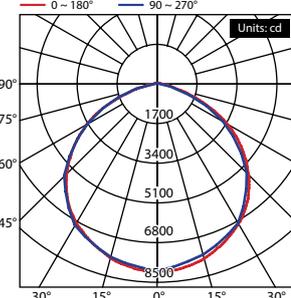
LFL-B Series: High performance floods in 20W, 30W, 50W, 70W, 100W, 150W and 200W models

The ENSA™ LFL-B series of high-power LED flood lights delivers exceptional lighting performance in a robust, weather resistant package. Available in 20W, 30W, 50W, 70W, 100W, 150W and 200W models with a wide 100° beam angle.

Ideal for general purpose lighting in commercial and industrial environments including parking lots, building sites, security lighting, sporting fields, signage and more. LFL-B series floods feature a slim, lightweight design with a U-shape adjustable bracket, making them easy to mount. Each light sports a powder coated, IP65 rated, aluminium body and heatsink for excellent thermal conductivity; a tempered glass front for superior light transmittance; and UV resistant ASA plastic bolt caps.

- High luminous efficacy LED flood lighting (110lm/W)
- Available in 3000K warm white and 5000K cool white
- Wide 100° beam angle, ideal for general purpose lighting
- IP65 weather resistant, suitable for outdoor applications
- 180° adjustable two-point fastened mounting bracket
- Series is IPART approved for use in the NSW ESS

Series Specifications

Model	LFL-B20	LFL-B30	LFL-B50	LFL-B70	LFL-B100	LFL-B150	LFL-B200
Product Image							
Series Name	LFL-B Series Commercial LED Flood Lights						
Optical							
Luminous Flux	2200 lm	3300 lm	5500 lm	7700 lm	11000 lm	16500 lm	22000 lm
Luminous Efficacy	110lm/W						
Colour Temperature	3000K / 5000K						
Colour Rendering Index	> 80						
Beam Angle	100°						
Light Decay	<15% at 20,000 hours						
Rated Lifespan	50,000 hours						
Electrical							
Power Consumption	20W	30W	50W	70W	100W	150W	200W
Input Voltage	100 ~ 240VAC						
Dimmable	N/A						
General							
Ingress Protection	IP65						
Plug / Socket / Base	3-pin AC plug						
Reflector / Diffuser	Aluminium reflector / glass front						
Housing Adjustments	180° adjustable housing						
Operating Environment	-20° ~ 50°C						
Dimensions	216 x 152 x 40mm	226 x 167 x 40mm	310 x 220 x 50mm	355 x 245 x 55mm	402 x 295 x 60mm	430 x 330 x 60mm	470 x 360 x 60mm
Weight	0.78kg	1.10kg	1.70kg	2.75kg	3.90kg	5.10kg	6.30kg
Certifications	IPART						
Photometry							
Illuminance at a Distance	 <p>LFL-B50-C (50W, cool white)</p>	 <p>LFL-B100-C (100W, cool white)</p>	 <p>LFL-B200-C (200W, cool white)</p>				
	 <p>LFL-B50-C (50W, cool white)</p>	 <p>LFL-B100-C (100W, cool white)</p>	 <p>LFL-B200-C (200W, cool white)</p>				

Ordering Information

Type	Series	Wattage	Colour Temperature
LFL	- B	20 ~ 200 (20W ~ 200W)	C (Cool white) W (Warm white)
LFL-B150-C: 150W LED Flood Light in Cool White			



LED Sensor Flood Lighting

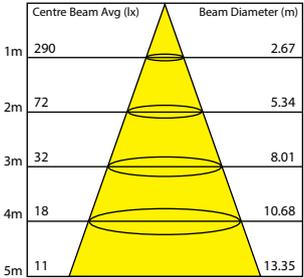
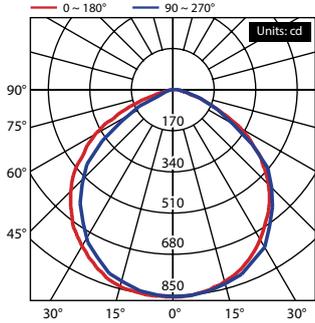
LFL-C2 Series: 20W passive infrared motion sensor LED flood light with U-shape bracket

The LFL-C Series combines efficient LED flood lighting with customisable motion-sensing technology to compound your energy savings. Available in 20W with adjustable ambient light sensitivity, on-time delay and passive infrared (PIR) motion detection to deliver energy efficient lighting and ideal for security and general purpose lighting.

The LFL-C Series is built with a metal, IP65 rated weather resistant chassis, making them suitable for outdoor lighting in residential, commercial and industrial applications.

- Available in 6000K cool white with 120lm/W light output
- Effective light distribution with 120° beam angle
- Adjustable PIR detection up to 12m with a 140° arc.
- Adjustable on-time delay (5s ~ 5min)
- Adjustable U-shape mount with over 180° of motion
- Adjustable PIR bracket (180° panning with 90°~90° tilt)

Series Specifications

Model	LFL-C20-CS2	LFL-C30-CS2	LFL-C50-CS2																		
Product Image																					
Series Name	LFL-C Series LED Sensor Flood Lights																				
Optical																					
Light Output	2400lm	3600lm	6000lm																		
Luminous Efficacy	120lm/W																				
Colour Temperature	6000K																				
Colour Rendering Index	>80																				
Beam Angle	120°																				
Light Decay	<30% at 35,000 hours																				
Rated Lifespan	35,000 hours																				
Electrical																					
Power Consumption	20W	30W	50W																		
Input Voltage	100 ~ 240VAC																				
Power Factor	> 0.95																				
Dimmable	N/A																				
General																					
Ambient Sensor	2~2000lx (adjustable)																				
Motion Sensor	PIR: 140° arc up to 12m range (horizontally), Ø6m range (ceiling)																				
Sensor Calibration	Adjustable motion sensitivity and on-time delay (5s ~ 5min) - <i>Sensor mode cannot be disabled</i>																				
Ingress Protection	IP65																				
Plug / Socket / Base	Bare wire, unterminated																				
Reflector / Diffuser	Aluminium reflector / Tempered glass front																				
Housing Adjustments	+180° angle adjustable U-shape bracket / Fully adjustable PIR sensor stalk Adjustable PIR sensor bracket (180° panning, 90°~90° tilt)																				
Operating Environment	-20° ~ 50°C																				
Dimensions	204 x 206 x 38mm	253 x 236 x 40mm	312 x 279 x 46mm																		
Photometry																					
Illuminance at a Distance	 <table border="1"> <thead> <tr> <th>Distance (m)</th> <th>Centre Beam Avg (lx)</th> <th>Beam Diameter (m)</th> </tr> </thead> <tbody> <tr> <td>1m</td> <td>290</td> <td>2.67</td> </tr> <tr> <td>2m</td> <td>72</td> <td>5.34</td> </tr> <tr> <td>3m</td> <td>32</td> <td>8.01</td> </tr> <tr> <td>4m</td> <td>18</td> <td>10.68</td> </tr> <tr> <td>5m</td> <td>11</td> <td>13.35</td> </tr> </tbody> </table> <p>LFL-C20-CS2 (20W)</p>			Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)	1m	290	2.67	2m	72	5.34	3m	32	8.01	4m	18	10.68	5m	11	13.35
Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)																			
1m	290	2.67																			
2m	72	5.34																			
3m	32	8.01																			
4m	18	10.68																			
5m	11	13.35																			
Luminous Light Distribution	 <p>LFL-C20-CS2 (20W)</p>																				

Ordering Information

Type	Series	Wattage	Colour Temperature	Sensor	Series		
LFL	-	C	20 (20W) 30 (30W) 50 (50W)	-	C (Cool white)	S (PIR Sensor)	2 (Series 2)
LFL-C20-CS2: 20W LED Sensor Flood Light in Cool White							



Residential LED Flood Lighting

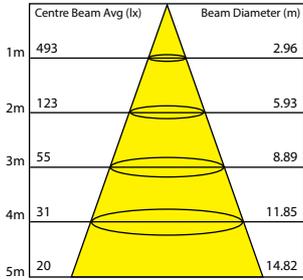
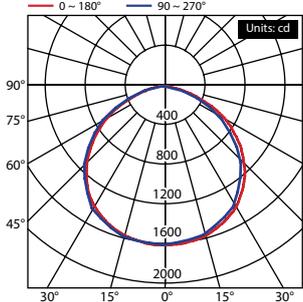
LFL-E Series: Affordable flood lighting available in 50W, in cool white colour temperature

The ENSA™ LFL-E Series LED flood lighting delivers reliable, energy efficient and cost effective flood lighting, ideal for use in residential and light commercial environments.

Available in 50W in cool white colour temperature, LFL-E Series models are best suited for general purpose lighting, in security lighting applications, for signage illumination and more. Lights feature a white plastic-coated aluminium IP65 weather rated housing, with tempered glass front and simple 180° U-bracket for easy mounting.

- High luminous efficacy LED flood lighting (90lm/W)
- Available in 5000K cool white colour temperature
- IP65 weather resistant, suitable for outdoor applications
- Wide 100° beam angle, ideal for general purpose lighting
- Efficient replacement for halogen and metal-halide floods
- 180° adjustable mounting bracket for easy installation

Series Specifications

Model	LFL-E50-C												
Product Image													
Series Name	LFL-E Series LED Flood Light												
Optical													
Luminous Flux	4500lm												
Luminous Efficacy	90lm/W												
Colour Temperature	5000K												
Colour Rendering Index	> 80												
Beam Angle	100°												
Light Decay	< 15% at 15,000 hours												
Rated Lifespan	30,000 hours												
Electrical													
Power Consumption	50W												
Input Voltage	200 ~ 240VAC												
Power Factor	> 0.9												
Dimmable	N/A												
General													
Ingress Protection	IP65												
Plug / Socket / Base	3-pin AC plug												
Reflector / Diffuser	Aluminium reflector / tempered glass front												
Housing Adjustments	180° adjustable housing												
Operating Environment	-20° ~ 50°C												
Dimensions	270 x 256 x 34mm												
Weight	1.38kg												
Photometry													
Illuminance at a Distance	<table border="1"> <thead> <tr> <th>Centre Beam Avg (lx)</th> <th>Beam Diameter (m)</th> </tr> </thead> <tbody> <tr> <td>493</td> <td>2.96</td> </tr> <tr> <td>123</td> <td>5.93</td> </tr> <tr> <td>55</td> <td>8.89</td> </tr> <tr> <td>31</td> <td>11.85</td> </tr> <tr> <td>20</td> <td>14.82</td> </tr> </tbody> </table> 	Centre Beam Avg (lx)	Beam Diameter (m)	493	2.96	123	5.93	55	8.89	31	11.85	20	14.82
Centre Beam Avg (lx)	Beam Diameter (m)												
493	2.96												
123	5.93												
55	8.89												
31	11.85												
20	14.82												
Luminous Light Distribution													

Ordering Information

Type	Series	Wattage	Colour Temperature
LFL	- E	50 (50W)	C (Cool white)
LFL-E50-C: 50W LED Flood Light in Cool White			



Professional LED Street & Area Lighting

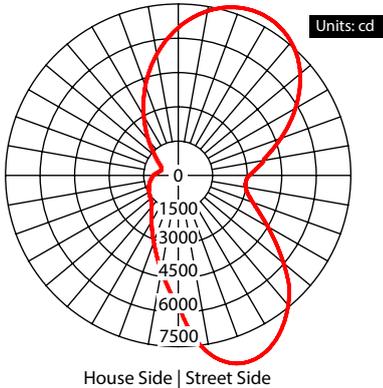
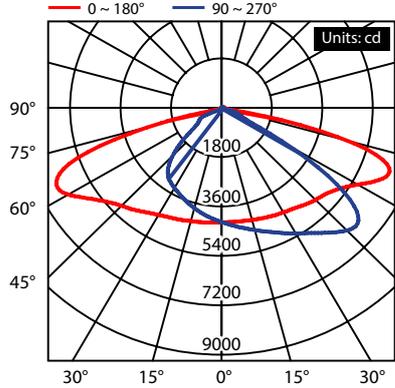





LSL-B Series: Street and area lighting available in 100W, 150W and 200W

The ENSA™ LSL-B Series comprises versatile LED lights with a variety of mounting and sensor options to deliver high performance street and area lighting. These luminaires offer impressive lighting with high energy efficiency in a robust slimline housing. LSL-B Series lights feature a wide range of mounting solutions to fit to a multitude of installation requirements. Models also feature the option for built-in dusk/dawn switching and motion detection by passive infrared or microwave sensors.

LSL-B Series lights are ideal for illumination in street lighting applications, in area lighting for public spaces and for general purpose lighting in a variety of commercial and industrial building environments.

- High luminous efficacy up to 135lm/W
- Batwing or square distribution for street & area lighting
- Long lifespan LED lighting: rated for up to 50,000 hours
- Rotate polycarb lens for easy light direction adjustment
- Includes in-line surge protection for up to 20KV
- Robust IP66/IK08 weather & vandal resistant housing
- Photocell & PIR / microwave motion sensor optional
- Versatile mounting with 5 adjustable light brackets

Series Specifications

Model	LSL-B100	LSL-B150	LSL-B200		
Product Image					
Series Name	LSL-B Series: LED Street Lights				
Optical					
Light Output	13,500lm	20,250lm	27,000lm		
Luminous Efficacy	135lm/W				
Colour Temperature	5000K				
Colour Rendering Index	70				
Beam Angle	155° x 85°				
Light Decay	23% at 50,000 hours				
Rated Lifespan	50,000 hours				
Electrical					
Power Consumption	100W	150W	200W		
Input Voltage	100 ~ 277VAC				
Power Factor	> 0.93				
Dimmable	1 ~ 10V / PWM				
General					
Ingress Protection	IP66				
Vandal Resistance	IK08				
Plug / Socket / Base	Unterminated				
Reflector / Diffuser	Clear polycarbonate Lens				
Operating Environment	-20° ~ 50°C				
Pole Diameter	Ø62.1mm (LSL-BKTS)				
Dimensions	428 x 247 x 55mm	428 x 247 x 55mm	458 x 268 x 55mm		
Photometry					
Max Intensity Distribution (150W)	 <p>Units: cd</p> <p>House Side Street Side</p>		 <p>Units: cd</p>		
Luminous Light Distribution (150W)					
Brackets					
					
	Slip Fitter Adjustable LSL-BKTS	Fixed Pole Mount LSL-BKTP	Adjustable Pole Mount LSL-BKTA	Trunnion Mount LSL-BKTT	Yoke Wall Mount LSL-BKTY

Ordering Information

Type	Series	Wattage	Colour Temperature	Sensors
LSL	- B	100 (100W) 150 (150W) 200 (200W)	C (Cool white)	S (Motion sensing) P (Photocell)
LSL-B150-CS: 150W LED Street Light in Cool White with Motion Sensing				



Motion Activated Solar LED Street Lighting

SSL-B Series: Solar LED street lighting with microwave motion detection in 30W, 50W & 60W models

The ENSA™ SSL-B Series comprises motion-activated, solar-powered LED street lights, designed to deliver standalone lighting to outdoor locations without mains power access. SSL-B Series models couple monocrystalline silicon solar panel technology and high capacity lithium iron phosphate (LiFePO4) batteries for efficient use & extended operating time.

Models feature a customisable motion detection system that can be configured for street, area & security lighting, and other off-grid outdoor lighting purposes. They are ideal for use in remote or under-developed locations such as on rural roads, at remote fences/gates, in construction sites, and in general street lighting applications.

- Outstanding energy efficiency at >180lm/W performance
- Up to 21% conversion rate monocrystalline solar panels
- Dusk/dawn switch, motion sensing & on-time delay
- Configure power output for different times of the day
- 60° tilt-adjustable LED modules for lighting customisation
- Multiple days of use from full charge (sensor mode, overcast)
- LED available in 5700K cool white colour temperature
- IP65 weather rated with included bird guard (optional)

Superb off-grid lighting

Superior lighting in challenging locations

SSL-B Series Solar LED Street Lights offer superb lighting results for an off-grid system. Models feature incredible light output and LED lifespan, making them an ideal long-term street or area lighting solution for locations without access to mains power.

- High efficiency +180lm/W LED lighting module
- 50,000hrs LED lifespan & microwave motion sensing
- Adjustable LED light module, tilt -30° ~ 30°

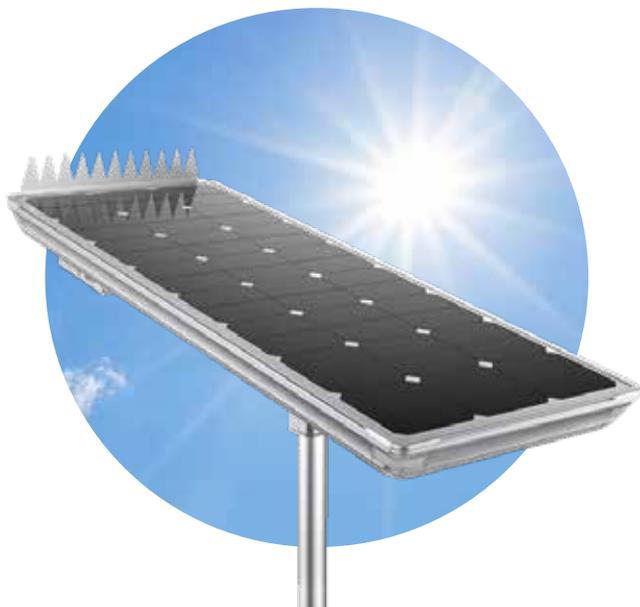


Latest solar technology

Excellent solar energy generation & storage

SSL-B Series monocrystalline solar panels are built for high performance with large panel surface area to maximise solar energy generation. Models are paired with the latest lithium battery technology for increased light uptime, even in extended periods of sub-optimal solar generation conditions.

- Monocrystalline panel for $\geq 21\%$ panel conversion
- Lithium iron phosphate batteries (LiFePO4)
- Multiple days of light uptime across the range



Optimise your solar light

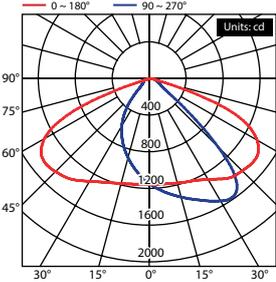
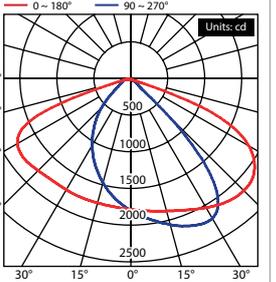
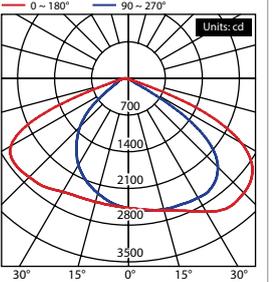
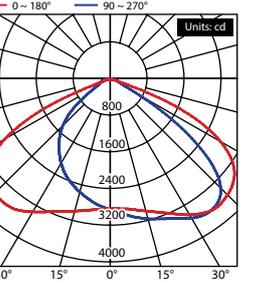
Fully configure your LED solar lighting system

Customise SSL-B Series Solar LED Street Lights to your exact specifications quickly via infrared remote control. Monitor system health, set motion detection properties and configure as per your application requirements.

- Panel & battery control and panel-driven dusk/dawn
- Configure light output for up to 5 time periods
- Setup motion detection lighting with motion sensor adjustment & dimmed light output levels
- Set custom on-time delay from 0s up to 120s



Series Specifications

Model	SSL-B20	SSL-B30	SSL-B50	SSL-B60
Product Image				
Series Name	SSL-B Series Motion Activated Solar LED Street Lights			
Light				
Light Output	3900lm	5500lm	9400lm	11100lm
Luminous Efficacy	>180lm/W			
Colour Temperature	5700K Cool White			
Beam Angle	145° x 75°		145° x 100°	
Rated LED Lifespan	50,000hrs			
LED Testing	LM80 / TM21 (available on request)			
Power Consumption	30W	30W	50W	60W
Internal Battery	218Wh LiFePO4	320Wh LiFePO4	500Wh LiFePO4	1200Wh LiFePO4
Input Voltage	12.8VDC	12.8VDC	12.8VDC	25.6VDC
Operating Time	72~120 hours (intelligent mode, rainy weather)			120~168 hours (int. mode, rainy weather)
Light Bracket	Adjustable bracket angle -30° ~ 30°			
Solar Panel				
Panel Type	Monocrystalline silicon			
Panel Wattage	56W	80W	120W	180W
Panel Conversion Rate	≥21%			
Panel Bracket	Adjustable bracket angle -60° ~ 60°			
Rec. Install Height	5 ~ 7m		8 ~ 10m	
Detection				
Motion Detection	Microwave motion sensor			
Detection Range	Ø8 ~ 15m (height: 5 ~ 7m)		Ø8 ~ 15m (height: 8 ~ 10m)	
Light Mode Settings	Normal	Mode time period / Brightness		
	Morning	Mode time period / Brightness		
	Sensor	Mode time period / Brightness on motion / On-time delay / Brightness after motion		
General				
Ingress Protection	IP65			
Pole Diameter	Ø50~60mm			
Product Dimensions	821 x 450 x 161mm	1015 x 525 x 161mm	1321 x 525 x 161mm	1496 x 685 x 161mm
Photometry				
Luminous Light Distribution				

Ordering Information

Type	Series	Wattage	Sensor Type	Colour Temperature
SSL	-	20 (20W LED light) 30 (30W LED light) 50 (50W LED light) 60 (60W LED light)	M (Microwave)	C (Cool white)
SSL-B60MC: 60W Motion Activated Solar LED Street Light in Cool White				

Included Accessories

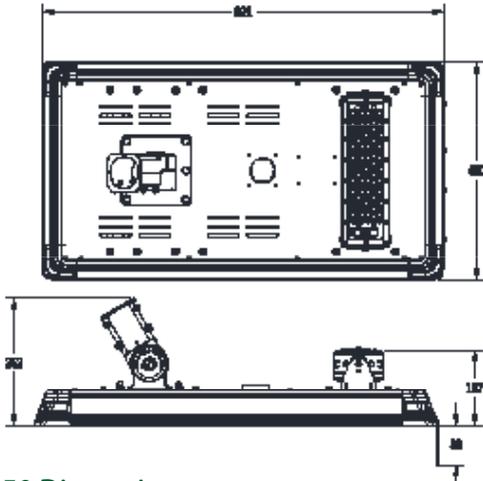
Check status and adjust settings of the SSL-B Series with the included infrared configuration remote.

Control motion sensor operation, battery charge/discharge settings, allocate light power and more.

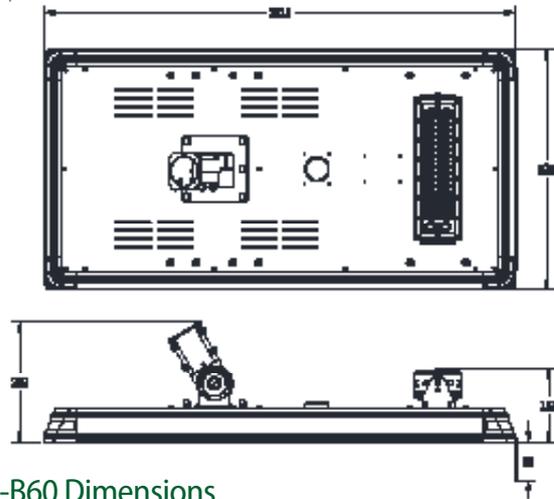


Series Diagrams

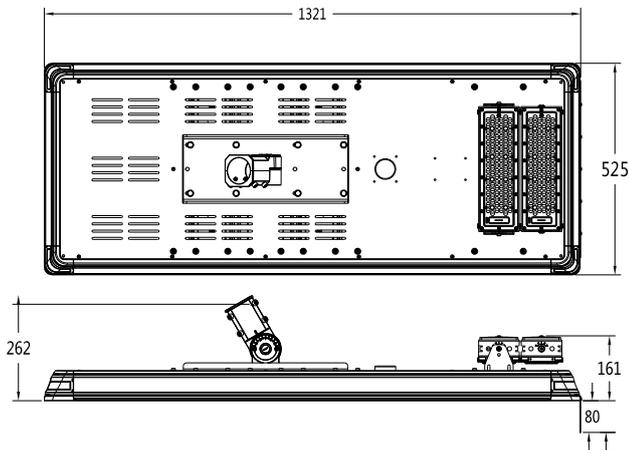
SSL-B20 Dimensions



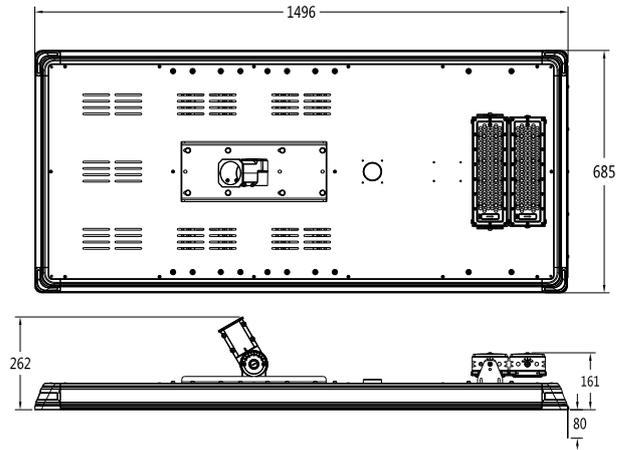
SSL-B30 Dimensions



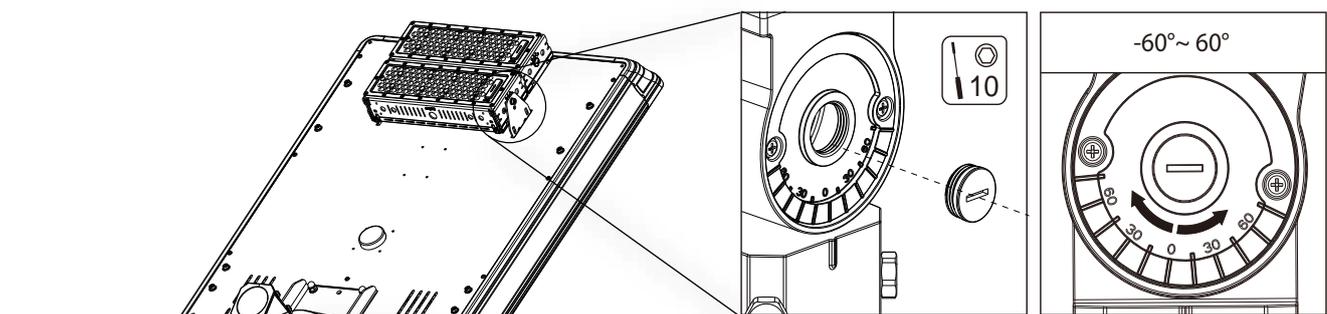
SSL-B50 Dimensions



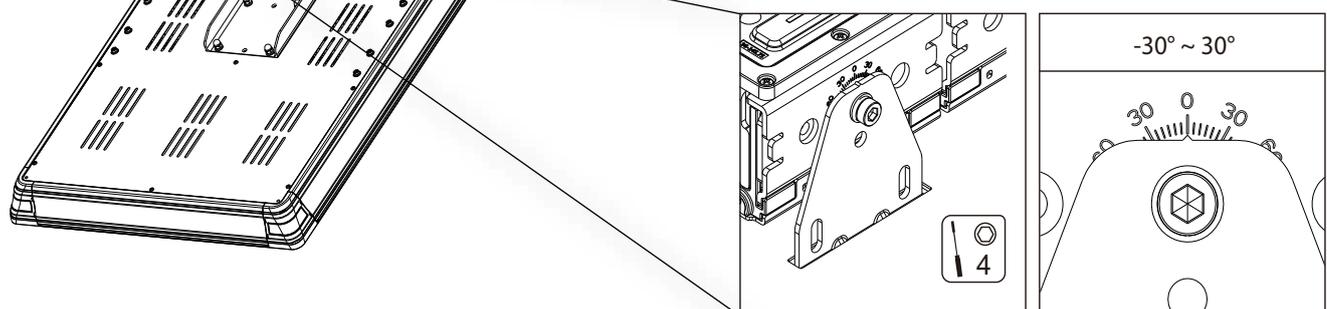
SSL-B60 Dimensions



Solar Panel Angle Adjustment



Light Angle Adjustment





Professional LED Canopy Lighting

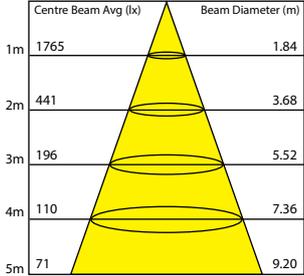
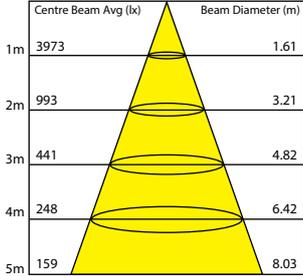
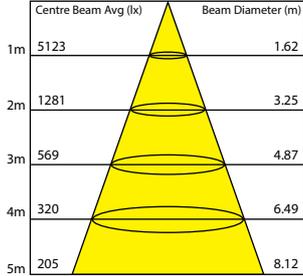
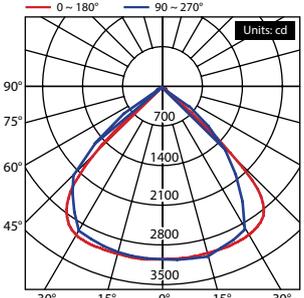
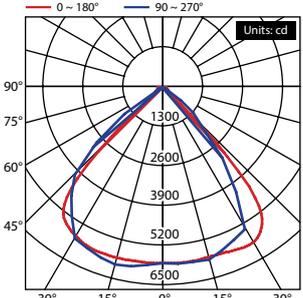
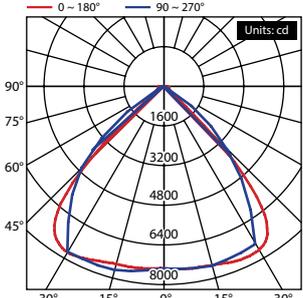
LCL-B Series: Surface or recessed mount canopy lights in 50W, 100W and 150W models

ENSA™ professional LED canopy light series is comprised of energy efficient fixtures purpose built for low-bay or canopy lighting applications. Lights include mounting components for both surface mount or recessed mount applications.

Each light in the series features an IP65 dust/water ingress protection rating making them perfect for demanding lighting applications such as in petroleum stations, car parks & car washes, industrial lighting and more. This series utilises high quality Epistar LEDs for high-intensity light output and long LED lifespan.

- Efficient replacements for high intensity discharge lamps
- Square light pattern with 90° x 90° beam angle
- Available in natural white colour temperature (4500K)
- Lights include kits for surface and recessed mounting
- IP65 dust and weather resistant for external use
- Series is IPART approved for use in the NSW ESS

Series Specifications

Model	LCL-B50	LCL-B100	LCL-B150
Product Image			
Series Name	LCL-B Series Professional LED Canopy Lights		
Optical			
Light Output	5500lm	10500lm	15500lm
Luminous Efficacy	>100lm/W	>100lm/W	>100lm/W
Colour Temperature	4500K		
Colour Rendering Index	>80		
Beam Angle	90° x 90°		
Light Decay	<3% at 6,000 hours		
Rated Lifespan	30,000 hours		
Electrical			
Power Consumption	50W	100W	150W
Input Voltage	100 ~ 240VAC		
Power Factor	>0.90	>0.95	>0.95
Dimmable	N/A		
General			
Ingress Protection	IP65		
Plug / Socket / Base	3-pin AC plug		
Reflector / Diffuser	Individual clear acrylic LED lens (PMMA)		
Housing Adjustments	Surface mount and recessed mount kit included		
Operating Environment	-20° ~ 45°C / 15~90% humidity		
Dimensions	300 x 300 x 89mm (surface) / 400 x 400 x 90mm (recessed, 320 x 320mm cutout size)		
Certifications	IPART		
Photometry			
Illuminance at a Distance			
			

Ordering Information

Type	Series	Wattage	Colour Temperature
LCL	- B	50 (50W) 100 (100W) 150 (150W)	- N (Natural white)
LCL-B150-N: 150W Surface or Recessed Mount LED Canopy Light in Natural White			



Professional LED Panel Lighting

LPL-A series: Low unified glare rating panel lighting in 36W and 48W models

ENSA™ LED panel lights are for replacing traditional tube lighting and are best suited for office and business, in medical and educational environments, in conference rooms, and more. These convenient and efficient lights have a standard rectangular profile (1200 x 300mm) and can be easily recessed in tiled ceilings, surface mounted or suspension mounted.

Each ENSA™ LED panel light features a low Unified Glare Rating, providing a pleasing light that isn't distracting or detrimental to workplace productivity. They are the efficient LED upgrade solution for fluorescent tube troffers.

- Minimalist, stylish & efficient 9mm thick LED panel light
- Recessed, suspension & surface mounting options
- Wide 90°/110° beam angle for even light distribution
- Available in cool & natural white colour temperatures
- Low UGR: Create pleasing, low glare, well lit spaces
- 30,000hrs LED lifespan & <3% light decay over 6,000hrs
- Designed to easily replace fluorescent troffer fixtures
- Series is IPART approved for use in the NSW ESS

Series Specifications

Model	LPL-A36	LPL-A48
Product Image		
Series Name	LPL-A Series Professional LED Panel Lights	
Optical		
Light Output	3300lm	4300lm
Luminous Efficacy	92lm/W	90lm/W
Colour Temperature	4000K / 6000K	
Colour Rendering Index	>80	
Beam Angle	110°	90°
Light Decay	<3% at 6,000 hours	
Rated Lifespan	>30,000 hours	
Electrical		
Power Consumption	36W	48W
Input Voltage	100 ~ 240VAC	
Power Factor	> 0.95	
Dimmable	N/A	
General		
Ingress Protection	IP20	
Plug / Socket / Base	3-pin AC plug with external driver	
Reflector / Diffuser	Frosted diffuser with UGR <22	Frosted diffuser with UGR <19
Housing Adjustments	Recessed (standard) / Hanging (optional) / Surface (optional)	
Operating Environment	-20°C ~ 40°C	
Dimensions	295 x 1195 x 9mm	
Certifications	IPART	

Photometry	LPL-A36	LPL-A48																																				
Illuminance at a Distance	<table border="1"> <thead> <tr> <th>Distance (m)</th> <th>Centre Beam Avg (lx)</th> <th>Beam Diameter (m)</th> </tr> </thead> <tbody> <tr><td>1m</td><td>353</td><td>2.91</td></tr> <tr><td>2m</td><td>88</td><td>5.81</td></tr> <tr><td>3m</td><td>39</td><td>8.72</td></tr> <tr><td>4m</td><td>22</td><td>11.62</td></tr> <tr><td>5m</td><td>14</td><td>14.42</td></tr> </tbody> </table>	Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)	1m	353	2.91	2m	88	5.81	3m	39	8.72	4m	22	11.62	5m	14	14.42	<table border="1"> <thead> <tr> <th>Distance (m)</th> <th>Centre Beam Avg (lx)</th> <th>Beam Diameter (m)</th> </tr> </thead> <tbody> <tr><td>1m</td><td>1455</td><td>1.19</td></tr> <tr><td>2m</td><td>364</td><td>2.39</td></tr> <tr><td>3m</td><td>162</td><td>3.58</td></tr> <tr><td>4m</td><td>91</td><td>4.78</td></tr> <tr><td>5m</td><td>58</td><td>5.97</td></tr> </tbody> </table>	Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)	1m	1455	1.19	2m	364	2.39	3m	162	3.58	4m	91	4.78	5m	58	5.97
Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)																																				
1m	353	2.91																																				
2m	88	5.81																																				
3m	39	8.72																																				
4m	22	11.62																																				
5m	14	14.42																																				
Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)																																				
1m	1455	1.19																																				
2m	364	2.39																																				
3m	162	3.58																																				
4m	91	4.78																																				
5m	58	5.97																																				
Luminous Light Distribution	<p>Units: cd</p>	<p>Units: cd</p>																																				

Ordering Information

Type	Series	Wattage	Colour Temperature
LPL	- A	36 (36W) 48 (48W)	- CW (Cool white) NW (Natural white)

LPL-A36-CW: 36W LED Panel Light in Cool White

Accessories

Model	LPL-AS	LPL-AH
Product Image		
Type	Surface mount kit	Hanging mount kit
Components	4 x matte white aluminium panels, includes fasteners	Lockable steel cable tethers, includes clips & fasteners



Intelligent Sensor LED Batten Lighting

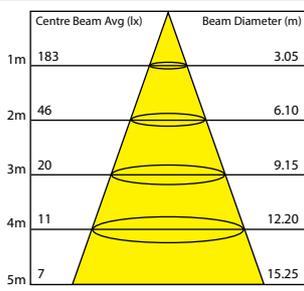
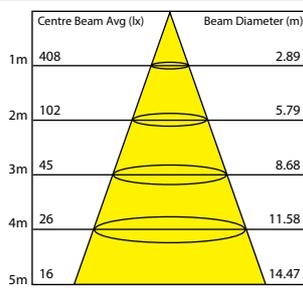
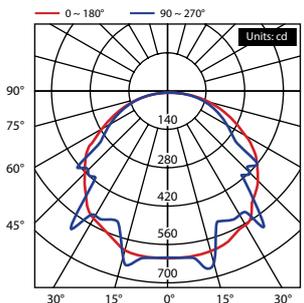
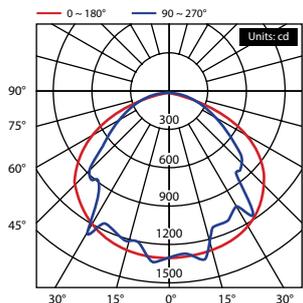
LEDBTS Series: 18W and 36W sensor battens in standard 600mm & 1200mm models

The ENSA™ LED batten light series comprises truly customisable energy efficient lighting solutions that deliver unparalleled control over your lighting, without the need for a complex management system.

Each LED batten uses a fully-configurable ambient light sensor, 5.8GHz microwave motion sensor and light on-timer in tandem, achieving impressively low total energy consumption when compared to traditional twin-batten fluorescent tubes. They are perfect for areas with intermittent people traffic such as in stairwells, corridors, underpasses, multi-storey car parks and more.

- Tailor your light use to further compound energy savings
- Adjustable light & motion sensing with on-time control
- Sensor can detect motion through glass and thin walls
- Built tough housing: IP65 dust and weather resistant
- Control standby mode: completely off or half brightness
- Long lifespan LED lighting: rated for up to 50,000 hours

Series Specifications

Model	LEDBT18WS	LEDBT36WS																																				
Product Image																																						
Series Name	LEDBTS Series: Standard LED Smart Batten																																					
Optical																																						
Light Output	1350lm	3240lm																																				
Luminous Efficacy	75lm/W	90lm/W																																				
Colour Temperature	6000K																																					
Colour Rendering Index	> 70																																					
Beam Angle	140°																																					
Light Decay	< 15% at 20,000 hours																																					
Rated Lifespan	> 50,000 hours																																					
Electrical																																						
Power Consumption	18W	36W																																				
Input Voltage	220 ~ 240VAC (50Hz)																																					
Power Factor	> 0.9																																					
Dimmable	N/A																																					
Detection																																						
Ambient Light Sensor	3 ~ 2000lx (adjustable)																																					
Motion Detection	360° Microwave (5.8GHz) / 8m radius (adjustable)																																					
On-Time Delay	10s ~ 12min (adjustable)																																					
Standby Light Modes	Off (0% brightness)																																					
General																																						
Ingress Protection	IP65																																					
Plug / Socket / Base	Internal terminal block																																					
Reflector / Diffuser	Clear polycarbonate diffuser / Metal clips																																					
Operating Environment	-20° ~ 50°C																																					
Dimensions	600 x 86 x 65mm	1200 x 95 x 80mm																																				
Photometry																																						
Illuminance at a Distance	 <table border="1"> <thead> <tr> <th>Distance (m)</th> <th>Centre Beam Avg (lx)</th> <th>Beam Diameter (m)</th> </tr> </thead> <tbody> <tr><td>1m</td><td>183</td><td>3.05</td></tr> <tr><td>2m</td><td>46</td><td>6.10</td></tr> <tr><td>3m</td><td>20</td><td>9.15</td></tr> <tr><td>4m</td><td>11</td><td>12.20</td></tr> <tr><td>5m</td><td>7</td><td>15.25</td></tr> </tbody> </table>	Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)	1m	183	3.05	2m	46	6.10	3m	20	9.15	4m	11	12.20	5m	7	15.25	 <table border="1"> <thead> <tr> <th>Distance (m)</th> <th>Centre Beam Avg (lx)</th> <th>Beam Diameter (m)</th> </tr> </thead> <tbody> <tr><td>1m</td><td>408</td><td>2.89</td></tr> <tr><td>2m</td><td>102</td><td>5.79</td></tr> <tr><td>3m</td><td>45</td><td>8.68</td></tr> <tr><td>4m</td><td>26</td><td>11.58</td></tr> <tr><td>5m</td><td>16</td><td>14.47</td></tr> </tbody> </table>	Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)	1m	408	2.89	2m	102	5.79	3m	45	8.68	4m	26	11.58	5m	16	14.47
Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)																																				
1m	183	3.05																																				
2m	46	6.10																																				
3m	20	9.15																																				
4m	11	12.20																																				
5m	7	15.25																																				
Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)																																				
1m	408	2.89																																				
2m	102	5.79																																				
3m	45	8.68																																				
4m	26	11.58																																				
5m	16	14.47																																				
Luminous Light Distribution																																						

Ordering Information

Type	Wattage	Features
LEDBT	18W (18W) 36W (36W)	S (Sensor batten)
LEDBT36WS: 36W LED Intelligent Batten Light		



Intelligent LED Batten Lighting with Backup

LEDBTWS2 / SE Series: 18W and 36W battens in standard or battery backup models

The ENSA™ LED batten light series comprises customisable energy efficient lighting solutions that deliver control over your lighting, without the need for a complex management system. Models are available as standard sensor batten lights or as an emergency sensor batten light fitted with an emergency backup battery for up to 5 hours light uptime.

Intelligent emergency battens feature motion detection, on-time delay and standby time delay functions to tailor your light use for efficiency & practicality. Each model features 2-stage dimming and can be configured to stay at 100% brightness, to dim and then turn off, or to dim and stay dimmed. Ideal in stairwells, corridors, underpasses, multi-storey car parks and more.

- 18 / 36W LED batten lights in standard & intelligent models
- Tailor your light use to further compound energy savings
- Adjustable light-use controls such as on-time delay
- Sensor can detect motion through glass and thin walls
- Built with tough housing: IP65 dust and weather resistant
- Emergency lighting models are AS2293.3 approved.
- Easy access TEST button for emergency light testing
- Series is IPART approved for use in the NSW ESS

Series Specifications

Model	LEDBT18WS2	LEDBT36WS2	LEDBT18WSE	LEDBT36WSE
Series Name	LEDBT2 Series: Standard LED Batten		LEDBTSE Series: Battery Backup LED Batten	
Optical				
Light Output	1980lm	3900lm	1980lm	3900lm
Luminous Efficacy	110lm/W	108lm/W	110lm/W	108lm/W
Colour Temperature	6000K			
Colour Rendering Index	> 80			
Beam Angle	126°	123°	126°	123°
Light Decay	L70 at 54,000 hours			
Rated Lifespan	54,000 hours			
Electrical				
Power Consumption	18W	36W	18W	36W
Input Voltage	180 ~ 240VAC (50 ~ 60Hz)			
Power Factor	>0.9		>0.95	
Battery Backup	N/A		6.4V 3000mAh LiFePO4	
Emergency Power Output	N/A		3.6W / 5 hours uptime	
Control				
Motion Detection	360° 5.8GHz Microwave / 8m max. radius / 50% ~ 100% adjustable (default: 100%)			
On-Time Delay	5s / 30s / 90s / 180s (default: 90s)			
Dimmed Brightness	20% / 40% / 60% / 100% (default: 20%)			
Dimming Timeout	0s / 90s / 180s / ∞s (default: ∞s)			
Dimming Description	Turn off / Time delay / Always on			
General				
Ingress Protection	IP65			
Plug / Socket / Base	Internal terminal block			
Installation Materials	Mounting clips, wall screws & plugs			
Reflector / Diffuser	Frosted diffuser			
Operating Environment	-20° ~ 40°C			
Dimensions	655 x 108 x 85mm	1260 x 108 x 85mm	655 x 108 x 85mm	1260 x 108 x 85mm
Certifications	IPART			
Photometry				
	18W models		36W models	
Illuminance at a Distance				

Ordering Information

Type	Wattage	Features
LEDBT	18W (18W) 36W (36W)	S2 (Non-emergency sensor batten) SE (Emergency sensor batten)
LEDBT36WSE: 36W LED Sensor Batten with Backup Battery		



Intelligent LED Oyster Lighting with Backup

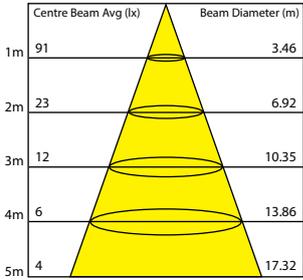
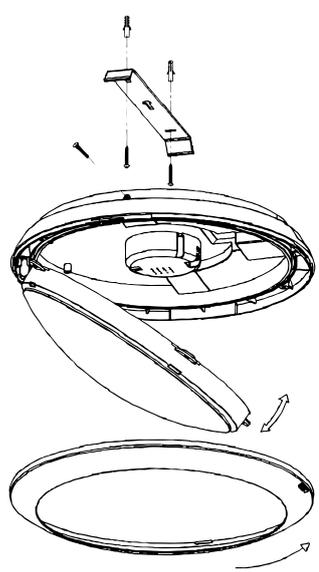
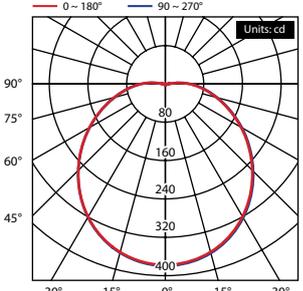
LOL-A Series: 16W LED oyster lights in standard and intelligent models - in warm or cool white

The LOL-A oyster light series delivers efficient lighting to any environment, indoors or outdoors. Available in warm or cool white colour temperatures as a standard light, with an intelligent sensor or with an intelligent sensor plus emergency backup battery.

The series features a wide 120° beam coverage and a frosted diffuser to reduce glare. The intelligent oyster light models feature three smart ways to customise your lighting with a fully-configurable ambient light sensor, 5.8GHz microwave motion sensor and light on-timer in tandem. This makes them the perfect lighting solution for areas with intermittent traffic such as in apartment complexes, stairwells, walkways, campuses and more.

- Tailor your light use to further compound energy savings.
- Adjustable light-use controls such as on-time delay.
- Sensor can detect motion through glass and thin walls.
- Robust IP66/IK10 weather & vandal resistant housing.
- Modern design with frosted diffuser and white surround.
- Long lifespan LED lighting: rated for up to 30,000 hours.

Series Specifications

Model	LOL-A16	LOL-A16-S	LOL-A16-SE
Product Image			
Series Name	LOL-A Series: LED Oyster Lights		
Optical			
Light Output	1200lm		
Luminous Efficacy	75lm/W		
Colour Temperature	3000K / 5000K		
Colour Rendering Index	> 80		
Beam Angle	120°		
Light Decay	< 15% at 10,000 hours		
Rated Lifespan	30,000 hours		
Electrical			
Power Consumption	16W		
Input Voltage	220 ~ 240VAC (50Hz)		
Power Factor	> 0.9		
Dimmable	N/A		
Battery Backup	N/A	N/A	3.7V 1500mAh NiMH >300min uptime at 1.2W
Emergency Brightness	N/A	N/A	20% sensing / 100% on detection
Detection			
Ambient Light Sensor	N/A	< 3 ~ 2000lx (adjustable)	< 5 ~ 2000lx (adjustable)
Motion Detection	N/A	360° Microwave (5.8GHz) / 8m radius (adjustable)	
On-Time Delay	N/A	10s ~ 12min (adjustable)	10s ~ 10min (adjustable)
Standby Light Modes	N/A	N/A	20% brightness
General			
Ingress Protection	IP66		
Vandal Resistance	IK10		
Plug / Socket / Base	Internal terminal block		
Reflector / Diffuser	Frosted diffuser		
Operating Environment	-20° ~ 50°C		
Dimensions	Ø300 x 95mm		
Photometry		Diagrams	
Illuminance at a Distance 	Assembly 		
Luminous Light Distribution 			

Ordering Information

Type	Series	Wattage	Colour Temperature	Features
LOL	-	A	16 (16W)	-
			W (Warm white)	S (Sensor)
			C (Cool white)	SE (Sensor & backup battery)
LOL-A16-CSE: 16W LED Oyster Light in Cool White with Sensor & Backup Battery				



Professional T8 LED Tube Lighting

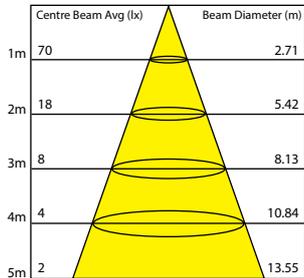
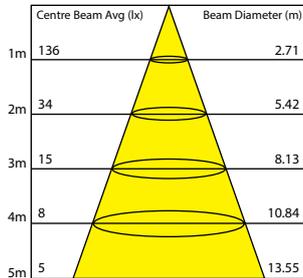
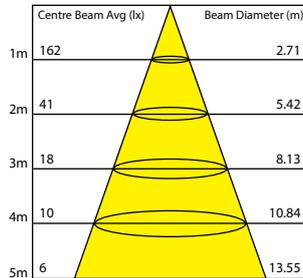
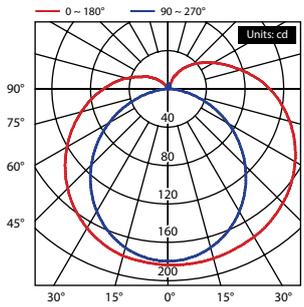
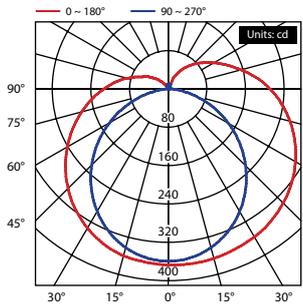
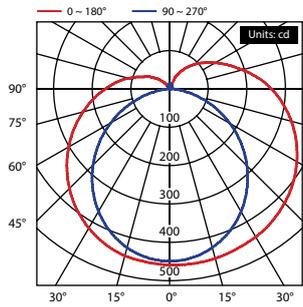
LTU-A Series: High performance LED tubes in 600mm, 1200mm and 1500mm models

The ENSA™ LED tube light series is designed to reduce your fluorescent tube lighting costs by a minimum of 50% and are available in 600mm (2ft), 1200mm (4ft) and 1500mm (5ft) lengths. LTU-A series tubes are more than just energy efficient options to conventional fluorescents. They also deliver better quality & longer lasting light with no UV, they do not require a magnetic or electronic ballast, they turn on/off instantly with no warm up period, they do not fade or flicker, and are 100% recyclable with no mercury or toxic materials.

Each tube features an AC input at one end only and is supplied with an LED starter to replace fluorescent tube fuses.

- Cut your energy use in half by switching to LED tubes.
- High luminous efficacy for optimal return on investment.
- Long lifespan LED lighting: rated for up to 50,000 hours.
- Retrofit or replace: ideal for carparks, offices and more.
- Polycarbonate for low risk of shock (standard model only).
- Supplied with replacement LED starter.

Series Specifications

Model	LTU-A9	LTU-A18	LTU-A22																																																						
Product Image																																																									
Series Name	LTU-A Series T8 LED Tube Lights																																																								
Optical																																																									
Light Output	900lm	1800lm	2200lm																																																						
Luminous Efficacy	100lm/W																																																								
Colour Temperature	6000K																																																								
Colour Rendering Index	> 80																																																								
Beam Angle	140°																																																								
Light Decay	< 3% at 6,000 hours																																																								
Rated Lifespan	> 50,000 hours																																																								
Electrical																																																									
Power Consumption	9W	18W	22W																																																						
Input Voltage	100 ~ 240VAC																																																								
Power Factor	> 0.9																																																								
Dimmable	N/A																																																								
Detection																																																									
Motion Detection	N/A																																																								
On-Time Delay	N/A																																																								
Standby Light Modes	N/A																																																								
General																																																									
Plug / Socket / Base	T8 size / G13 base																																																								
Reflector / Diffuser	Frosted diffuser																																																								
Housing Construction	Polycarbonate																																																								
Operating Environment	-35° ~ 55°C																																																								
Dimensions	Ø26 x 588mm	Ø26 x 1198mm	Ø26 x 1498mm																																																						
Photometry																																																									
Illuminance at a Distance	 <table border="1"> <thead> <tr> <th>Distance (m)</th> <th>Centre Beam Avg (lx)</th> <th>Beam Diameter (m)</th> </tr> </thead> <tbody> <tr><td>1m</td><td>70</td><td>2.71</td></tr> <tr><td>2m</td><td>18</td><td>5.42</td></tr> <tr><td>3m</td><td>8</td><td>8.13</td></tr> <tr><td>4m</td><td>4</td><td>10.84</td></tr> <tr><td>5m</td><td>2</td><td>13.55</td></tr> </tbody> </table>	Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)	1m	70	2.71	2m	18	5.42	3m	8	8.13	4m	4	10.84	5m	2	13.55	 <table border="1"> <thead> <tr> <th>Distance (m)</th> <th>Centre Beam Avg (lx)</th> <th>Beam Diameter (m)</th> </tr> </thead> <tbody> <tr><td>1m</td><td>136</td><td>2.71</td></tr> <tr><td>2m</td><td>34</td><td>5.42</td></tr> <tr><td>3m</td><td>15</td><td>8.13</td></tr> <tr><td>4m</td><td>8</td><td>10.84</td></tr> <tr><td>5m</td><td>5</td><td>13.55</td></tr> </tbody> </table>	Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)	1m	136	2.71	2m	34	5.42	3m	15	8.13	4m	8	10.84	5m	5	13.55	 <table border="1"> <thead> <tr> <th>Distance (m)</th> <th>Centre Beam Avg (lx)</th> <th>Beam Diameter (m)</th> </tr> </thead> <tbody> <tr><td>1m</td><td>162</td><td>2.71</td></tr> <tr><td>2m</td><td>41</td><td>5.42</td></tr> <tr><td>3m</td><td>18</td><td>8.13</td></tr> <tr><td>4m</td><td>10</td><td>10.84</td></tr> <tr><td>5m</td><td>6</td><td>13.55</td></tr> </tbody> </table>	Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)	1m	162	2.71	2m	41	5.42	3m	18	8.13	4m	10	10.84	5m	6	13.55
Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)																																																							
1m	70	2.71																																																							
2m	18	5.42																																																							
3m	8	8.13																																																							
4m	4	10.84																																																							
5m	2	13.55																																																							
Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)																																																							
1m	136	2.71																																																							
2m	34	5.42																																																							
3m	15	8.13																																																							
4m	8	10.84																																																							
5m	5	13.55																																																							
Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)																																																							
1m	162	2.71																																																							
2m	41	5.42																																																							
3m	18	8.13																																																							
4m	10	10.84																																																							
5m	6	13.55																																																							
Luminous Light Distribution																																																									

Ordering Information

Type	Series	Wattage	Colour Temperature
LTU	-	A	9 (9W) 18 (18W) 22 (22W)
			- CW (Cool white)
LTU-A18-CW: 18W LED Tube Light in Cool White			



T8 LED Motion Sensor Tube Lighting

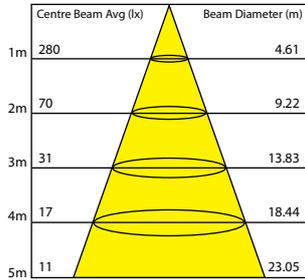
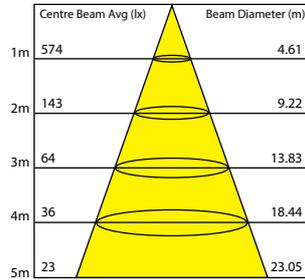
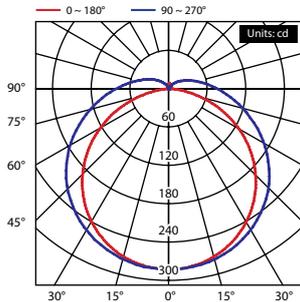
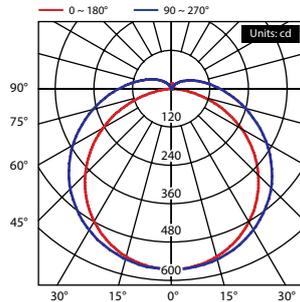
LTU-C Series: PIR motion LED sensor tubes in 600mm and 1200mm models

Compound your LED energy savings by choosing ENSA™ Intelligent LED Tube Lighting which are not only 50% more energy efficient than conventional fluorescents, but utilise motion sensor technology to achieve impressively low total energy consumption. This makes them the perfect energy efficient light for areas with intermittent people traffic such as in apartment complexes, stairwells, walkways, university campuses and more.

LTU-C series tubes do not require a magnetic or electronic ballast, and each tube features an AC input at one end only and is supplied with an LED starter to replace fluorescent tube fuses. *(see installation diagrams)*

- Cut your energy use in half by switching to LED tubes.
- 360° passive infrared motion detection up to 8m radius.
- 60s delay after last detected motion, then dims to 30%.
- High luminous efficacy for optimal return on investment.
- Long lifespan LED lighting: rated for up to 50,000 hours.
- Supplied with replacement LED starter.

Series Specifications

Model	LTU-C9-CS	LTU-C18-CS																																				
Product Image																																						
Series Name	LTU-C Series T8 LED Motion Sensor Tube Lights																																					
Optical																																						
Light Output	750lm	1800lm																																				
Luminous Efficacy	83lm/W	100lm/W																																				
Colour Temperature	6000K																																					
Colour Rendering Index	> 80																																					
Beam Angle	120°																																					
Light Decay	< 15% at 20,000 hours																																					
Rated Lifespan	> 50,000 hours																																					
Electrical																																						
Power Consumption	9W	18W																																				
Input Voltage	85 ~ 265VAC	85 ~ 265VAC																																				
Power Factor	> 0.92																																					
Dimmable	Yes																																					
Detection																																						
Motion Detection	8m radius																																					
On-Time Delay	60s																																					
Standby Light Mode	30% brightness																																					
General																																						
Plug / Socket / Base	T8 size / G13 base																																					
Reflector / Diffuser	Frosted diffuser																																					
Housing Construction	Polycarbonate & aluminium																																					
Operating Environment	-25° ~ 40°C																																					
Dimensions	Ø26 x 600mm	Ø26 x 1200mm																																				
Photometry																																						
Illuminance at a Distance	 <table border="1"> <thead> <tr> <th>Distance (m)</th> <th>Centre Beam Avg (lx)</th> <th>Beam Diameter (m)</th> </tr> </thead> <tbody> <tr><td>1m</td><td>280</td><td>4.61</td></tr> <tr><td>2m</td><td>70</td><td>9.22</td></tr> <tr><td>3m</td><td>31</td><td>13.83</td></tr> <tr><td>4m</td><td>17</td><td>18.44</td></tr> <tr><td>5m</td><td>11</td><td>23.05</td></tr> </tbody> </table>	Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)	1m	280	4.61	2m	70	9.22	3m	31	13.83	4m	17	18.44	5m	11	23.05	 <table border="1"> <thead> <tr> <th>Distance (m)</th> <th>Centre Beam Avg (lx)</th> <th>Beam Diameter (m)</th> </tr> </thead> <tbody> <tr><td>1m</td><td>574</td><td>4.61</td></tr> <tr><td>2m</td><td>143</td><td>9.22</td></tr> <tr><td>3m</td><td>64</td><td>13.83</td></tr> <tr><td>4m</td><td>36</td><td>18.44</td></tr> <tr><td>5m</td><td>23</td><td>23.05</td></tr> </tbody> </table>	Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)	1m	574	4.61	2m	143	9.22	3m	64	13.83	4m	36	18.44	5m	23	23.05
Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)																																				
1m	280	4.61																																				
2m	70	9.22																																				
3m	31	13.83																																				
4m	17	18.44																																				
5m	11	23.05																																				
Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)																																				
1m	574	4.61																																				
2m	143	9.22																																				
3m	64	13.83																																				
4m	36	18.44																																				
5m	23	23.05																																				
Luminous Light Distribution																																						

Ordering Information

Type	Series	Wattage	Colour Temperature	Other Features
LTU	- C	9 (9W) 18 (18W)	- C (Cool white)	S (Sensor)
LTU-C18-CS: 18W LED Tube Light in Cool White with PIR Motion Sensing				



Linkable LED Strip Lighting

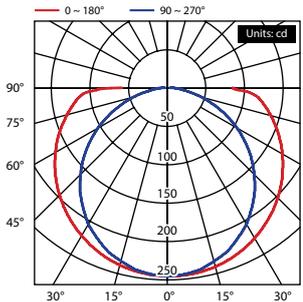
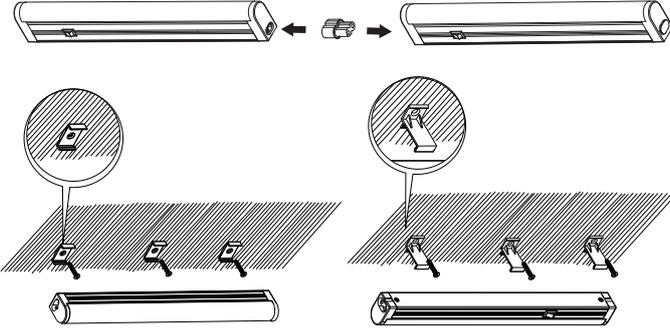
LEDBR Series: 13W in two colour temperatures, with surface & right angle brackets

The ENSA™ LED linkable strip light range offers energy efficient lighting in a uniquely versatile, slim package. Connect three LED strip lights together for a maximum 3.5m length LED light strip.

Each linkable strip light comes standard with light connectors, connector safety caps, and surface mount and right angle mount clips. The simple mounting clips enable implementation of the linkable strip light across a wide variety of applications including shelf and cabinet lighting, accent lighting, recessed wall-wash lighting and more.

- Unique, energy efficient linkable LED strip lighting.
- Connect up to 3 lights together; easy on/off switch.
- 78lm/W luminous efficacy & 30,000 hours service life.
- Available in 3000K warm white and 6500K cool white.
- Right angle & surface clips enable rapid light installation.
- Wide 135° beam angle and >80 colour rendering index.

Series Specifications

Model	LEDBR13W													
Product Image														
Series Name	LEDBR Series: Linkable LED Lighting													
Optical														
Light Output	1050lm													
Luminous Efficacy	78lm/W													
Colour Temperature	3000K / 6500K													
Colour Rendering Index	> 80													
Beam Angle	135°													
Light Decay	<10% at 6,000 hours													
Rated Lifespan	> 30,000 hours													
Electrical														
Power Consumption	13.5W													
Input Voltage	220 ~ 240VAC (50 ~ 60Hz)													
Power Factor	> 0.5													
Dimmable	N/A													
General														
Plug / Socket / Base	3-pin AC plug													
Reflector / Diffuser	Frosted diffuser													
Housing Construction	Polycarbonate & aluminium													
Operating Environment	-25° ~ +40°C													
Dimensions	1170 x 25 x 35mm													
Photometry														
Illuminance at a Distance	<table border="1"> <thead> <tr> <th>Centre Beam Avg (lx)</th> <th>Beam Diameter (m)</th> </tr> </thead> <tbody> <tr> <td>257</td> <td>1.73</td> </tr> <tr> <td>64</td> <td>3.46</td> </tr> <tr> <td>29</td> <td>5.19</td> </tr> <tr> <td>16</td> <td>6.93</td> </tr> <tr> <td>10</td> <td>10.39</td> </tr> </tbody> </table>	Centre Beam Avg (lx)	Beam Diameter (m)	257	1.73	64	3.46	29	5.19	16	6.93	10	10.39	
Centre Beam Avg (lx)	Beam Diameter (m)													
257	1.73													
64	3.46													
29	5.19													
16	6.93													
10	10.39													
Diagrams														
Mounting Options														

Ordering Information

Type	Wattage	Colour Temperature
LEDBR	13W (13.5W)	3K (Warm white) 65K (Cool white)

LEDBR13W65K: 13W LED Linkable Strip Light in Cool White



Premium Adjustable Body LED Downlights

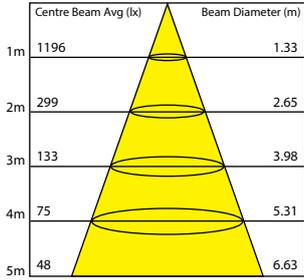
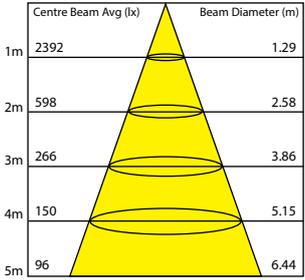
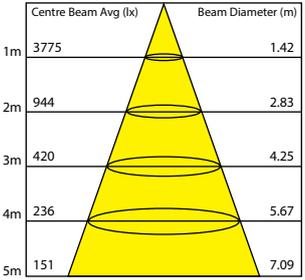
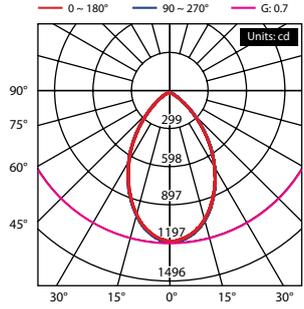
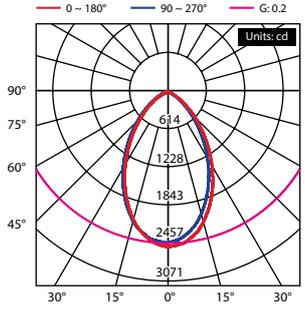
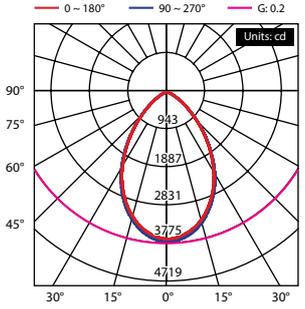
LEDDL Series: Tilt/rotate adjustable circular downlights in 20W, 38W and 60W models

Choose the ENSA™ premium range of adjustable LED downlights for the best in light output, service life, colour rendering accuracy and more. Available in cool and warm white colour temperatures, these downlights utilise high quality Samsung LEDs to provide a minimum of 95lm/W luminous efficacy and up to 50,000 hours rated LED lifespan.

Each downlight in the range can rotate 350° and tilt up to 60°, coupled with a 60° beam angle, these lights are perfect for versatile spot or key lighting in retail spaces, showrooms, foyers, office environments and more.

- Excellent alternative to halogen and metal-halide lamps.
- Ideal for use in shopfitting applications & large fitouts.
- Versatile: 350° rotation and 60° tilt adjustable housing.
- Minimalist, bevelled white gimble downlight surround.
- Samsung LEDs for optimal performance & lifespan.
- Hole cut size: Ø165mm (20W, 38W) and Ø215mm (60W).

Series Specifications

Model	LEDDL20WxKR	LEDDL38WxKR	LEDDL60WxKR																																																						
Product Image																																																									
Series Name	LEDDL Series: Premium Adjustable Series LED Downlights																																																								
Optical																																																									
Light Output	1890lm	3640lm	6300lm																																																						
Luminous Efficacy	95lm/W	96lm/W	105lm/W																																																						
Colour Temperature	3000K / 5500K																																																								
Colour Rendering Index	> 80																																																								
Beam Angle	60°																																																								
Light Decay	30% at 25,000 hours																																																								
Rated Lifespan	> 50,000 hours																																																								
Electrical																																																									
Power Consumption	20W	38W	60W																																																						
Input Voltage	85 ~ 265VAC																																																								
Power Factor	> 0.9																																																								
Dimmable	N/A																																																								
General																																																									
Plug / Socket / Base	3-pin AC plug with external driver																																																								
Reflector / Diffuser	Frosted diffuser																																																								
Housing Adjustments	Tilt 60° / Rotate 350°																																																								
Operating Environment	-20°C ~ 40°C																																																								
Dimensions	Ø195 x 175mm		Ø250 x 144mm																																																						
Hole Cut Size	Ø165mm		Ø215mm																																																						
Photometry																																																									
Illuminance at a Distance	 <table border="1"> <thead> <tr> <th>Distance (m)</th> <th>Centre Beam Avg (lx)</th> <th>Beam Diameter (m)</th> </tr> </thead> <tbody> <tr><td>1m</td><td>1196</td><td>1.33</td></tr> <tr><td>2m</td><td>299</td><td>2.65</td></tr> <tr><td>3m</td><td>133</td><td>3.98</td></tr> <tr><td>4m</td><td>75</td><td>5.31</td></tr> <tr><td>5m</td><td>48</td><td>6.63</td></tr> </tbody> </table>	Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)	1m	1196	1.33	2m	299	2.65	3m	133	3.98	4m	75	5.31	5m	48	6.63	 <table border="1"> <thead> <tr> <th>Distance (m)</th> <th>Centre Beam Avg (lx)</th> <th>Beam Diameter (m)</th> </tr> </thead> <tbody> <tr><td>1m</td><td>2392</td><td>1.29</td></tr> <tr><td>2m</td><td>598</td><td>2.58</td></tr> <tr><td>3m</td><td>266</td><td>3.86</td></tr> <tr><td>4m</td><td>150</td><td>5.15</td></tr> <tr><td>5m</td><td>96</td><td>6.44</td></tr> </tbody> </table>	Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)	1m	2392	1.29	2m	598	2.58	3m	266	3.86	4m	150	5.15	5m	96	6.44	 <table border="1"> <thead> <tr> <th>Distance (m)</th> <th>Centre Beam Avg (lx)</th> <th>Beam Diameter (m)</th> </tr> </thead> <tbody> <tr><td>1m</td><td>3775</td><td>1.42</td></tr> <tr><td>2m</td><td>944</td><td>2.83</td></tr> <tr><td>3m</td><td>420</td><td>4.25</td></tr> <tr><td>4m</td><td>236</td><td>5.67</td></tr> <tr><td>5m</td><td>151</td><td>7.09</td></tr> </tbody> </table>	Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)	1m	3775	1.42	2m	944	2.83	3m	420	4.25	4m	236	5.67	5m	151	7.09
Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)																																																							
1m	1196	1.33																																																							
2m	299	2.65																																																							
3m	133	3.98																																																							
4m	75	5.31																																																							
5m	48	6.63																																																							
Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)																																																							
1m	2392	1.29																																																							
2m	598	2.58																																																							
3m	266	3.86																																																							
4m	150	5.15																																																							
5m	96	6.44																																																							
Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)																																																							
1m	3775	1.42																																																							
2m	944	2.83																																																							
3m	420	4.25																																																							
4m	236	5.67																																																							
5m	151	7.09																																																							
Luminous Light Distribution	 <p>— 0 ~ 180° — 90 ~ 270° — G: 0.7</p> <p>Units: cd</p>	 <p>— 0 ~ 180° — 90 ~ 270° — G: 0.2</p> <p>Units: cd</p>	 <p>— 0 ~ 180° — 90 ~ 270° — G: 0.2</p> <p>Units: cd</p>																																																						

Ordering Information

Type	Wattage	Colour Temperature	Other Features
LEDDL	20W (20W) 38W (38W) 60W (60W)	3K (Warm white) 5K (Cool white)	R (Round)
LEDDL20W3KR: 20W Round Adjustable Downlight in Warm White			



Premium Adjustable Body LED Downlights

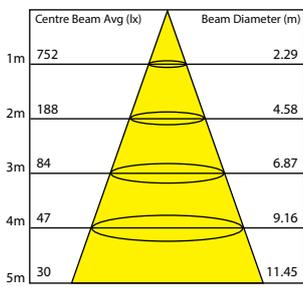
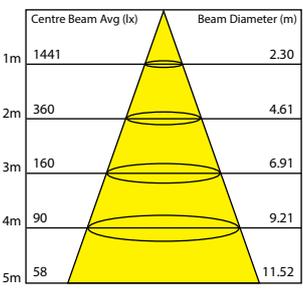
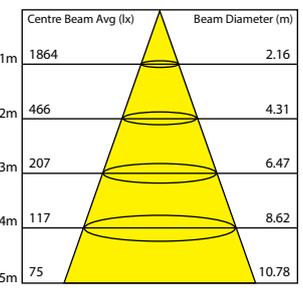
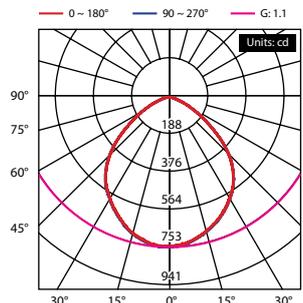
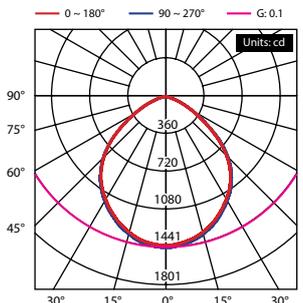
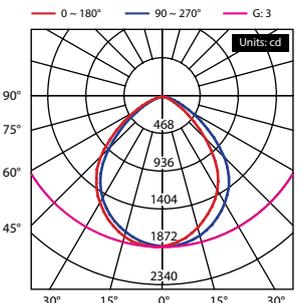
LEDDL5 Series: Tilt adjustable rectangular downlights in 20W, 38W and 48W models

Choose the ENSA™ premium range of adjustable LED downlights for the best in light output, service life, colour rendering accuracy and more. Available in cool and warm white colour temperatures, these downlights utilise high quality LEDs to provide a minimum of 100lm/W luminous efficacy and up to 50,000 hours rated LED lifespan.

Each downlight in the range can tilt up to 60° and features a wide beam angle of 100°. Their rectangular shape and light distribution makes them ideal for bay lighting, signage illumination and wall highlighting, especially in retail environments.

- Excellent alternative to halogen and metal-halide lamps
- Ideal for use in shopfitting applications & large fit-outs
- Excellent colour rendering, lifespan and light output
- Minimalist, bevelled white gimble downlight surround
- 60° tilt adjustable & frosted diffuser for glare reduction
- Uniform hole cut size across range: 227 x 130mm

Series Specifications

Model	LEDDL20WxKS	LEDDL38WxKS	LEDDL48WxKS																																				
Product Image																																							
Series Name	LEDDL Series: Premium Rectangular Adjustable Series LED Downlights																																						
Optical																																							
Light Output	2000lm	3800lm	4800lm																																				
Luminous Efficacy	100lm/W																																						
Colour Temperature	2700K / 6500K																																						
Colour Rendering Index	>80																																						
Beam Angle	100°																																						
Light Decay	30% at 25,000 hours																																						
Rated Lifespan	> 50,000 hours																																						
Electrical																																							
Power Consumption	20W	38W	48W																																				
Input Voltage	220 ~ 240VAC (50 ~ 60Hz)																																						
Power Factor	> 0.9																																						
Dimmable	Yes (TRIAC)																																						
General																																							
Plug / Socket / Base	3-pin AC plug with external driver																																						
Reflector / Diffuser	Frosted diffuser																																						
Housing Adjustments	Tilt 60°																																						
Operating Environment	-20°C ~ 40°C																																						
Dimensions	240 x 145 x 135mm																																						
Hole Cut Size	227 x 130mm																																						
Photometry																																							
Illuminance at a Distance	 <table border="1"> <thead> <tr> <th>Centre Beam Avg (lx)</th> <th>Beam Diameter (m)</th> </tr> </thead> <tbody> <tr><td>752</td><td>2.29</td></tr> <tr><td>188</td><td>4.58</td></tr> <tr><td>84</td><td>6.87</td></tr> <tr><td>47</td><td>9.16</td></tr> <tr><td>30</td><td>11.45</td></tr> </tbody> </table>	Centre Beam Avg (lx)	Beam Diameter (m)	752	2.29	188	4.58	84	6.87	47	9.16	30	11.45	 <table border="1"> <thead> <tr> <th>Centre Beam Avg (lx)</th> <th>Beam Diameter (m)</th> </tr> </thead> <tbody> <tr><td>1441</td><td>2.30</td></tr> <tr><td>360</td><td>4.61</td></tr> <tr><td>160</td><td>6.91</td></tr> <tr><td>90</td><td>9.21</td></tr> <tr><td>58</td><td>11.52</td></tr> </tbody> </table>	Centre Beam Avg (lx)	Beam Diameter (m)	1441	2.30	360	4.61	160	6.91	90	9.21	58	11.52	 <table border="1"> <thead> <tr> <th>Centre Beam Avg (lx)</th> <th>Beam Diameter (m)</th> </tr> </thead> <tbody> <tr><td>1864</td><td>2.16</td></tr> <tr><td>466</td><td>4.31</td></tr> <tr><td>207</td><td>6.47</td></tr> <tr><td>117</td><td>8.62</td></tr> <tr><td>75</td><td>10.78</td></tr> </tbody> </table>	Centre Beam Avg (lx)	Beam Diameter (m)	1864	2.16	466	4.31	207	6.47	117	8.62	75	10.78
	Centre Beam Avg (lx)	Beam Diameter (m)																																					
	752	2.29																																					
188	4.58																																						
84	6.87																																						
47	9.16																																						
30	11.45																																						
Centre Beam Avg (lx)	Beam Diameter (m)																																						
1441	2.30																																						
360	4.61																																						
160	6.91																																						
90	9.21																																						
58	11.52																																						
Centre Beam Avg (lx)	Beam Diameter (m)																																						
1864	2.16																																						
466	4.31																																						
207	6.47																																						
117	8.62																																						
75	10.78																																						
Luminous Light Distribution	 <p>0 ~ 180° (red), 90 ~ 270° (blue), G: 1.1 (pink)</p> <p>Units: cd</p>	 <p>0 ~ 180° (red), 90 ~ 270° (blue), G: 0.1 (pink)</p> <p>Units: cd</p>	 <p>0 ~ 180° (red), 90 ~ 270° (blue), G: 3 (pink)</p> <p>Units: cd</p>																																				
	<p>LEDDL20W5KS: 20W Rectangular Adjustable Downlight in Cool White</p>																																						

Ordering Information

Type	Wattage	Colour Temperature	Other Features
LEDDL	20W (20W) 38W (38W) 48W (48W)	3K (Warm white) 5K (Cool white)	S (Rectangular)

LEDDL20W5KS: 20W Rectangular Adjustable Downlight in Cool White



Premium Fixed Body LED Downlights

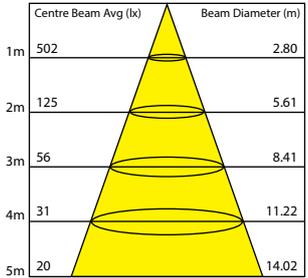
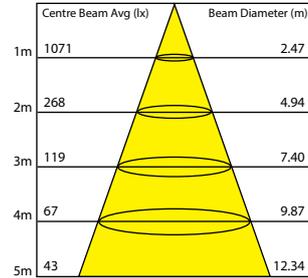
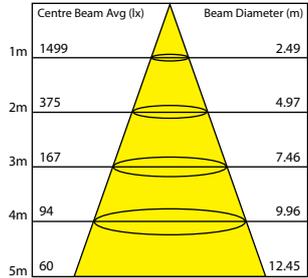
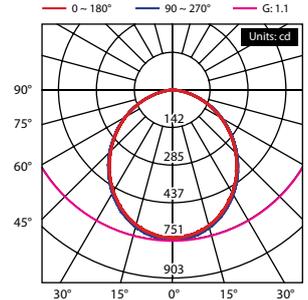
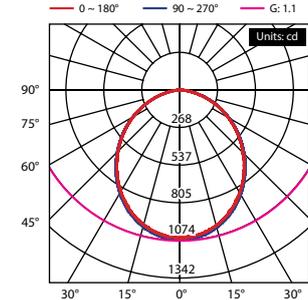
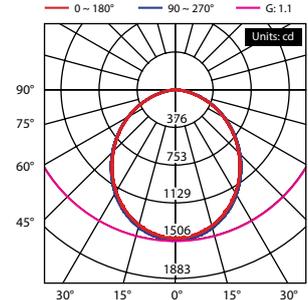
LEDDL RD Series: Dimmable downlights in 20W, 36W and 48W, in two colour temperatures

Choose the ENSA™ premium range of fixed LED downlights for the best in light output, service life, colour rendering accuracy and more. Available in cool and warm white colour temperatures, these downlights utilise high quality Samsung LEDs to provide a minimum of 92lm/W luminous efficacy and up to 50,000 hours rated LED lifespan.

With a 100° beam angle and circular light distribution, these lights are designed to provide evenly distributed, high quality light perfect for general purpose illumination in store fit-outs, galleries, residential and office environments and more.

- 100lm/W high efficiency, low energy use LED downlights
- 6" and 8" total diameter, suitable for retrofit installations
- Excellent colour rendering, lifespan and light output
- Minimalist, bevelled white gimble downlight surround
- Each downlight model features TRIAC dimming
- Hole cut size: Ø165mm (20W, 36W) and Ø205mm (48W)

Series Specifications

Model	LEDDL20WxK6RD	LEDDL36WxK6RD	LEDDL48WxK8RD																																				
Product Image																																							
Series Name	LEDDL RD Series: Premium Fixed Dimmable Series LED Downlights																																						
Optical																																							
Light Output	1900lm	3370lm	4600lm																																				
Luminous Efficacy	105lm/W	94lm/W	96lm/W																																				
Colour Temperature	2700K / 6500K																																						
Colour Rendering Index	> 80																																						
Beam Angle	60°																																						
Light Decay	30% at 25,000 hours																																						
Rated Lifespan	>50,000 hours																																						
Electrical																																							
Power Consumption	20W	36W	48W																																				
Input Voltage	100 ~ 240VAC																																						
Power Factor	> 0.9																																						
Dimmable	Yes (TRIAC)																																						
General																																							
Plug / Socket / Base	3-pin AC plug with external driver																																						
Reflector / Diffuser	Frosted diffuser																																						
Housing Adjustments	N/A																																						
Operating Environment	-20 ~ +40°C																																						
Dimensions	Ø195x 56mm		Ø245 x 54mm																																				
Hole Cut Size	Ø165mm		Ø205mm																																				
Photometry																																							
Illuminance at a Distance	 <table border="1"> <thead> <tr> <th>Centre Beam Avg (lx)</th> <th>Beam Diameter (m)</th> </tr> </thead> <tbody> <tr><td>502</td><td>2.80</td></tr> <tr><td>125</td><td>5.61</td></tr> <tr><td>56</td><td>8.41</td></tr> <tr><td>31</td><td>11.22</td></tr> <tr><td>20</td><td>14.02</td></tr> </tbody> </table>	Centre Beam Avg (lx)	Beam Diameter (m)	502	2.80	125	5.61	56	8.41	31	11.22	20	14.02	 <table border="1"> <thead> <tr> <th>Centre Beam Avg (lx)</th> <th>Beam Diameter (m)</th> </tr> </thead> <tbody> <tr><td>1071</td><td>2.47</td></tr> <tr><td>268</td><td>4.94</td></tr> <tr><td>119</td><td>7.40</td></tr> <tr><td>67</td><td>9.87</td></tr> <tr><td>43</td><td>12.34</td></tr> </tbody> </table>	Centre Beam Avg (lx)	Beam Diameter (m)	1071	2.47	268	4.94	119	7.40	67	9.87	43	12.34	 <table border="1"> <thead> <tr> <th>Centre Beam Avg (lx)</th> <th>Beam Diameter (m)</th> </tr> </thead> <tbody> <tr><td>1499</td><td>2.49</td></tr> <tr><td>375</td><td>4.97</td></tr> <tr><td>167</td><td>7.46</td></tr> <tr><td>94</td><td>9.96</td></tr> <tr><td>60</td><td>12.45</td></tr> </tbody> </table>	Centre Beam Avg (lx)	Beam Diameter (m)	1499	2.49	375	4.97	167	7.46	94	9.96	60	12.45
	Centre Beam Avg (lx)	Beam Diameter (m)																																					
	502	2.80																																					
125	5.61																																						
56	8.41																																						
31	11.22																																						
20	14.02																																						
Centre Beam Avg (lx)	Beam Diameter (m)																																						
1071	2.47																																						
268	4.94																																						
119	7.40																																						
67	9.87																																						
43	12.34																																						
Centre Beam Avg (lx)	Beam Diameter (m)																																						
1499	2.49																																						
375	4.97																																						
167	7.46																																						
94	9.96																																						
60	12.45																																						
Luminous Light Distribution																																							
	<p>— 0 ~ 180° — 90 ~ 270° — G: 1.1</p> <p>Units: cd</p>																																						
	<p>90° 75° 60° 45°</p> <p>30° 15° 0° 15° 30°</p>																																						

Ordering Information

Type	Wattage	Colour Temperature	Other Features
LEDDL	20W (20W)	3K (Warm white)	6 / 8 (Ø inches)
	36W (38W)	5K (Cool white)	R (Round)
	48W (48W)		D (Dimmable)
LEDDL48W5K8RD: 48W Round Fixed Dimmable Downlight in Cool White			



Commercial Adjustable Body LED Downlights

LDL-BD Adjustable Series: Available in six dimmable models, in two colour temperatures

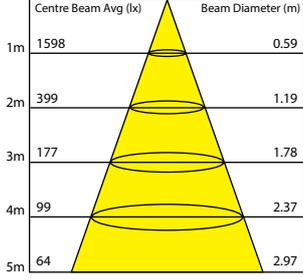
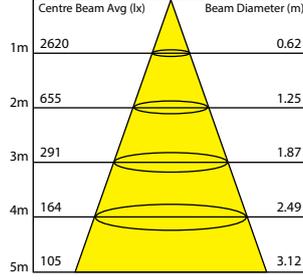
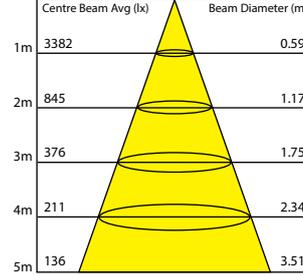
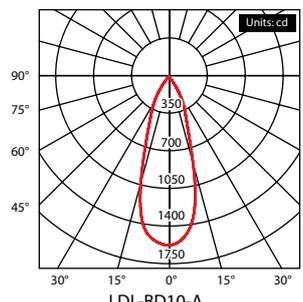
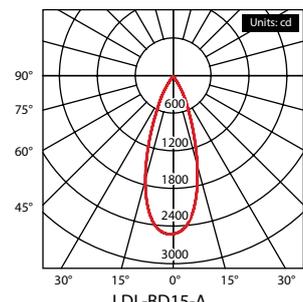
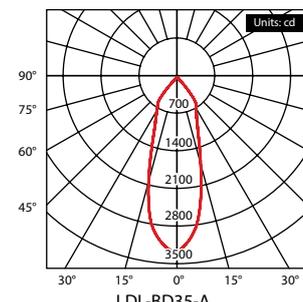
Available in a wide range of wattages and hole cut sizes to suit your installation needs, the ENSA™ LDL-BD adjustable commercial downlight series delivers energy efficient, dimmable downlights for every application. With focused beam angles across the range, LDL-BD adjustable series downlights provide concentrated light distribution, ideal for key and spot lighting.

Each downlight can be tailored to your specifications, featuring an adjustable housing with 40° of lateral tilt ($\pm 20^\circ$). The series is available in 3000K warm white and 6000K cool white models with an average luminous efficacy of 70lm/W across the range.

- Available in 10W, 12W, 15W, 25W, 35W and 45W models
- Average beam angle of 35°, ideal for spot & key lighting
- Dimmable, energy efficient replacement for halogens
- Rounded, white gimble surround & clear glass diffuser
- Lateral tilt adjustable housing $\pm 20^\circ$ from origin
- Hole cut sizes ranging from $\varnothing 75\text{mm}$ ~ $\varnothing 160\text{mm}$

LDL-BD SERIES | COMMERCIAL DOWNLIGHTS

Series Specifications

Model	LDL-BD10-A	LDL-BD12-A	LDL-BD15-A	LDL-BD25-A	LDL-BD35-A	LDL-BD45-A																																										
Product Image																																																
Series Name	LDL-BD Series: Adjustable Dimmable LED Downlights																																															
Optical																																																
Light Output	700lm	800lm	1050lm	1800lm	2600lm	3200lm																																										
Luminous Efficacy	70lm/W	68lm/W	70lm/W	72lm/W	74lm/W	71lm/W																																										
Colour Temperature	3000K / 6000K																																															
Colour Rendering Index	> 80																																															
Beam Angle	30°	35°	35°	35°	35°	45°																																										
Light Decay	< 30% at 10,000 hours																																															
Rated Lifespan	>35,000 hours																																															
Electrical																																																
Power Consumption	10W	12W	15W	25W	35W	45W																																										
Input Voltage	100 ~ 240VAC																																															
Power Factor	> 0.9																																															
Dimmable	Yes																																															
General																																																
Plug / Socket / Base	3-pin AC plug with external driver																																															
Reflector / Diffuser	Clear diffuser																																															
Housing Adjustments	-20° ~ +20° Lateral tilt																																															
Operating Environment	-20 ~ +40°C																																															
Dimensions	Ø95 x 81 mm	Ø110 x 88mm	Ø119 x 103mm	Ø142 x 118mm	Ø180 x 129mm	Ø193 x 129mm																																										
Hole Cut Size	Ø75mm	Ø80mm	Ø90mm	Ø110mm	Ø145mm	Ø160mm																																										
Photometry																																																
Illuminance at a Distance	 <p>Centre Beam Avg (lx) Beam Diameter (m)</p> <table border="1"> <tr><td>1m</td><td>1598</td><td>0.59</td></tr> <tr><td>2m</td><td>399</td><td>1.19</td></tr> <tr><td>3m</td><td>177</td><td>1.78</td></tr> <tr><td>4m</td><td>99</td><td>2.37</td></tr> <tr><td>5m</td><td>64</td><td>2.97</td></tr> </table> <p>LDL-BD10-A</p>	1m	1598	0.59	2m	399	1.19	3m	177	1.78	4m	99	2.37	5m	64	2.97	 <p>Centre Beam Avg (lx) Beam Diameter (m)</p> <table border="1"> <tr><td>1m</td><td>2620</td><td>0.62</td></tr> <tr><td>2m</td><td>655</td><td>1.25</td></tr> <tr><td>3m</td><td>291</td><td>1.87</td></tr> <tr><td>4m</td><td>164</td><td>2.49</td></tr> <tr><td>5m</td><td>105</td><td>3.12</td></tr> </table> <p>LDL-BD15-A</p>	1m	2620	0.62	2m	655	1.25	3m	291	1.87	4m	164	2.49	5m	105	3.12	 <p>Centre Beam Avg (lx) Beam Diameter (m)</p> <table border="1"> <tr><td>1m</td><td>3382</td><td>0.59</td></tr> <tr><td>2m</td><td>845</td><td>1.17</td></tr> <tr><td>3m</td><td>376</td><td>1.75</td></tr> <tr><td>4m</td><td>211</td><td>2.34</td></tr> <tr><td>5m</td><td>136</td><td>3.51</td></tr> </table> <p>LDL-BD35-A</p>	1m	3382	0.59	2m	845	1.17	3m	376	1.75	4m	211	2.34	5m	136	3.51
	1m	1598	0.59																																													
	2m	399	1.19																																													
3m	177	1.78																																														
4m	99	2.37																																														
5m	64	2.97																																														
1m	2620	0.62																																														
2m	655	1.25																																														
3m	291	1.87																																														
4m	164	2.49																																														
5m	105	3.12																																														
1m	3382	0.59																																														
2m	845	1.17																																														
3m	376	1.75																																														
4m	211	2.34																																														
5m	136	3.51																																														
Luminous Light Distribution	 <p>Units: cd</p> <p>LDL-BD10-A</p>	 <p>Units: cd</p> <p>LDL-BD15-A</p>	 <p>Units: cd</p> <p>LDL-BD35-A</p>																																													

Ordering Information

Type	Series	Wattage	Housing Style	Colour Temperature	
LDL	-	BD	-	A (Adjustable)	C (Cool white) W (Warm white)
10 (10W) 12 (12W) 15 (15W) 25 (25W) 35 (35W) 45 (45W)					
LDL-BD45-AW: 45W Dimmable Adjustable LED Downlight in Warm White					



Recessed Adjustable Body LED Downlights

LDL-BC Series: Available in 10W and 12W dimmable models, in two colour temperatures

The ENSA™ LDL-BC series comprises a unique range of downlights, available in standard lens and recessed lens models. Standard lens models offer a concentrated circular light distribution with 60° beam angle. All models are dimmable.

Designed to be discreet, recessed lens models have the lens front positioned away from the light opening. Combined with their 20° narrow beam angle and tilt-adjustable housing, they subtly cast light that is free of glare when viewed from almost all angles. Light openings for recessed models are available in circle and elliptical openings.

- Tilt adjustable LED downlights in 10W and 12W models.
- Dimmable, energy efficient replacement for halogens.
- Lateral tilt adjustable housing $\pm 20^\circ$ from origin.
- Flat-surface, low-profile white gimble (recessed models).
- Simple, stylish bevelled white gimble (standard models).
- Hole cut size: $\varnothing 80\text{mm}$ (10W) and $\varnothing 70\text{mm}$ (12W).

Series Specifications

Model	LDL-BC10-A1	LDL-BC10-A2	LDL-BC12-A																																				
Product Image																																							
Series Name	LDL-BC Deep-Recessed Adjustable Dimmable LED Downlights		LDL-BC Adjustable Dimmable LED Downlights																																				
Optical																																							
Light Output	650lm		900lm																																				
Luminous Efficacy	65lm/W		75lm/W																																				
Colour Temperature	3000K / 6000K																																						
Colour Rendering Index	> 80																																						
Beam Angle	20°		60°																																				
Light Decay	< 30% at 10,000 hours																																						
Rated Lifespan	>35,000 hours																																						
Electrical																																							
Power Consumption	10W		12W																																				
Input Voltage	100 ~ 240VAC																																						
Power Factor	> 0.9																																						
Dimmable	Yes																																						
General																																							
Plug / Socket / Base	3-pin AC plug with external driver																																						
Reflector / Diffuser	Ellipse shape; deep recessed 'invisible' lens	Circle shape; deep recessed 'invisible' lens	Clear lens/diffuser																																				
Housing Adjustments	-20° ~ +20° Lateral Tilt																																						
Operating Environment	-20 ~ +40°C																																						
Dimensions	Ø92 x 92mm		Ø100 x 90mm																																				
Hole Cut Size	Ø80mm		Ø70mm																																				
Photometry																																							
Illuminance at a Distance	<table border="1"> <thead> <tr> <th>Centre Beam Avg (lx)</th> <th>Beam Diameter (m)</th> </tr> </thead> <tbody> <tr><td>963</td><td>0.58</td></tr> <tr><td>241</td><td>1.16</td></tr> <tr><td>107</td><td>1.73</td></tr> <tr><td>60</td><td>2.31</td></tr> <tr><td>39</td><td>2.89</td></tr> </tbody> </table>	Centre Beam Avg (lx)	Beam Diameter (m)	963	0.58	241	1.16	107	1.73	60	2.31	39	2.89	<table border="1"> <thead> <tr> <th>Centre Beam Avg (lx)</th> <th>Beam Diameter (m)</th> </tr> </thead> <tbody> <tr><td>948</td><td>0.58</td></tr> <tr><td>237</td><td>1.16</td></tr> <tr><td>105</td><td>1.74</td></tr> <tr><td>59</td><td>2.32</td></tr> <tr><td>38</td><td>2.90</td></tr> </tbody> </table>	Centre Beam Avg (lx)	Beam Diameter (m)	948	0.58	237	1.16	105	1.74	59	2.32	38	2.90	<table border="1"> <thead> <tr> <th>Centre Beam Avg (lx)</th> <th>Beam Diameter (m)</th> </tr> </thead> <tbody> <tr><td>824</td><td>1.51</td></tr> <tr><td>189</td><td>3.46</td></tr> <tr><td>77</td><td>5.89</td></tr> <tr><td>25</td><td>7.46</td></tr> <tr><td>11</td><td>10.22</td></tr> </tbody> </table>	Centre Beam Avg (lx)	Beam Diameter (m)	824	1.51	189	3.46	77	5.89	25	7.46	11	10.22
Centre Beam Avg (lx)	Beam Diameter (m)																																						
963	0.58																																						
241	1.16																																						
107	1.73																																						
60	2.31																																						
39	2.89																																						
Centre Beam Avg (lx)	Beam Diameter (m)																																						
948	0.58																																						
237	1.16																																						
105	1.74																																						
59	2.32																																						
38	2.90																																						
Centre Beam Avg (lx)	Beam Diameter (m)																																						
824	1.51																																						
189	3.46																																						
77	5.89																																						
25	7.46																																						
11	10.22																																						
Luminous Light Distribution																																							

Ordering Information

Type	Series	Wattage	Housing Style	Colour Temperature	Other
LDL	- BC	10 (10W) 12 (12W)	- A (Adjustable)	C (Cool white) W (Warm white)	1 ~ 9 (Identifier)
LDL-BC10-AC2: 10W Dimmable Adjustable LED Downlight in Cool White					



Commercial Fixed Body LED Downlights

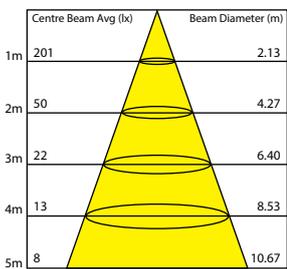
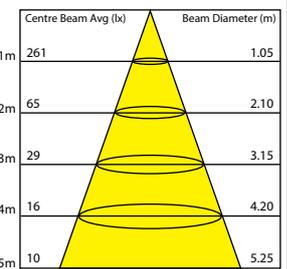
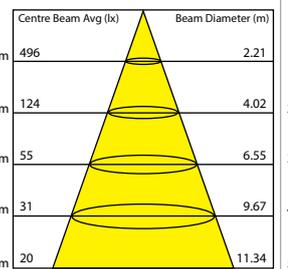
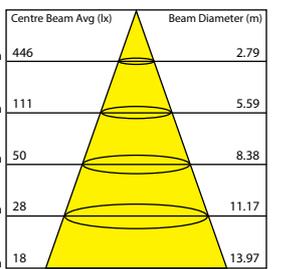
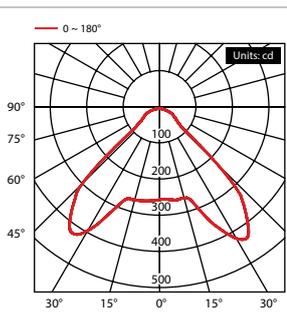
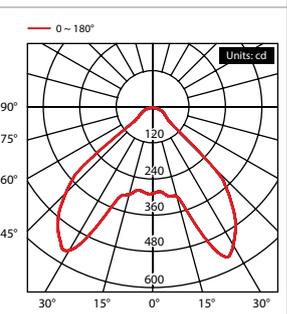
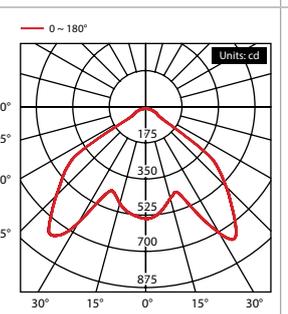
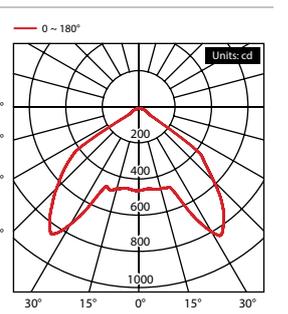
LDL-BD Fixed Series: Available in four dimmable models, in two colour temperatures

Available in a wide range of wattages and hole cut sizes to suit your installation needs, the ENSA™ LDL-BD fixed commercial downlight series delivers energy efficient, dimmable downlights for every application.

LDL-BD fixed series downlights are an affordable, energy efficient upgrade for existing halogen downlights. They are available in a variety of hole cut sizes and beam angles, and come in 3000K warm white and 6000K cool white colour temperatures. Each downlight in the series is dimmable and features a simple and stylish white gimble surround and partially frosted diffuser.

- Available in 9W, 15W, 20W, and 30W models.
- Average luminous efficacy of 74lm/W across the range.
- Dimmable, energy efficient replacement for halogens.
- Recessed, white gimble with partially frosted diffuser.
- Long life LEDs with 35,000 hours rated service life.
- Hole cut sizes ranging from Ø95mm ~ Ø195mm.

Series Specifications

Model	LDL-BD9-F	LDL-BD15-F	LDL-BD20-F	LDL-BD30-F
Product Image				
Series Name	LDL-BD Series: Fixed Dimmable LED Downlights			
Optical				
Light Output	700lm	1100lm	1500lm	2100lm
Luminous Efficacy	78lm/W	74lm/W	75lm/W	70lm/W
Colour Temperature	3000K / 6000K			
Colour Rendering Index	> 80			
Beam Angle	95°	36°	75°	108°
Light Decay	< 30% at 10,000 hours			
Rated Lifespan	>35,000 hours			
Electrical				
Power Consumption	9W	15W	20W	30W
Input Voltage	100 ~ 240VAC			
Power Factor	> 0.9			
Dimmable	Yes			
General				
Plug / Socket / Base	3-pin AC plug with external driver			
Reflector / Diffuser	Partially frosted diffuser			
Housing Adjustments	N/A			
Operating Environment	-20 ~ +40°C			
Dimensions	Ø105 x 48mm	Ø140 x 60mm	Ø190 x 60mm	Ø230 x 72mm
Hole Cut Size	Ø95mm	Ø120mm	Ø165mm	Ø195mm
Photometry				
Illuminance at a Distance				
Luminous Light Distribution				

Ordering Information

Type	Series	Wattage	Housing Style	Colour Temperature		
LDL	-	BD	9 (9W) 15 (15W) 20 (20W) 30 (30W)	-	F (Fixed)	C (Cool white) W (Warm white)
LDL-BD9-FW: 9W Dimmable Fixed LED Downlight in Warm White						



Ultra Thin & Surface Mount LED Downlights

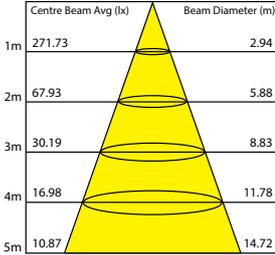
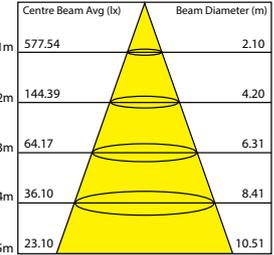
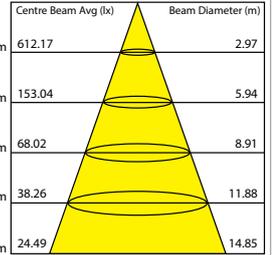
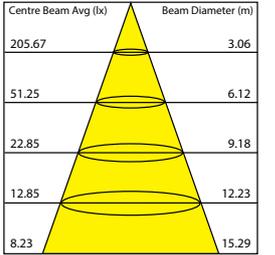
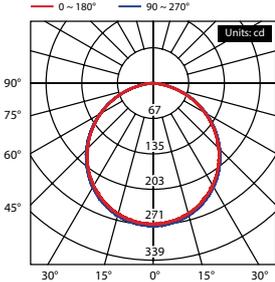
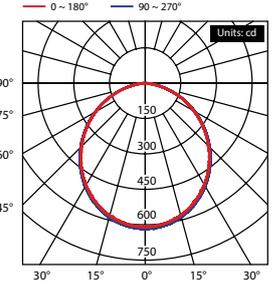
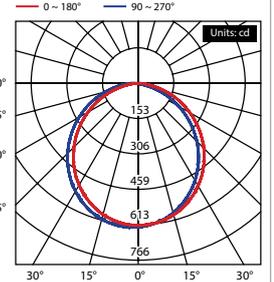
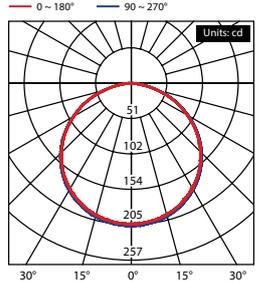
LDL-D Series: Available 12W, 18W and 24W models, in two colour temperatures

The ENSA™ LDL-D Series features ultra thin LED downlights in two distinct housing styles. Available in surface mount or ultra-thin recessed mount, LDL-D Series downlights offer stylish & efficient general purpose lighting in warm and cool white colour temperatures.

With a profile of as little as 15mm, ultra-thin housing downlights (LDL-DT) can be installed in tight wall or ceiling cavities. Surface mount models (LDL-DS) offer an elegant lighting fixture with a simple U-bracket for easy installation.

- Available in ultra-thin recessed & surface mount designs.
- 70lm/W LED performance, available in 3000K & 6000K.
- Frosted diffuser for low-glare, pleasing LED lighting.
- >80 colour rendering & 35,000 hours rated LED lifespan.
- Variety of hole cut sizes: Ø155mm, Ø205mm, Ø280mm.
- Includes mounting kits with screws & wall plugs.

Series Specifications

Model	LDL-DT12	LDL-DT18	LDL-DT24	LDL-DS12																																																																								
Product Image																																																																												
Series Name	LDL-D Series: Ultra Thin & Surface Mount LED Downlights																																																																											
Optical																																																																												
Light Output	840lm	1260lm	1680lm	840lm																																																																								
Luminous Efficacy	70lm/W																																																																											
Colour Temperature	3000K / 6000K																																																																											
Colour Rendering Index	> 80																																																																											
Beam Angle	110°																																																																											
Rated Lifespan	>35,000 hours																																																																											
Electrical																																																																												
Power Consumption	12W	18W	24W	12W																																																																								
Input Voltage	85-265VAC																																																																											
Power Factor	> 0.5																																																																											
Dimmable	No																																																																											
General																																																																												
Plug / Socket / Base	No plug, external driver																																																																											
Reflector / Diffuser	Frosted diffuser																																																																											
Housing Adjustments	N/A																																																																											
Operating Environment	-30 ~ +50°C																																																																											
Dimensions	Ø170 x 15mm	Ø225 x 20mm	Ø300 x 20mm	Ø170 x 35mm																																																																								
Hole Cut Size	Ø155mm	Ø205mm	Ø280mm	N/A																																																																								
Photometry																																																																												
Illuminance at a Distance	 <table border="1"> <thead> <tr> <th>Distance (m)</th> <th>Centre Beam Avg (lx)</th> <th>Beam Diameter (m)</th> </tr> </thead> <tbody> <tr><td>1m</td><td>271.73</td><td>2.94</td></tr> <tr><td>2m</td><td>67.93</td><td>5.88</td></tr> <tr><td>3m</td><td>30.19</td><td>8.83</td></tr> <tr><td>4m</td><td>16.98</td><td>11.78</td></tr> <tr><td>5m</td><td>10.87</td><td>14.72</td></tr> </tbody> </table>	Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)	1m	271.73	2.94	2m	67.93	5.88	3m	30.19	8.83	4m	16.98	11.78	5m	10.87	14.72	 <table border="1"> <thead> <tr> <th>Distance (m)</th> <th>Centre Beam Avg (lx)</th> <th>Beam Diameter (m)</th> </tr> </thead> <tbody> <tr><td>1m</td><td>577.54</td><td>2.10</td></tr> <tr><td>2m</td><td>144.39</td><td>4.20</td></tr> <tr><td>3m</td><td>64.17</td><td>6.31</td></tr> <tr><td>4m</td><td>36.10</td><td>8.41</td></tr> <tr><td>5m</td><td>23.10</td><td>10.51</td></tr> </tbody> </table>	Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)	1m	577.54	2.10	2m	144.39	4.20	3m	64.17	6.31	4m	36.10	8.41	5m	23.10	10.51	 <table border="1"> <thead> <tr> <th>Distance (m)</th> <th>Centre Beam Avg (lx)</th> <th>Beam Diameter (m)</th> </tr> </thead> <tbody> <tr><td>1m</td><td>612.17</td><td>2.97</td></tr> <tr><td>2m</td><td>153.04</td><td>5.94</td></tr> <tr><td>3m</td><td>68.02</td><td>8.91</td></tr> <tr><td>4m</td><td>38.26</td><td>11.88</td></tr> <tr><td>5m</td><td>24.49</td><td>14.85</td></tr> </tbody> </table>	Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)	1m	612.17	2.97	2m	153.04	5.94	3m	68.02	8.91	4m	38.26	11.88	5m	24.49	14.85	 <table border="1"> <thead> <tr> <th>Distance (m)</th> <th>Centre Beam Avg (lx)</th> <th>Beam Diameter (m)</th> </tr> </thead> <tbody> <tr><td>1m</td><td>205.67</td><td>3.06</td></tr> <tr><td>2m</td><td>51.25</td><td>6.12</td></tr> <tr><td>3m</td><td>22.85</td><td>9.18</td></tr> <tr><td>4m</td><td>12.85</td><td>12.23</td></tr> <tr><td>5m</td><td>8.23</td><td>15.29</td></tr> </tbody> </table>	Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)	1m	205.67	3.06	2m	51.25	6.12	3m	22.85	9.18	4m	12.85	12.23	5m	8.23	15.29
Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)																																																																										
1m	271.73	2.94																																																																										
2m	67.93	5.88																																																																										
3m	30.19	8.83																																																																										
4m	16.98	11.78																																																																										
5m	10.87	14.72																																																																										
Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)																																																																										
1m	577.54	2.10																																																																										
2m	144.39	4.20																																																																										
3m	64.17	6.31																																																																										
4m	36.10	8.41																																																																										
5m	23.10	10.51																																																																										
Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)																																																																										
1m	612.17	2.97																																																																										
2m	153.04	5.94																																																																										
3m	68.02	8.91																																																																										
4m	38.26	11.88																																																																										
5m	24.49	14.85																																																																										
Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)																																																																										
1m	205.67	3.06																																																																										
2m	51.25	6.12																																																																										
3m	22.85	9.18																																																																										
4m	12.85	12.23																																																																										
5m	8.23	15.29																																																																										
Luminous Light Distribution																																																																												

Ordering Information

Type	Series	Housing	Wattage	Colour Temperature	
LDL	-	D	T (Ultra Thin)	12 (12W) 18 (18W) 24 (24W)	W (Warm white) C (Cool white)
			S (Surface)	12 (12W)	W (Warm white) C (Cool white)
LDL-DT24-W: 24W Ultra Thin Downlight in Warm White					



Commercial Fixed Body LED Cabinet Lights

LDL-BA Series: Available in two styles and two colour temperatures

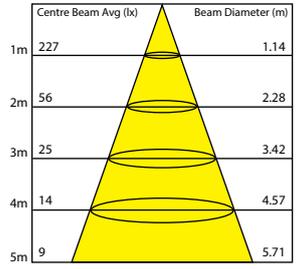
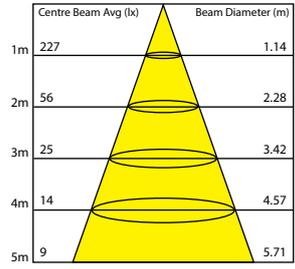
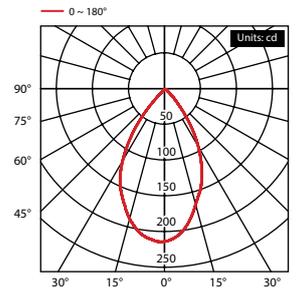
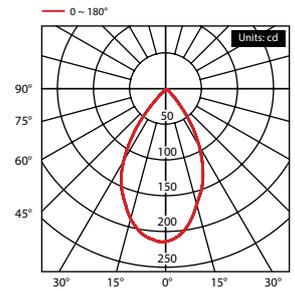
The commercial fixed LED cabinet light range from ENSA™ comprises small and efficient LED fixtures available in two styles and hole cut sizes to suit your installation needs.

The LDL-BA series features uniquely packaged LED cabinet lights, with six individual lights operating on a single transformer. This makes them ideal in showrooms and stores for shelf and display case illumination. They are available in square or round design, in cool and warm white colour temperatures.

- Set of six dimmable LED cabinet lights with single driver.
- Spot 45° beam angle for concentrated light distribution.
- 200lm light output, equivalent to 15W halogen.
- Ideal energy efficient lighting replacement for halogens.
- Long life LEDs: minimum 35,000 hours rated service life.
- Hole cut sizes ranging from Ø28mm ~ Ø38mm.

LDL-BA SERIES | COMMERCIAL DOWNLIGHTS

Series Specifications

Model	LDL-BA3-F1	LDL-BA3-F2																								
Product Image																										
Series Name	LDL-BA Series: LED Cabinet Lights																									
Optical																										
Light Output	200lm																									
Luminous Efficacy	67lm/W																									
Colour Temperature	3000K / 6000K																									
Colour Rendering Index	> 80																									
Beam Angle	45°																									
Light Decay	< 3% at 6,000 hours																									
Rated Lifespan	>35,000 hours																									
Electrical																										
Power Consumption	3W per light (6 pcs total)																									
Input Voltage	100 ~ 240VAC																									
Power Factor	> 0.9																									
Dimmable	Yes																									
General																										
Plug / Socket / Base	3-pin AC plug with external driver																									
Reflector / Diffuser	Clear reflector lens																									
Housing Adjustments	N/A																									
Operating Environment	-20 ~ +40°C																									
Dimensions	Ø44 x 42mm	Ø50 x 38mm																								
Hole Cut Size	Ø28mm	Ø38mm																								
Photometry																										
Illuminance at a Distance	 <table border="1"> <thead> <tr> <th>Centre Beam Avg (lx)</th> <th>Beam Diameter (m)</th> </tr> </thead> <tbody> <tr><td>227</td><td>1.14</td></tr> <tr><td>56</td><td>2.28</td></tr> <tr><td>25</td><td>3.42</td></tr> <tr><td>14</td><td>4.57</td></tr> <tr><td>9</td><td>5.71</td></tr> </tbody> </table>	Centre Beam Avg (lx)	Beam Diameter (m)	227	1.14	56	2.28	25	3.42	14	4.57	9	5.71	 <table border="1"> <thead> <tr> <th>Centre Beam Avg (lx)</th> <th>Beam Diameter (m)</th> </tr> </thead> <tbody> <tr><td>227</td><td>1.14</td></tr> <tr><td>56</td><td>2.28</td></tr> <tr><td>25</td><td>3.42</td></tr> <tr><td>14</td><td>4.57</td></tr> <tr><td>9</td><td>5.71</td></tr> </tbody> </table>	Centre Beam Avg (lx)	Beam Diameter (m)	227	1.14	56	2.28	25	3.42	14	4.57	9	5.71
Centre Beam Avg (lx)	Beam Diameter (m)																									
227	1.14																									
56	2.28																									
25	3.42																									
14	4.57																									
9	5.71																									
Centre Beam Avg (lx)	Beam Diameter (m)																									
227	1.14																									
56	2.28																									
25	3.42																									
14	4.57																									
9	5.71																									
Luminous Light Distribution																										

Ordering Information

Type	Series	Wattage	Housing Style	Colour Temperature	Other
LDL	- BA	3 (3W)	- F (Fixed)	C (Cool white) W (Warm white)	1~2 (Identifier)
LDL-BA3-FW1: 3W Dimmable Fixed LED Downlight in Warm White					



Residential Fixed Body LED Downlights

LDL-BB Series: Variety of styles and wattages, in multiple colour temperatures

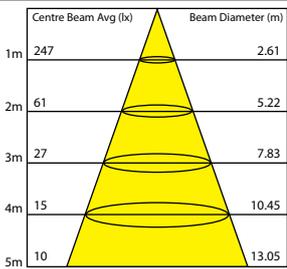
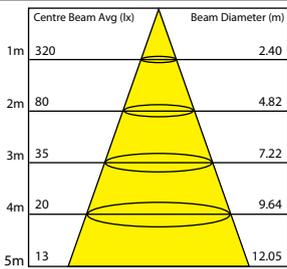
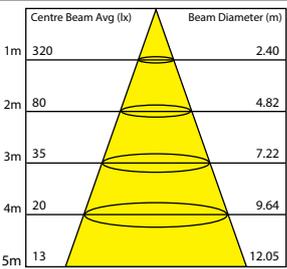
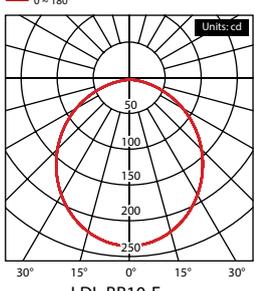
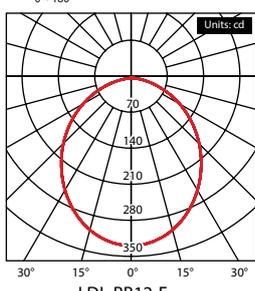
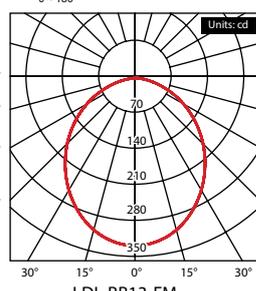
The residential fixed LED downlight range from ENSA™ comprises small and efficient LED fixtures in variety of styles, wattages and hole cut sizes to suit your installation needs.

LDL-BB series downlights are small form factor LED fixtures available in flat and bevelled gimble styles, in cool and warm white colour temperatures. The LDL-BB13-FM downlights feature both warm and cool white LEDs which allows you to cycle through three colour temperatures - warm white (3000K), natural white (4500K) and cool white (6000K).

- LDL-BB series: Bevelled or flat style dimmable downlights
- LDL-BB13-FM series: 3 switchable colour temperatures
- Also available: option for integrated driver models
- Ideal energy efficient lighting replacement for halogens
- Long life LEDs: minimum 30,000 hours rated service life
- Hole cut sizes ranging from Ø75mm ~ Ø150mm

LDL-BB/A SERIES | COMMERCIAL DOWNLIGHTS

Series Specifications

Model	LDL-BB10-F	LDL-BB10-F2	LDL-BB12-F	LDL-BB13-FM
Product Image				
Series Name	LDL-BB Series Dimmable LED Downlights			
Optical				
Light Output	700lm	800lm	850lm	845lm
Luminous Efficacy	70lm/W	80lm/W	71lm/W	65lm/W
Colour Temperature	3000K / 6000K			Switchable (x3)
Colour Rendering Index	> 80			> 75
Beam Angle	120°	120°	95°	100°
Light Decay	< 3% at 6,000 hours	< 30% at 10,000 hours	< 3% at 6,000 hours	< 10% at 10,000 hours
Rated Lifespan	>35,000 hours		> 30,000 hours	
Electrical				
Power Consumption	10W	10W	12W	13W
Input Voltage	100 ~ 240VAC			
Power Factor	> 0.9			
Dimmable	Yes			Yes (TRIAC)
General				
Plug / Socket / Base	3-pin AC plug with external driver			
Reflector / Diffuser	Frosted diffuser			
Housing Adjustments	N/A			
Operating Environment	-20 ~ +40°C			
Dimensions	Ø90 x 45mm	Ø115 x 58mm	Ø110 x 50mm	Ø110 x 50mm
Hole Cut Size	Ø75mm	Ø90mm	Ø90mm	Ø90mm
Photometry				
Illuminance at a Distance				
	LDL-BB10-F	LDL-BB12-F	LDL-BB13-FM	
				
Luminous Light Distribution	LDL-BB10-F	LDL-BB12-F	LDL-BB13-FM	

Ordering Information

Type	Series	Wattage	Housing Style	Colour Temperature
LDL	-	10 (10W) 12 (12W) 13 (13W)	-	F (Fixed) C (Cool white) W (Warm white) M (Multi-coloured)
				1~9 (Identifier)

LDL-BB10-FW: 10W Dimmable Fixed LED Downlight in Warm White



LED Retrofit Bulb Lighting

LBL-B Series: Available in a variety of styles and wattages, in two colour temperatures

Available in a variety of base fixtures, input voltages, wattages and colour temperatures, the LBL series of LED retrofit bulbs provides an easy path to energy efficient, long life LED illumination. They are available in G4, G9, and E14 bases.

LBL-BA series G4 and LBL-BB series G9 base lights are ideal replacements for halogen lamps and are used in cabinet lights, designer fittings, RV & caravan lamps, in bathrooms & kitchens and more. The LBL-BC series E14 base lights replace small fittings such as those found in appliance lighting.

- Replacement bulbs for a wide range of base fixtures
- Improve energy efficiency & save on relamping costs
- Available in 3000K warm and 6000K cool white
- Small form factor G4, G9 and E14 base fittings
- 30,000 hours rated service life and high colour accuracy
- Power flexible: Includes 12VDC and 240VAC input models

Series Specifications

Model	LBL-BA3-1	LBL-BA3-2	LBL-BA3-3	LBL-BA2
Product Image				
Series Name	LBL-BA Series G4 Base LED Bulbs			
Optical				
Light Output	200lm	200lm	300lm	140lm
Luminous Efficacy	67lm/W	67lm/W	100lm/W	70lm/W
Colour Temperature	3000K / 6000K			
Colour Rendering Index	>80			
Beam Angle	360°			180°
Light Decay	<15% at 10,000 hours			
Rated Lifespan	30,000 hours			
Electrical				
Power Consumption	3W		2W	
Input Voltage	12VDC	240VAC	12VDC	12VDC
Power Factor	>0.4	>0.4	>0.4	>0.4
Dimmable	N/A			
General				
Construction / Material	Silicon base		Ceramic base	Plastic base
Plug / Socket / Base	G4 bi-pin			
Operating Environment	-20 ~ +40°C			
Dimensions	Ø15 x 43mm	Ø16 x 43mm	Ø15 x 44mm	20 x 30mm

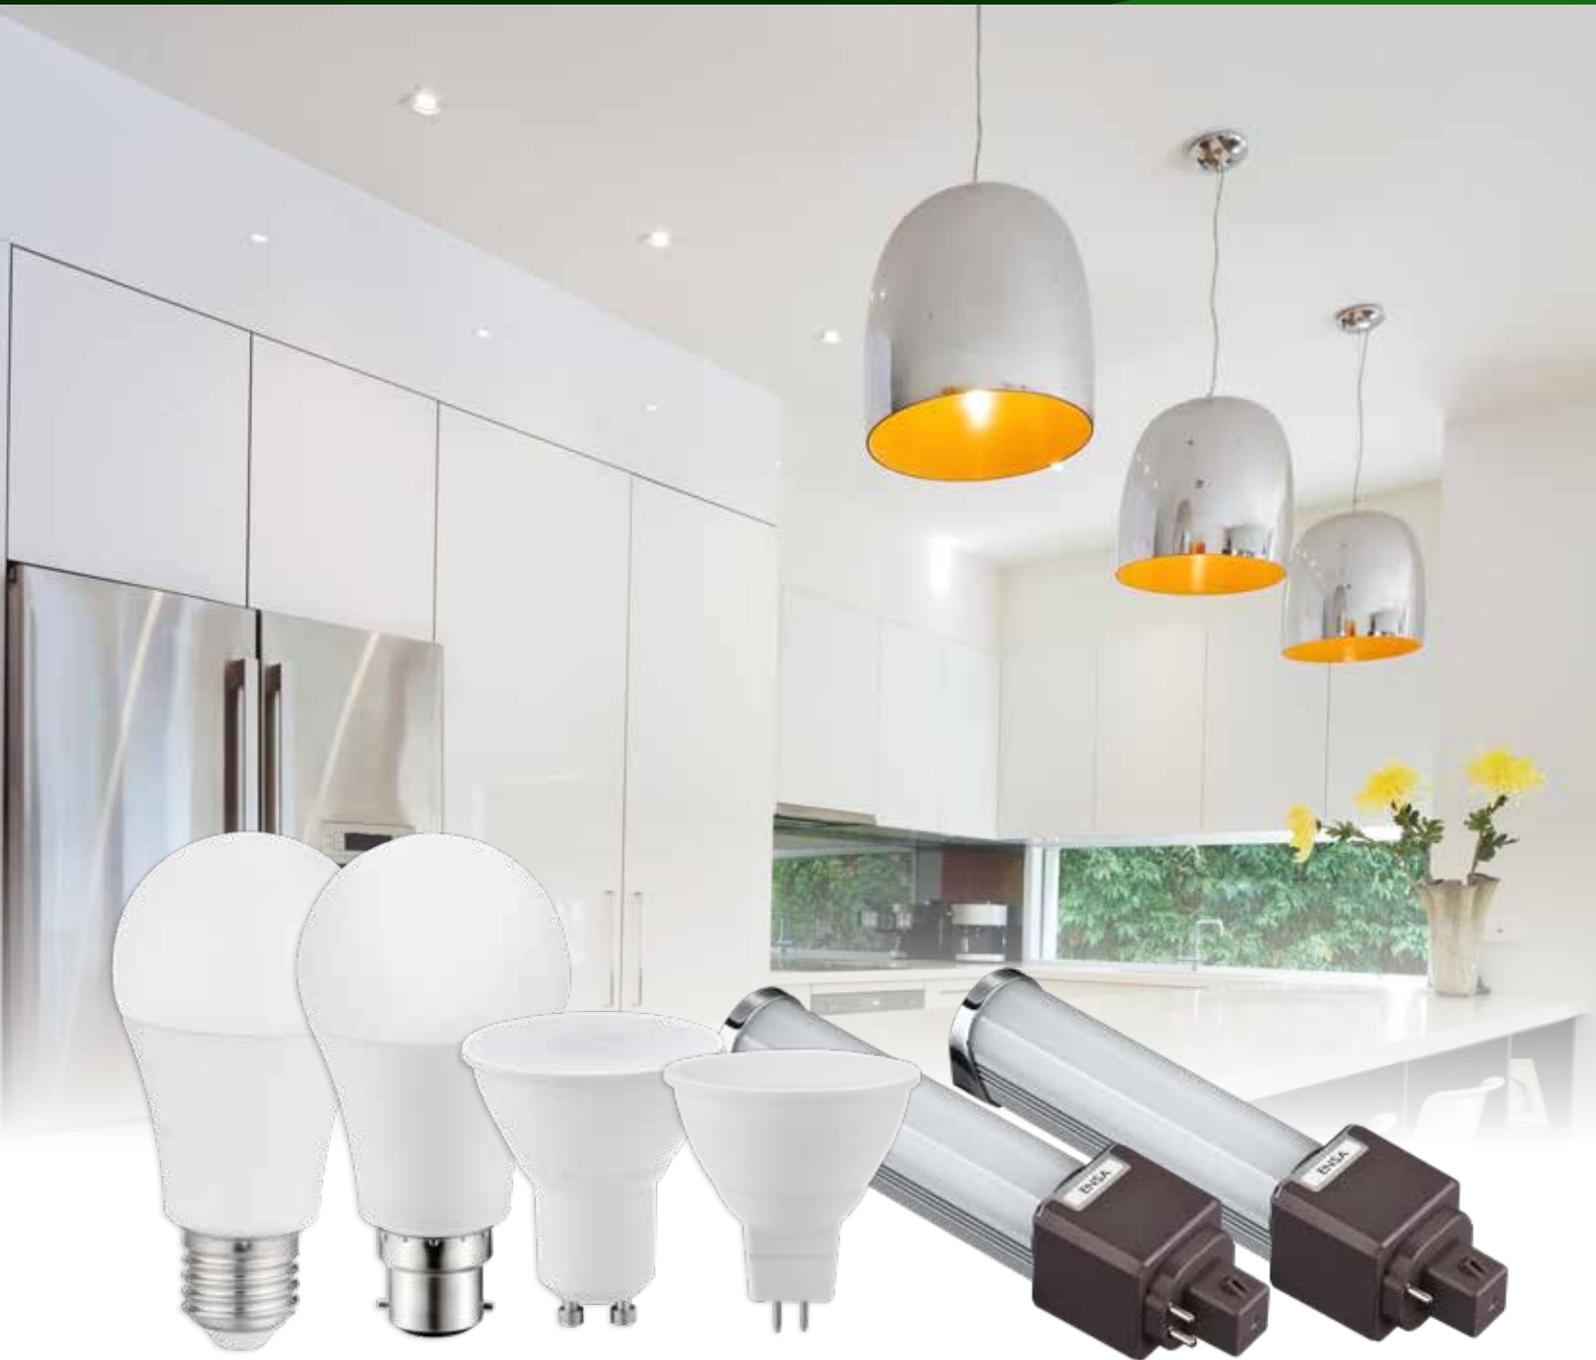
Model	LBL-BB5-1	LBL-BB5-2
Product Image		
Series Name	LBL-BB Series G9 Base LED Bulbs	
Optical		
Light Output	360lm	550lm
Luminous Efficacy	65lm/W	100lm/W
Colour Temperature	3000K / 6000K	
Colour Rendering Index	>80	
Beam Angle	360°	
Light Decay	<15% at 10,000 hours	
Rated Lifespan	30,000 hours	
Electrical		
Power Consumption	5.5W	
Input Voltage	240VAC	240VAC
Power Factor	>0.6	>0.5
Dimmable	N/A	
General		
Construction / Material	Silicon base	Ceramic base
Plug / Socket / Base	G9 bi-pin	
Operating Environment	-20 ~ +40°C	
Dimensions	Ø17 x 61mm	Ø15 x 60mm

Model	LBL-BC1
Product Image	
Series Name	LBL-BC Series E14 Base Retrofit Bulbs
Optical	
Light Output	120lm
Luminous Efficacy	80lm/W
Colour Temperature	3000K / 6000K
Colour Rendering Index	>80
Beam Angle	360°
Light Decay	<15% at 10,000 hours
Rated Lifespan	30,000 hours
Electrical	
Power Consumption	1.5W
Input Voltage	220 ~ 240VAC
Power Factor	>0.80
Dimmable	N/A
General	
Construction / Material	Glass / Ceramic
Plug / Socket / Base	E14 screw
Operating Environment	-20 ~ +40°C
Dimensions	Ø23 x 50mm

Ordering Information

Type	Series	Wattage	Colour Temperature	Style		
LBL	-	BA	1 (1.5W)	-	C (Cool white) W (Warm white)	1~9
		BB	2 (2W)			
		BC	3 (3W)			
			5 (5.5W)			

LBL-BA3-W2: 3W G4 Base LED Retrofit Bulb in Warm White



LED Retrofit Globe Lighting

LEDBL / GL Series: Variety of wattages in E27, B22, GU10, GU5.3 and PL G24 style fittings

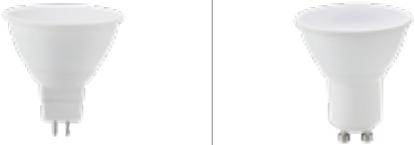
The ENSA™ LED light globe series provides a variety of energy efficient LED bulbs, ideal for replacing shorter-lifespan, higher energy use incandescent, halogen and compact fluorescent bulbs. They are a perfect lighting solution for general purpose illumination.

Each ENSA™ LED light globe features a frosted diffuser to remove harsh LED glare, is available in cool & warm white temperatures and comes with a 10 year return-to-base warranty (excludes PL G24 lights, visit www.ensalife.com for full warranty terms)

This series is available in a variety of wattages and base fittings to handle all types of lighting upgrades. Form factors include standard light bulb replacements available in E27 screw base and B22 bayonet fitting; MR16 downlight bulb replacements in GU5.3 12V bi-pin fitting and GU10 240V bayonet fitting; and PL style fluorescent replacements in 2-pin & 4-pin variations.

Series Specifications

Model	LEDBL6WE27	LBL-C9-E27	LEDBL11WE27	LEDBL6WB22	LBL-D7-B22	LEDBL9WB22	LEDBL11WB22
Product Image							
Series Name	E27 Screw LED Globe Series			B22 Bayonet LED Globe Series			
Optical							
Light Output	485lm	806lm	1025lm	485lm	630lm	795lm	1025lm
Luminous Efficacy	75lm/W	80lm/W	93lm/W	75lm/W	85lm/W	84lm/W	93lm/W
Colour Temperature	3000K / 6500K			3000K / 6500K		3000K / 6500K	
Colour Rendering Index	>80						
Beam Angle	160°						
Light Decay	<10% at 6,000 hours	<7% at 6,000 hours	<10% at 6,000 hours	<10% at 6,000 hours	<20% at 6,000 hours	<10% at 6,000 hours	<10% at 6,000 hours
Rated Lifespan	30,000 hours	25,000 hours	30,000 hours	30,000 hours	15,000 hours	30,000 hours	30,000 hours
Electrical							
Power Consumption	6.5W	9.5W	11W	6.5W	7W	9.5W	11W
Input Voltage	220 ~ 240VAC						
Power Factor	>0.5						
Dimmable	N/A						
General							
Construction / Material	Aluminium & plastic						
Plug / Socket / Base	E27			B22			
Operating Environment	-25° ~ +40°C	-40° ~ +45°C	-25° ~ +40°C	-20° ~ +40°C			
Dimensions	Ø60 x 107mm						

Model	LEDGL5WMR	LEDGL5WGU	LEDG24D10W	LEDG24Q10W
Product Image				
Series Name	MR16 LED Downlight Series		G24 LED PL Light Series	
Optical				
Light Output	410lm		960lm	
Luminous Efficacy	75lm/W		>90lm/W	
Colour Temperature	3000K / 6500K		3000K / 5500K	
Colour Rendering Index	>80		>80	
Beam Angle	105°		145°	
Light Decay	<10% after 6,000 hours		<15% after 20,000 hours	
Rated Lifespan	30,000 hours		32,000 hours	
Electrical				
Power Consumption	5.5W		10W	
Input Voltage	12VDC	220 ~ 240VAC	85 ~ 265VAC	
Power Factor	>0.5		>0.9	
Dimmable	N/A		N/A	
General				
Construction / Material	Aluminium & polycarbonate			
Plug / Socket / Base	GU5.3	GU10	G24D 2-pin / 180° rotatable base	G24Q 4-pin / 180° rotatable base
Operating Environment	-25° ~ +40°C		-20° ~ 65°C / 80%RH (max)	
Dimensions	Ø51 x 50mm	Ø56 x 50mm	35 x 35 x 181mm	

Ordering Information

Type	Wattage	Base Fitting	Colour Temperature
LEDBL	6W (6.5W) 11W (11W)	E27 (E27 Screw) B22 (B22 Bayonet)	3K (Warm white) 65K (Cool white)
LEDGL	5W (5.5W)	GU (GU10 Bayonet) MR (GU5.3 Bi-pin)	3K (Warm white) 65K (Cool white)

LEDBL6WE2765K: 6.5W LED Globe with E27 Base in Cool White

Type	Series	Wattage	Base Fitting	Colour Temperature
LBL	-	C 9 (9.5W)	- E27 (E27 Screw)	C (Cool white) W (Warm white)

LBL-C9-E27C: 9.5W LED Globe with E27 Base in Cool White

Type	Base Fitting	Wattage	Colour Temperature
LEDG24	D (2-pin) Q (4-pin)	10W (10W)	3K (Warm white) 5K (Cool white)

LEDG24Q10W3K: 10W LED PL Light with 4-pin Base in Warm White



LED Retrofit High Bay Lighting

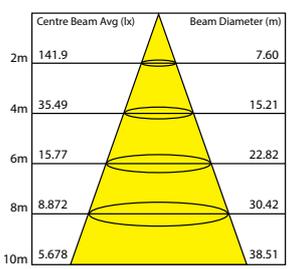
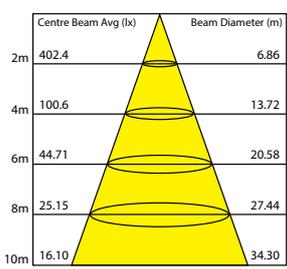
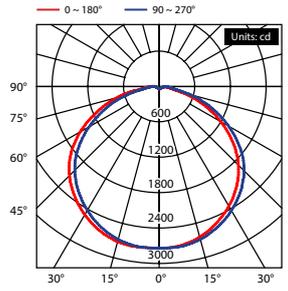
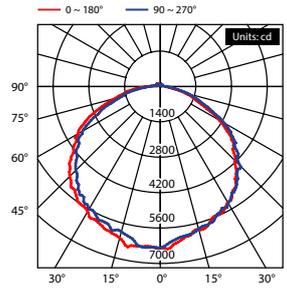
LBL-D Series: Retrofit E40 screw high bay LED bulbs available in 100W and 160W models

The ENSA™ LBL-D series enables rapid, energy efficient lighting upgrades of retail high bay installations in industrial and commercial environments. Quickly and easily replace E40 screw base lamps and save time on replacement with minimal interruption to operations.

The LBL-D series offers a far greater lifespan and energy efficiency than traditional metal halide lighting, saving on energy and lighting replacement costs. Available in 100W & 160W models in cool & natural white colour temperatures.

- High power bulb for industrial and commercial settings
- Improve energy efficiency & save on re-lamping costs
- E40 screw based for retrofit lighting installations
- Long life LEDs: minimum 25,000 hours rated service life
- Available in natural and cool white colour temperatures
- Reflector for high ceiling installations (*sold separately*)

Series Specifications

Model	LBL-D100-E40	LBL-D160-E40																																				
Product Image																																						
Series Name	LBL-D Series: Retrofit High Bay LED Bulb																																					
Optical																																						
Light Output	9,000lm	20,000lm																																				
Luminous Efficacy	90lm/W	125lm/W																																				
Colour Temperature	4000K / 6500K																																					
Colour Rendering Index	> 80																																					
Beam Angle	120°	200°																																				
Light Decay	<80% at 6000 hours																																					
Rated Lifespan	>25,000 hours																																					
Electrical																																						
Power Consumption	100W	160W																																				
Input Voltage	220 ~ 240VAC, 50Hz																																					
Power Factor	> 0.9																																					
Dimmable	No																																					
General																																						
Construction / Material	Polybutylene Terephthalate (body) / Polycarbonate (lens)																																					
Plug / Socket / Base	E40 screw																																					
Operating Environment	-30 ~ +50°C																																					
Dimensions	Ø190 x 275mm	Ø280 x 350mm																																				
Photometry																																						
Illuminance at a Distance	 <table border="1"> <caption>Photometry Data for LBL-D100-E40</caption> <thead> <tr> <th>Distance (m)</th> <th>Centre Beam Avg (lx)</th> <th>Beam Diameter (m)</th> </tr> </thead> <tbody> <tr><td>2m</td><td>141.9</td><td>7.60</td></tr> <tr><td>4m</td><td>35.49</td><td>15.21</td></tr> <tr><td>6m</td><td>15.77</td><td>22.82</td></tr> <tr><td>8m</td><td>8.872</td><td>30.42</td></tr> <tr><td>10m</td><td>5.678</td><td>38.51</td></tr> </tbody> </table>	Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)	2m	141.9	7.60	4m	35.49	15.21	6m	15.77	22.82	8m	8.872	30.42	10m	5.678	38.51	 <table border="1"> <caption>Photometry Data for LBL-D160-E40</caption> <thead> <tr> <th>Distance (m)</th> <th>Centre Beam Avg (lx)</th> <th>Beam Diameter (m)</th> </tr> </thead> <tbody> <tr><td>2m</td><td>402.4</td><td>6.86</td></tr> <tr><td>4m</td><td>100.6</td><td>13.72</td></tr> <tr><td>6m</td><td>44.71</td><td>20.58</td></tr> <tr><td>8m</td><td>25.15</td><td>27.44</td></tr> <tr><td>10m</td><td>16.10</td><td>34.30</td></tr> </tbody> </table>	Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)	2m	402.4	6.86	4m	100.6	13.72	6m	44.71	20.58	8m	25.15	27.44	10m	16.10	34.30
Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)																																				
2m	141.9	7.60																																				
4m	35.49	15.21																																				
6m	15.77	22.82																																				
8m	8.872	30.42																																				
10m	5.678	38.51																																				
Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)																																				
2m	402.4	6.86																																				
4m	100.6	13.72																																				
6m	44.71	20.58																																				
8m	25.15	27.44																																				
10m	16.10	34.30																																				
Luminous Light Distribution																																						

Ordering Information

Type	Series	Wattage	Base	Colour Temperature	
LBL	-	100 (100W) 160 (160W)	-	E40	C (Cool white) N (Natural white)

LBL-D100-E40N: 100W E40 Base LED Retrofit Bulb in Natural White

Additional Accessories

LBL-D100RF
Optional plastic reflector available for 100W LBL-D Series LED bulbs only. Recommended for high ceiling installations.





LED Retrofit Globe Lighting

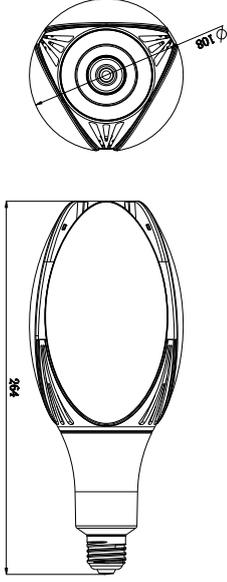
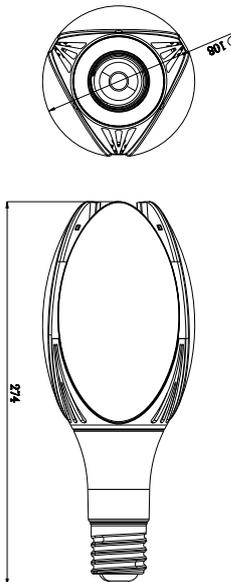
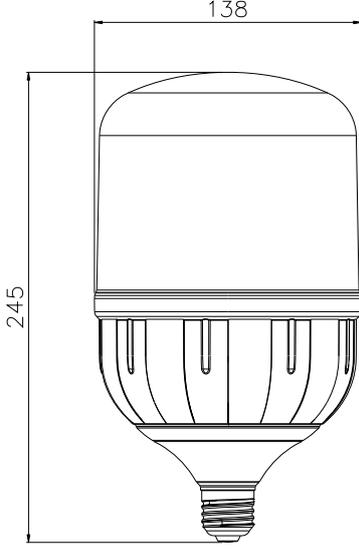
LBL-D Series: Available in 42W and 45W in E27 and E40 screw base fittings.

The ENSA LBL-D Series LED globes deliver rapid energy efficient lighting upgrades without the need to replace entire lighting fixtures. Make lighting upgrades simple with E27 and E40 screw fittings and provide rapid retrofit lighting far more efficiently than traditional compact fluorescent lights.

LBL-D Series retrofit globes are available in two unique designs that fit to traditional light enclosures, making LED upgrades easy. They are ideal across residential, commercial and public spaces and are perfect for general purpose lighting in lamp posts, area lights, gate lamps, architectural lighting, interior lighting and more.

- Improve energy efficiency with up to 120lm/W bulbs
- Low-glare and durable frosted polycarbonate lens
- Available in 4000K natural white colour temperature
- Great lumen maintenance & lifespan up to 25,000 hours
- Two common bulb styles for traditional light enclosures
- Standard E27 and E40 screw fit bulbs; optional converter

Series Specifications

Model	LBL-D42-E27	LBL-D42-E40	LBL-D45-E27
Product Image			
Series Name	LBL-D Series Retrofit Light Globes		
Optical			
Light Output	5000lm		4500lm
Luminous Efficacy	120lm/W		100lm/W
Colour Temperature	4000K		
Colour Rendering Index	>80		
Beam Angle	330°		180°
Light Decay	<70% after 25,000 hours		<80% after 6000 hours
Rated Lifespan	25,000 hours		
Electrical			
Power Consumption	42W		45W
Input Voltage	220 ~ 240VAC 50Hz		
Power Factor	>0.9		
Dimmable	N/A		
General			
Construction / Material	Polyamide body, polycarbonate frosted lens		
Ingress Protection	IP20		
Plug / Socket / Base	E27	E40	E27
Operating Environment	-20 ~ +40°C		
Dimensions	Ø108 x 264mm	Ø108 x 274mm	Ø138 x 245mm
Diagram			

Ordering Information

Type	Wattage	Base Fitting	Colour Temperature
LBL-D	42 (42W)	E27 (E27 Screw)	N (Natural white)
	45 (45W)	E40 (E40 Screw)	

LBL-D42-E27 / E40 : 42W LED Globe with E27 / E40 Base in Natural White
 LBL-D45-E27: 45W LED Globe with E27 Base in Natural White



Type	Base Fitting
E27-E40BASE	E40 (E40 Screw)

E27-E40BASE: E27 transfer into E40 Base Adapter



Intelligent Motion Sensor & Dusk/Dawn Switches

ENSA-MS/PS/LC Series: Microwave motion, PIR motion & light sensors in a variety of styles

The ENSA™ intelligent energy saving switch series comprises a wide range of automated, smart switches that use a variety of different sensors to control light use. This innovative combination of sensors ensures your lights will only turn on when you need them to, saving you on power costs and reducing the impact on the environment.

Each intelligent switch features adjustable light sensing, movement sensing and on-timer delay so you may tailor light use to your exact specifications. The range includes models with 5.8GHz microwave or passive infrared (PIR) for movement sensing.

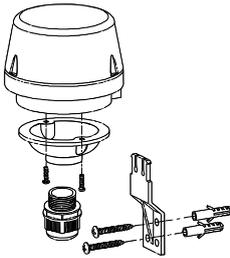
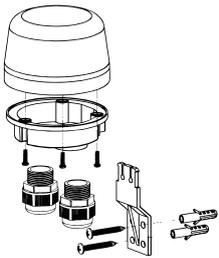
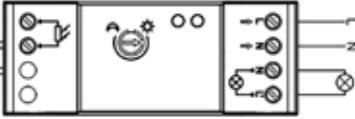
Once installed, the switch's daylight sensor measures ambient light levels. If light levels fall below the set limit, the motion sensor is activated. Upon detecting motion, the switch will turn the connected light on. When movement is no longer detected, the switch's adjustable on-timer delay will keep the light on for a designated period of time. Once this delay has expired, the switch turns the light off automatically.

Sensor Switches | Series Specifications

Model	ENSA-PS1	ENSA-PS2	ENSA-PS3	ENSA-PS4	ENSA-MS1	ENSA-MS2	ENSA-MS6
Product Image							
Daylight Sensor	•	•	•	•	•	•	•
Passive Infrared Sensor	•	•	•				
Microwave Sensor				•	•	•	•
On-timer Delay	•	•	•	•	•	•	•
Electrical							
Input Voltage	220 ~ 240VAC 50Hz						
Power Consumption (Sensing Mode)	0.5W	0.4W	0.5W	0.5W	0.9W	0.9W	0.9W
Max. Rated Load (Resistive/Inductive)	1200W / 300W	2000W / 1000W	800W / 400W	2000W / 1000W	500W / 200W	1200W / 300W	1200W / 300W
Detection Adjustments							
Daylight Sensing	3 ~ 2000 Lux						
Motion Detection Area	180° arc	360° rectangle	360° circle	360° circle	360° circle	360° circle	180° arc
Motion Detection Range	12m	4 x 20m	6m	20m	2 ~ 8m	1 ~ 8m	5 ~ 15m
Motion Detection Speed	0.6 ~ 1.5m/s						
On-timer Delay	10s ~ 7min	10s ~ 30min	10s ~ 15min	10s ~ 30min	5s ~ 10min	10s ~ 12min	3s ~ 12min
General							
Ingress Protection	IP65	IP20	IP20	IP65	Indoor use only	IP20	IP65
Operating Environment	-20 ~ 40°C / <93% Relative humidity						
Mounting Type	Wall/ceiling	Ceiling	Recessed ceiling	Ceiling	Wall/ceiling	Ceiling	Wall/ceiling
Rec. Installation Height	1.8 ~ 2.5m	4 ~ 10m	2.2 ~ 4m	2.2 ~ 6m	1.8 ~ 3.5m	1.5 ~ 3.5m	1.5 ~ 3.5m
Dimensions	80 x 120 x 50mm	100 x 100 x 50mm	Ø50 x 65mm	100 x 100 x 50mm	40 x 60 x 25mm	Ø100 x 40mm	80 x 120 x 50mm

* Sensors switches must be installed by a licensed electrician.

Dusk / Dawn Switches | Series Specifications

Model	ENSA-LC1	ENSA-LC1W	ENSA-LC3
Product Image			
Electrical			
Input Voltage	220 ~ 240VAC 50Hz		
Dimming Range	5 ~ 50 Lux		2 ~ 100 Lux
Rated Current	10A		20A
General			
Ingress Protection	IP44	IP65	IP65 (photocell only)
Operating Environment	-20 ~ 40°C / <93% Relative humidity		
Recommended Install	Place above light		Switchboard enclosure/cabinet
Dimensions	Ø82 x 108mm		35 x 66 x 90mm (1m cable)
Diagrams			
Dimensions			

* Sensors switches must be installed by a licensed electrician.



2 Channel Mains Voltage Receiver (433.92MHz)

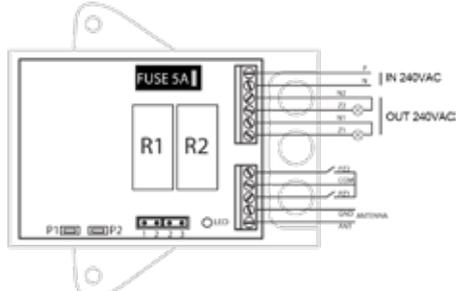
ENSA-RS Series: Trigger lights automatically by connecting to universal transmitters

Automate your LED lighting with the ENSA-RS1 2 channel 240VAC mains voltage RF receiver. With a maximum rated load of up to 1000W, you can integrate wireless triggering for a large number of lights via this receiver. The receiver shell is IP55 rated and suitable for external use.

The ENSA-RS1 includes two keyfobs for light control. The receiver can also be triggered by up to 128 universal transmitters. This includes wireless passive infrared detectors, beam/curtain detectors and door/window reed switches. This makes the ENSA-RS1 ideal for effective security lighting applications.

Contact your local ENSA™ professional for more information on universal wireless detector integration. Wireless transmitters are optional and sold separately.

Wireless Receiver | Series Specifications

Model	ENSA-RS1
Product Image	
Frequency	433.92MHz fixed code
Range (LoS)	100m
Programmable Outputs	2 relay outputs (latched or timed)
Maximum Codes	128
Electrical	
Input Voltage	240VAC 50 ~ 60Hz
Maximum Rated Load	1000W
General	
Ingress Protection	IP55
Included Remotes	2
Operating Environment	-20 ~ 55°C
Diagram	
Wiring Diagram	

Universal Transmitters | Additional Information



The ENSA-RS1 can be configured to have up to 128 universal transmitters. It is compatible with a wide range of wireless sensors, including:

- **Wireless reed & roller shutter reed switches:** Ideal for trigger lights on open/close, garages, sheds, warehouses, halls, on windows etc.
- **Passive infrared detectors:** Standard pet immune, ceiling mount and solar powered external sensors; perfect for triggering lights on general motion detection. Great for energy saving in intermittent people traffic areas.
- **Infrared beam presence detector:** Ideal for wireless curtain beam detection, eg: gates, walkways, corridors, fences, etc.

Glossary

Color Rendering

A general expression for the effect of a light source on the color appearance of objects.

Color Rendering Index (CRI)

A measure of the degree of color shift objects undergo when illuminated by the light source as compared with those same objects when illuminated by a reference source of comparable color temperature. The reference source has a CRI of 100.

Correlated Color Temperature (CCT)

The absolute temperature of a blackbody whose chromaticity most nearly resembles that of the light source. Usually specified in Kelvin (K). The lower the Kelvin temperature, the warmer the light feels, or appears.

Diffuser

An object with irregularities on a surface causing scattered reflections.

Digital Addressable Lighting Interface (DALI)

A digital communications protocol for controlling and dimming lighting fixtures, originally developed in Europe.

Driver

An electronic circuit that converts input power into a current source — a source in which current remains constant despite fluctuations in voltage. An LED driver protects LEDs from normal voltage fluctuations, overvoltages, and voltage spikes.

Efficacy

The light output of a light source divided by the total electrical power input to that source, expressed in lumens per watt (lm/W).

Energy Saving Scheme (ESS)

The IPART New South Wales Energy Saving Scheme aims to reduce electricity consumption by creating financial incentives for organisations in the form of energy saving certificates.

Halogen Lamp

A type of incandescent lamp that has a small amount of a halogen such as iodine or bromine added. The addition of the halogen aims to increase the lifespan and clarity of the tungsten filament creating the light.

Heat Sink

A part of the thermal system that conducts or convects heat away from sensitive components, such as LEDs and electronics.

High Intensity Discharge (HID) Lamps

A type of electrical gas-discharge lamp which produces light by means of electric arc in a tube filled with gas & metal salts. Types of HID lamps include high-pressure sodium (HPS), mercury-vapour, metal halide, ceramic metal-halide & xenon short arc.

Illuminance

The intensity of light falling on a surface area. If measured in square meters, the unit of illuminance is lux (lx).

Incandescent Lamp

A type of lamp that produces light by heating a filament wire to a hot temperature by passing an electric current through it.

Kelvin Temperature

Term and symbol (K) used to indicate the comparative color appearance of a light source when compared to a theoretical blackbody. Yellowish incandescent lamps are 3000K. Fluorescent light sources range from 3000K to 7500K and higher.

Light Emitting Diode (LED)

A Light Emitting Diode (LED) is a solid-state semiconductor device that converts electrical energy directly into light.

Lumen

The SI unit of luminous flux, equal to the amount of light emitted per second in a unit solid angle of one steradian from a uniform source of one candela.

Lumen Depreciation

Describes the percentage of light lost relative to the initial lumen output.

Luminous Flux

Luminous flux is the measure of the perceived power of light, adjusted to reflect the varying sensitivity of the human eye to different wavelengths of light

Lux (lx)

The SI unit of illuminance, or luminous flux incident on a unit area, frequently defined as one lumen per square meter (lm/m²).

Power Factor

The active power divided by the apparent power (i.e., product of the rms input voltage and rms input current of a driver).

Thermal Resistance (K/W)

The property of a material's ability to conduct heat.

Unified Glare Rating (UGR)

The number defining glare using luminance of a lamp divided by the background visible luminance of a room. Ranging from 5 to 40, lower numbers mean less glare.

Watt (W)

The unit of electrical power as used by an electrical device during its operation. Many lamps come with rating in watts to indicate their power consumption.



Join us in bringing energy efficiency to the world.

By becoming an ENSA practical energy efficiency solutions authorised reseller. If you are interested in distributing ENSA LED lighting and energy saving devices, visit www.ensalife.com for more information.

ENSA™

Energy Saving Devices

Contact your local ENSA energy efficiency professional:



Achieve more using less.

www.ensalife.com