




Modern intercom solutions.

Residential J Series: PoE IP intercom system for home & business

The Residential J Series IP kit is an intercom solution suitable for homes & single premise buildings. This kit includes everything necessary for a simple, single door station & monitor intercom system. Experience video, two-way talk and remote access, plus there is room to expand with additional door stations or intercom monitors.

- 1.0 megapixel door station (Horizontal FoV: 122°)
- Door station calls all connected indoor monitors
- Connect door stations & monitors via Ethernet
- Intuitive interface, for ease-of-use for any visitors
- Interface with most electronic door strikes & sensors
- Slim profile 7" touchscreen indoor intercom monitor
- Dual-way bidirectional talk with echo suppression
- Receive visitor notifications, leave audio & video messages, remote view, remote unlock and 2-way talk via iOS & Android devices

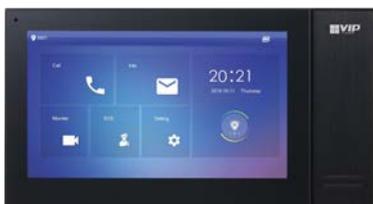

7" Slimline Touchscreen Monitor



Connect & Power over Ethernet



Two-way talk & Remote Unlock

Residential J Series Kit | Contents



1 x Door Station
Residential PoE IP Intercom
Door Station



1 x Black Monitor
Residential PoE IP Intercom
Monitor (Black)



1 x 10/100 PoE Switch
4 Port Unmanaged PoE
Switch


Residential J Series Kit | Series Specifications

Model	IP Door Station: INTIPRDSJ
Product Image	
Main Processor	Embedded Microprocessor
Camera System	1/4" 1.0 Megapixel CMOS (Horizontal FoV: 122°)
Low-Light Application	Day/Night ICR
Tamper Detection	Yes
Input / Output	1 x alarm input / 1 x alarm output / 1 x RS485
Audio / 2-Way Talk	Omni-directional Microphone & Embedded Loudspeaker for 2-way talk
Internal MicroSD Slot	Yes, up to 64GB
Protection	IP55 Ingress Protection
Construction	PC + Acrylic
Power Input / Use	12VDC 1A, PoE (802.3af) / Power Consumption <5W
Weight / Dimensions	0.32kg / 71 x 35 x 135mm

Model	IP Monitor: INTIPMONGB (Black)
Product Image	
Main Processor	Embedded Microprocessor
Audio/ 2-Way Talk	Omni-directional Microphone/ Embedded 1.5W Loudspeaker
Display Size	7" Colour TFT LCD (1024 x 600) Captive Touchscreen
Alarm Support	Yes; 6 Input channels / 1 output channel / 1 x RJ-45
Internal Capacity	MicroSD Slot, up to 32GB
Ethernet/ Network	10M/100Mbps adaptive / TCP/IP
Operating Temperature	-10 ~ +55°C / 10 ~ 95%RH (max.)
Installation	Surface
Power Input/ Use	12VDC, PoE (802.3af) / Standby < 4W / Operation <6W
Weight / Dimensions	0.35kg / 119.6 x 221.5 x 21.5mm

Model	4 Port PoE Switch: VSPOE-SWA4L
Product Image	
Ports	4 Ports
Device Ports	4 x 10/100 Base T (PoE power supply ports)
Uplink Ports	1 x 10/100 Base T
PoE Power Consumption	<30W Per Port / Total <36W
Switching Capacity	1Gbps
Packet Forwarding Rate	744Kbps
PoE Protocol	IEEE802.3af, IEEE802.3at
Switch Management	Unmanaged
Power	100 ~ 240VAC
Dimensions / Weight	170mm x 100mm x 35mm / 0.5kg

Residential J Series Kit | Diagram

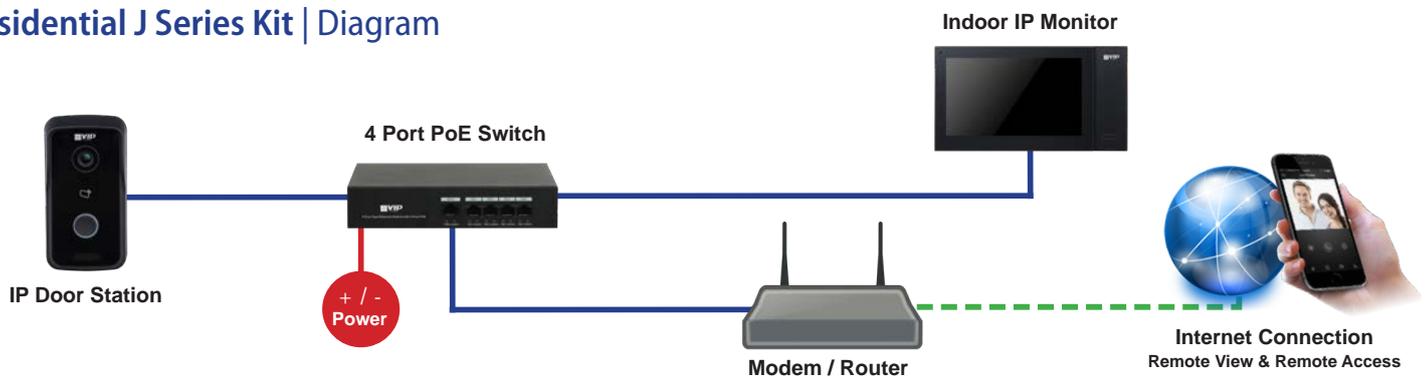

Your local VIP Vision™ IP solutions professional: