


# Technical Data & Instructions

## Electric Strike w/Lock Sensor, Door Sensor and Keeper Sensor

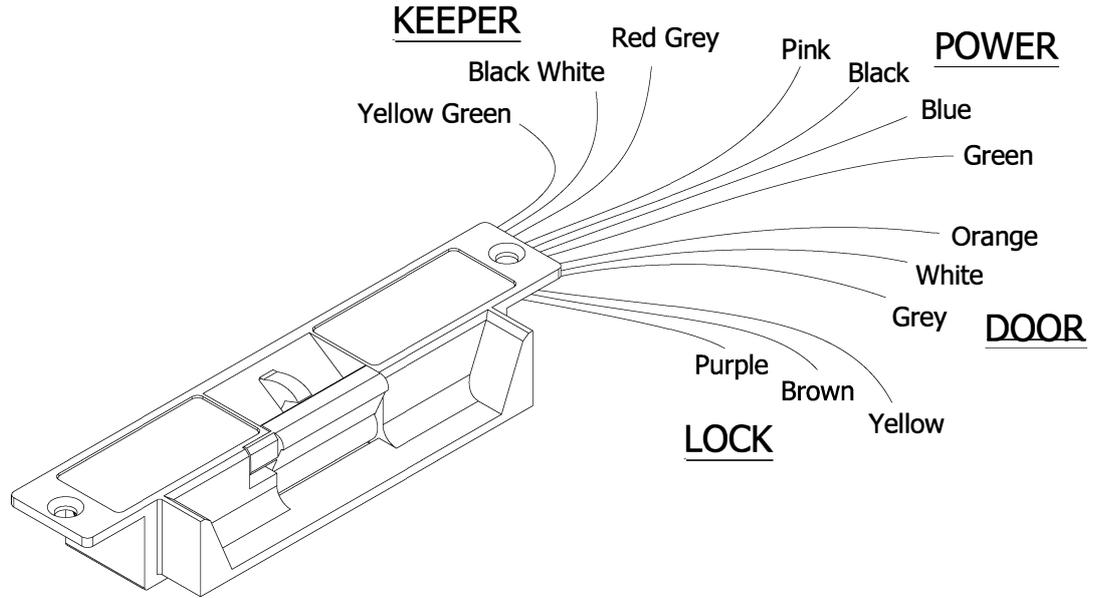

### 1. Technical Data

#### 1.1. Maximum Voltage & Current:


280mA / 12VDC    140mA / 24VDC

#### 1.2. Power Terminations:




#### 1.3. Sensors (OPTIONAL):


##### Lock Sensor (FAIL-SAFE/UNLOCK):

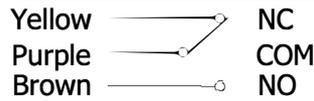


##### Lock Sensor (FAIL-SECURE/LOCK):

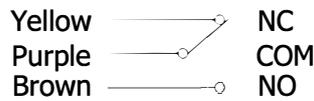

##### Door Sensor (OPENED):

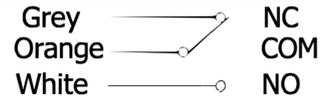


##### Keeper Sensor (NO ACTION):

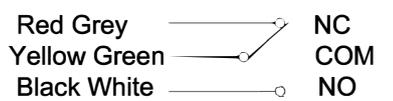


### 2. Dimensions

Sensor contact rating : 1A Max, 30V AC/DC

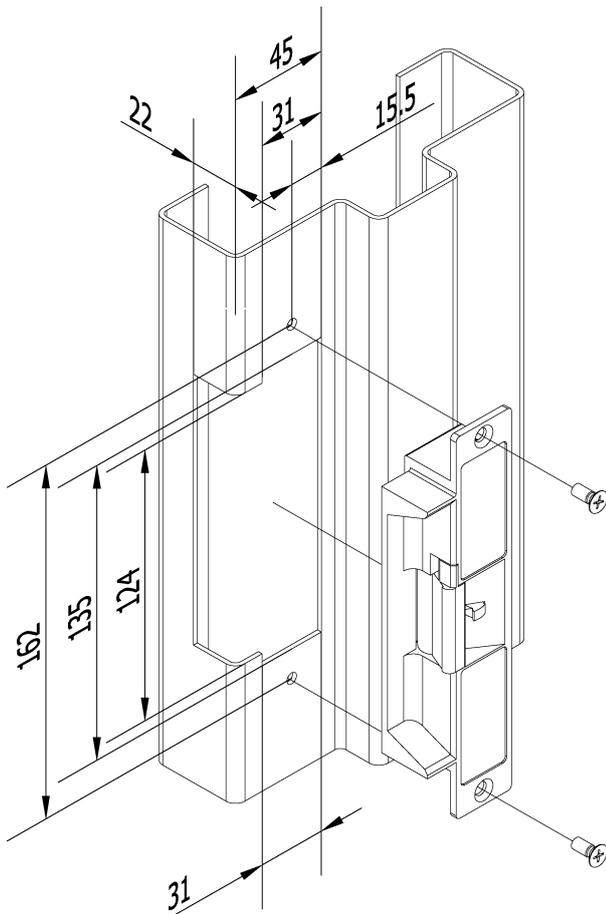

Unit:mm

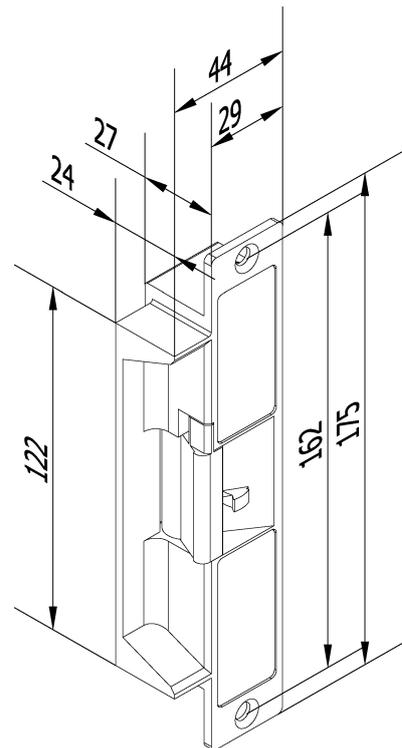


# Technical Data & Instructions

## 3.Changing from Fail-Secure to Fail-Safe Mode

**3-1. Loosen the screw as per the product diagram below.**

**3-2. Rotate the set plate 180° and slide the plate until it is properly seated.**

**3-3. Fasten the screw.**

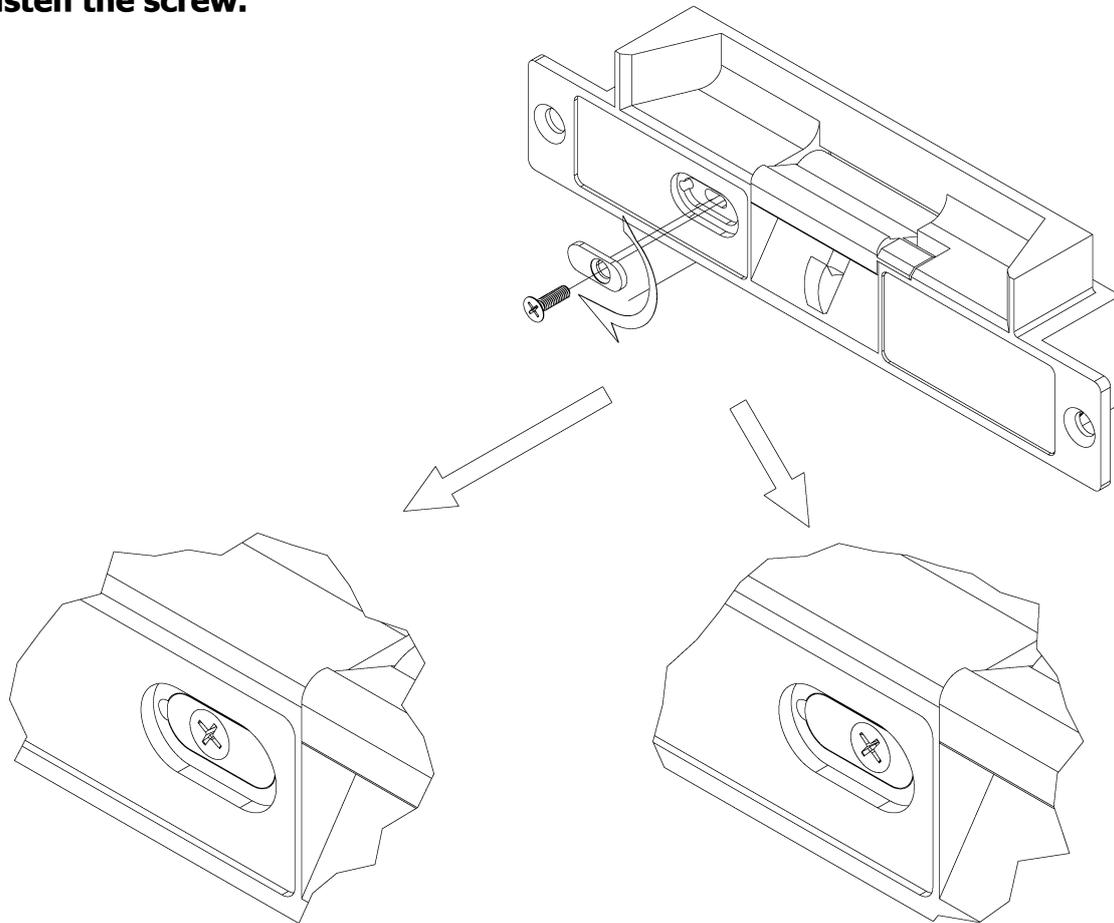

Fail-Safe Mode

Fail-Secure Mode

**3-4.First, tear the double-sided tape, then put on the cover plate.**

