



ENSATM

Energy Saving Devices

Achieve more using less.

ENSATM practical energy efficiency solutions for a brighter future.





ENSATM

Energy Saving Devices

We believe energy efficiency is key to creating a richer society with safer, happier communities & productive workplaces.

At ENSA, we understand the complexities of lighting upgrades. Production interruptions, equipment hire, increased operational expenses and labour costs make it essential for upgrades to be reliable and perform as intended from day one.

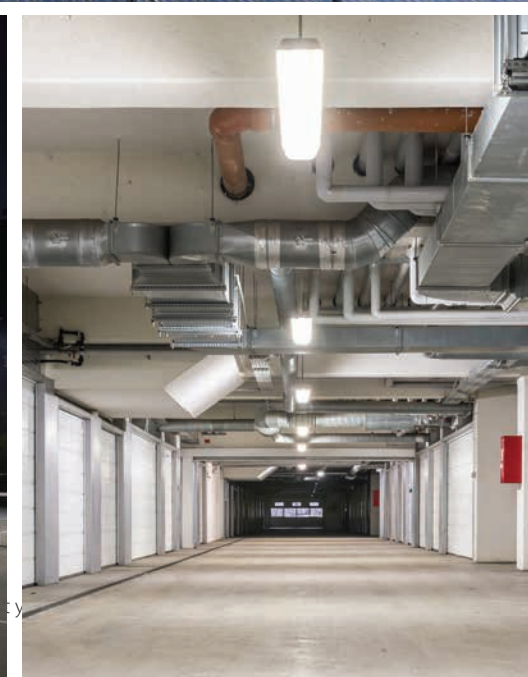
The ENSA LED lighting and energy saving devices range comprises practical energy efficiency solutions, designed for fast installation, power consumption reduction and improved lighting performance.

Our range includes industrial grade fixtures such as high bays, street lighting, flood lighting and canopy lighting. It also features a wide range of lights, such as LED tubes, downlights and panel lights, that are ready for commercial, shop fit-out and residential applications.

Products also include backup battery LED lights for emergency lighting, emergency exit signs and intelligent lighting and sensors to compound your energy saving.

LED lighting is the lighting technology for the future and ENSA is at the forefront of the field. Our products incorporate the latest in LED lighting technology to ensure each light offers excellent efficiency, light quality and service life.

To see our full product range, case studies or to find a reseller, please visit www.ensalife.com



ENSA™ Product Solutions Guide



6

High Bay Lighting

Professional high bay lighting ideal for industry, warehousing and more.



10

Flood Lighting

High power residential, commercial and industrial grade LED flood lighting.



18

Street Lighting

Modular LED street lighting for roads, walkways, public and remote areas.



20

Solar Lighting

Solar LED lights for self-sustaining lighting in almost any outdoors location



24

Panel Lighting

Minimalist fluorescent troffer replacements for use in the office or workplace.



26

Intelligent Lighting

Smart sensor-equipped oyster & batten lights with battery backup for emergency.



32

Tube & Link Lighting

Energy efficient LED tubes with option for microwave sensor models.



38

Downlighting

Comprehensive downlight selection in premium and standard series.



44

Retrofit Lighting

Wide range of energy efficient easy replacement LED bulbs and globes.



50

Energy Saving Switches

Motion sensor switches with microwave & PIR motion detection & dusk/dawn switches.



52

Transmitters/Receivers

Mains voltage transmitter/receiver devices and light activation via external sensors.



54

Glossary

Alphabetical list of terms and definitions relating to LED lighting.



Commercial LED High Bay Lighting




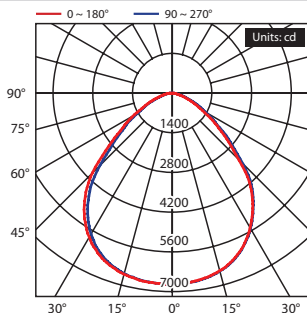
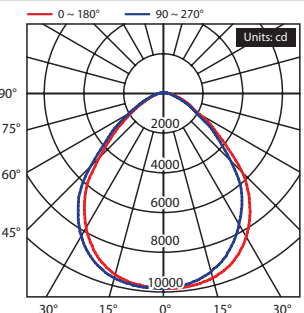
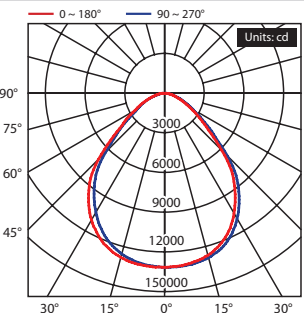
LHB-D Series: Commercial chain mount high bay lighting in 100W, 150W and 200W models

The ENSA™ LHB-D high bay series delivers energy efficient lighting to industrial and commercial environments at an economic price point. They are also weather-resistant, making them ideal for outdoors installations and events.

The LHB-D series delivers ideal lighting conditions in areas with high ceilings up to 12m, such as warehouses, manufacturing facilities and exhibition halls, with a high luminous efficacy for optimal power consumption. Each light has a compact, robust aluminium body and comes in 5700K cool white colour temperature.

- 100W, 150W and 200W industry-ready LED high bay light
- High 130lm/W luminous efficacy for energy efficiency
- Includes G1/2" thread hook for chain mount & safety cable
- 180° U-bracket and G1/2" pole mount (optional)
- Compact and robust: no additional reflector required
- Efficient heatsink cooling technology, IP66 weather rated
- Available in 5700K cool white colour temperature
- Available in 60°, 90° and 120° beam angles

Series Specifications

Model	LHB-D100	LHB-D150	LHB-D200																																																						
Product Image																																																									
Series Name	LHB-D Series: Commercial LED High Bay Series																																																								
Optical																																																									
Light Output	13000lm	19500lm	26000lm																																																						
Luminous Efficacy	130lm/W																																																								
Colour Temperature	5700K																																																								
Colour Rendering Index	>80																																																								
Beam Angle	90° (standard) / 120°	90° (standard) / 120°	60° / 90° (standard) / 120°																																																						
Rated Lifespan	50,000 hours																																																								
Electrical																																																									
Power Consumption	100W	150W	200W																																																						
Input Voltage	100~277VAC																																																								
Power Factor	> 0.93																																																								
Dimmable	N/A																																																								
General																																																									
Ingress Protection	IP66																																																								
Plug / Socket / Base	3-pin AC plug																																																								
Reflector / Diffuser	Aluminium / Polycarbonate																																																								
Housing Adjustments	G1/2" thread																																																								
Operating Environment	-20 ~ 40°C																																																								
Dimensions	Ø300 x 155mm	Ø330 x 155mm	Ø390 x 155mm																																																						
Photometry																																																									
Illuminance at a Distance	<table><thead><tr><th></th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>1m</td><td>2978</td><td>2.05</td></tr><tr><td>2m</td><td>744</td><td>4.11</td></tr><tr><td>6m</td><td>331</td><td>6.16</td></tr><tr><td>8m</td><td>186</td><td>8.22</td></tr><tr><td>10m</td><td>119</td><td>10.27</td></tr></tbody></table>		Centre Beam Avg (lx)	Beam Diameter (m)	1m	2978	2.05	2m	744	4.11	6m	331	6.16	8m	186	8.22	10m	119	10.27	<table><thead><tr><th></th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>1m</td><td>4511</td><td>1.98</td></tr><tr><td>2m</td><td>1128</td><td>3.97</td></tr><tr><td>3m</td><td>501</td><td>5.95</td></tr><tr><td>4m</td><td>282</td><td>7.94</td></tr><tr><td>5m</td><td>180</td><td>9.92</td></tr></tbody></table>		Centre Beam Avg (lx)	Beam Diameter (m)	1m	4511	1.98	2m	1128	3.97	3m	501	5.95	4m	282	7.94	5m	180	9.92	<table><thead><tr><th></th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>1m</td><td>5923</td><td>1.98</td></tr><tr><td>2m</td><td>1481</td><td>3.95</td></tr><tr><td>3m</td><td>658</td><td>5.93</td></tr><tr><td>4m</td><td>370</td><td>7.91</td></tr><tr><td>5m</td><td>237</td><td>9.88</td></tr></tbody></table>		Centre Beam Avg (lx)	Beam Diameter (m)	1m	5923	1.98	2m	1481	3.95	3m	658	5.93	4m	370	7.91	5m	237	9.88
	Centre Beam Avg (lx)	Beam Diameter (m)																																																							
1m	2978	2.05																																																							
2m	744	4.11																																																							
6m	331	6.16																																																							
8m	186	8.22																																																							
10m	119	10.27																																																							
	Centre Beam Avg (lx)	Beam Diameter (m)																																																							
1m	4511	1.98																																																							
2m	1128	3.97																																																							
3m	501	5.95																																																							
4m	282	7.94																																																							
5m	180	9.92																																																							
	Centre Beam Avg (lx)	Beam Diameter (m)																																																							
1m	5923	1.98																																																							
2m	1481	3.95																																																							
3m	658	5.93																																																							
4m	370	7.91																																																							
5m	237	9.88																																																							
Luminous Light Distribution																																																									

Ordering Information

Type	Series	Wattage	Colour Temperature	Beam Angle
LHB	-	D	100 (100W) 150 (150W) 200 (200W)	60 (60°, 200W only) 90 (90°) 120 (120°)
LHB-D150-C90: 150W LED High Bay in Cool White (90°)				

Additional Accessories

The optional **180° U-bracket mount** and **G1/2" pole mount** open up more installation opportunities for the LHB-D series.





Food Grade LED High Bay Lighting




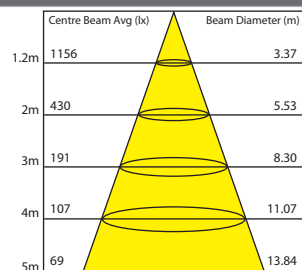
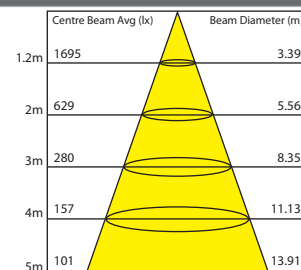
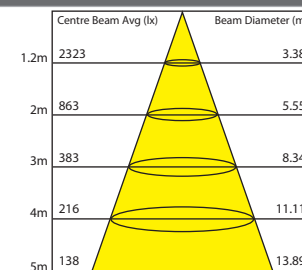
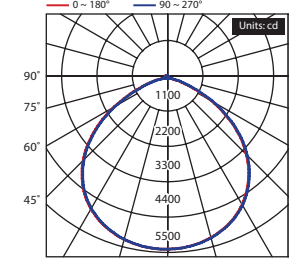
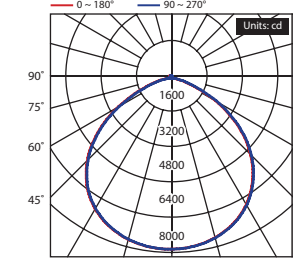
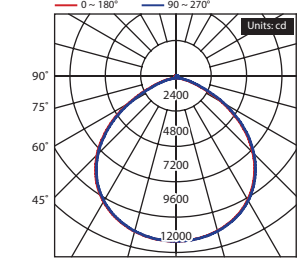
LHB-F Series: Professional food grade high bays in 100W, 150W and 200W models

The ENSA™ LHB-F series of professional high bay lights deliver energy efficient lighting to industrial and commercial environments. These lights are purpose-built for food prep environments and are easily cleaned with an IP69K rated body.

The LHB-F series delivers superb lighting performance with high luminous efficacy of 135lm/W. Models feature a powder coated, corrosion resistant heatsink with a smooth surface that reduces build up of dust and simplifies routine cleaning. Luminaires are free of glass to ensure safe practices when installed in food preparation environments.

- Food preparation LED high bays in 100W, 150W & 200W
- In 4000K natural & 5700K cool white with 120° beam angle
- Suitable for food processing environments - no glass, smooth non-toxic surface & easy to clean
- Highly durable IP69K weather resistance - steam cleanable
- High 135lm/W luminous efficacy for energy efficiency
- Series is IPART approved for use in the NSW ESS
- Prismatic reflector available (*sold separately*)

Series Specifications

Model	LHB-F100		LHB-F150		LHB-F200	
Product Image						
Series Name	LHB-F Series: Food Grade LED High Bay Series					
Optical						
Light Output	13500lm		20250lm		27000lm	
Luminous Efficacy			135lm/W			
Colour Temperature			4000K / 5700K			
Colour Rendering Index			>70 / >80			
Beam Angle			120°			
Light Decay			<5% at 9,000 hours			
Rated Lifespan			54,000 hours			
Electrical						
Power Consumption	100W		150W		200W	
Input Voltage			100 ~ 277VAC / 277 ~ 480VAC			
Power Factor			> 0.93			
Dimmable			N/A			
General						
Ingress Protection			IP69K			
Plug / Socket / Base			3-pin AC plug			
Reflector / Diffuser			Aluminium / Polycarbonate			
Housing Adjustments			N/A			
Operating Environment			-10 ~ 40°C			
Dimensions			Ø490 x 183mm			
Certifications			NSF, ETL, DLC, SAA, IPART, VEET			
Photometry						
Illuminance at a Distance						
Luminous Light Distribution						

Ordering Information

Type	Series	Wattage	Colour Temperature
LHB	-	F	100 (100W) 150 (150W) 200 (200W)
			N (Natural white) C (Cool white)

LHB-F200-C: 200W LED High Bay in Cool White

Additional Accessories

The optional prismatic reflector (LHB-FRFP2) creates a more even distribution of light, sending light out in all directions.

Recommended for installations at lower ceiling heights.





Professional High Power LED Flood Lighting






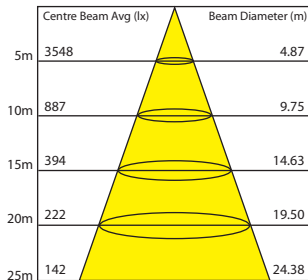
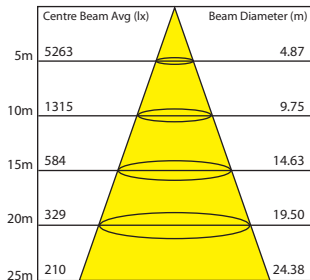
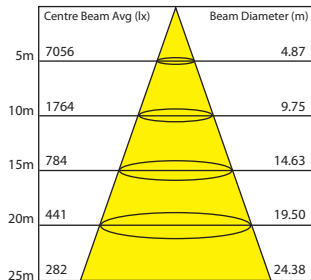
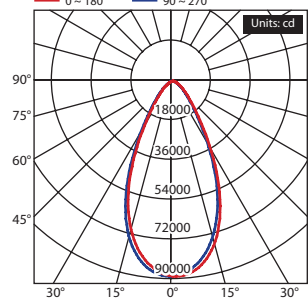
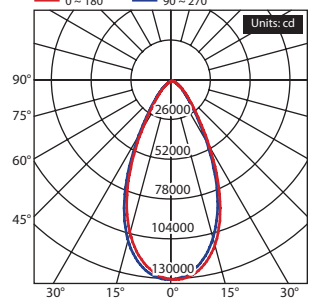
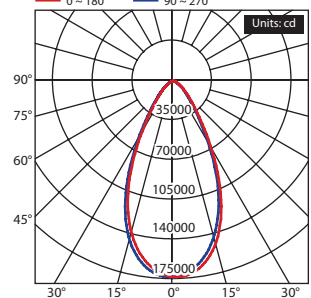
LFL-F Series: Adjustable flood lighting in 480W, 720W, 960W, 1200W & 1440W models

Combining innovative lighting design and leading energy efficiency, ENSA™ LFL-F Series LED flood lights deliver large scale lighting solutions without compromise. Lights feature precision adjustment controls with modular LED units that rotate and tilt to enable precision light aiming and smooth installation.

LFL-F Series lighting solutions also sport 165lm/W, low lumen-depreciation LEDs to increase lifespan and reduce required maintenance. They have been installed in sports lighting applications and in large outdoor production & carpark facilities.

- Best in performance LED lighting efficiency at 165lm/W
- Unique rotate & tilt modules for precision adjustment
- 360° LED module rotation and 140° tilt adjustment
- Reinforced mounting bracket with multiple mount points
- High performance, long lifespan Lumileds LED package
- High quality Meanwell driver, DALI dimmable optional
- Available in a variety of beam angles as per application
- IP66 weather rated, powder-coated aluminium chassis

Series Specifications

Model	LFL-F480		LFL-F720		LFL-F960		LFL-F1200		LFL-F1440		
Product Image											
Series Name	LFL-F Series LED Flood Light										
Optical											
Luminous Flux	79,200lm		118,800lm		158,400lm		190,000lm		237,600lm		
Luminous Efficacy	165lm/W										
LED Package	Lumileds (62pcs/module)										
LED Testing	LM80 / TM21 (available on request)										
Colour Temperature	6500K cool white										
Colour Rendering Index	> 70										
Beam Angle Options	60° (standard) / 30°, 90°, 120° (optional)										
Rated LED Lifespan	50,000 hours										
Electrical											
Power Consumption	480W		720W		960W		1200W		1440W		
Input Voltage	90 ~ 305VAC, 50/60Hz										
Power Factor	> 0.95										
Dimming Technology	DALI (optional)										
General											
Ingress Protection	IP66										
Driver Package	Meanwell LED driver, 3-pin AC plug										
Reflector / Diffuser	Aluminium heatsink, Polycarbonate lens										
Housing Adjustments	360° rotate & 140° tilt (modules)										
Operating Environment	-40° ~ 60°C										
Dimensions	536 x 165 x 579mm		691 x 202 x 579mm		846 x 202 x 579mm		1001 x 277 x 579mm		1156 x 277 x 579mm		
Net Weight	12.0kg		15.8kg		19.9kg		24.2kg		26.5kg		
Effective Projected Area	0.20m²		0.35m²		0.44m²		0.58m²		0.64m²		
Windage (Class 15, 42~51m/s)	Load	34.0kg		43.5kg		53.0kg		63.0kg		72.3kg	
	Pole Bearing	46.0kg		59.3kg		72.9kg		87.2kg		98.8kg	
Photometry											
Illuminance at a Distance											
	LFL-F480-C (480W, 60°)				LFL-F720-C (720W, 60°)				LFL-F960-C (960W, 60°)		
Luminous Light Distribution											
	LFL-F480-C (480W, 60°)				LFL-F720-C (720W, 60°)				LFL-F960-C (960W, 60°)		

Ordering Information

Type	Series	Wattage	Colour Temperature	Beam Angle
LFL	-	480 (480W) 720 (720W) 960 (960W)	-	(60° standard) 30D (30°) 90D (90°) 120D (120°)
	F		C (Cool white)	



Professional High Power LED Flood Lighting






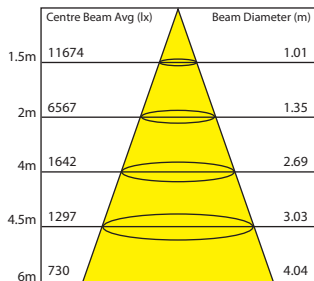
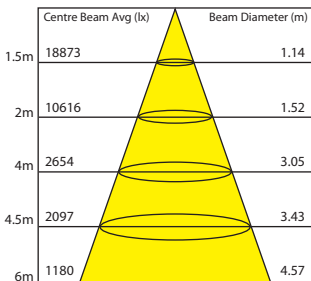
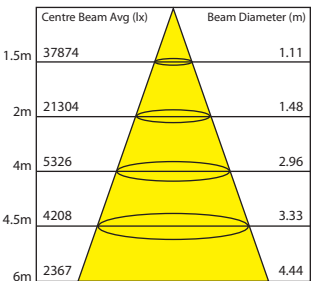
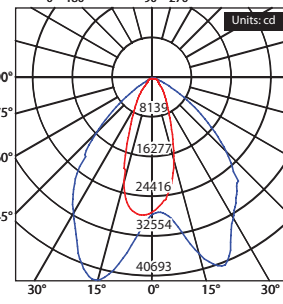
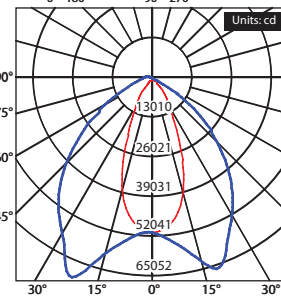
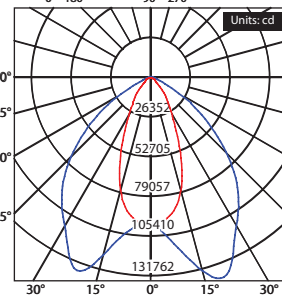
LFL-G2 Series: LED flood lighting with U-shape bracket in 240W, 360W, 480W, 720W & 960W

The ENSA™ LFL-G Series of LED flood lights is a flexible choice large scale lighting solutions. These high power lights feature dual bracket & light tilt adjustment for a smooth installation process, and are ideal in sports lighting applications and in large outdoor production and carpark facilities.

LFL-G Series flood lights are incredibly reliable with a rated lifespan up to 100,000 hours, and have versatile dimming options with both DALI and DMX control standards.


- High performance 172lm/W LED lighting efficiency
- Incredible light output at up to 165,120 lumens
- Wide 60° x 100° beam angle, ideal for high installs
- 90° LED module tilt and 180° adjustable U-bracket
- High performance, long lifespan 5050 SMD LED package
- Optional dimming controlled via DALI & DMX standards
- Independent power box with efficient heat dissipation
- IP67 weather rated and IK10 vandal resistance

Series Specifications

Model	LFL-G240-C2		LFL-G360-C2	LFL-G480-C2		LFL-G720-C2	LFL-G960-C2
Product Image							
Series Name	LFL-G2 Series LED Flood Lights						
Optical							
Luminous Flux	41,280lm		61,920lm	87,360lm		123,840lm	165,120lm
Luminous Efficacy	172lm/W						
LED Package	5050 SMD LEDs (120pcs/module)						
Colour Temperature	5000K cool white						
Colour Rendering Index	> 80						
Beam Angle	60° x 100°						
Rated LED Lifespan	100,000 hours						
Electrical							
Power Consumption	240W		360W	480W		720W	960W
Input Voltage	100 ~ 277/347/480VAC						
Power Factor	> 0.95						
Dimming Technology	DALI / DMX (optional)						
General							
Ingress Protection	IP67						
Vandal Protection	IK10						
Driver Package	Meanwell LED driver, 3-pin AC plug						
Reflector / Diffuser	Polycarbonate lens						
Housing Adjustments	90° light tilt, 180° U-bracket tilt						
Operating Environment	-20° ~ 55°C						
Dimensions (without bracket)	460 x 230 x 75mm		690 x 230 x 75mm	460 x 460 x 75mm		690 x 460 x 75mm	690 x 690 x 75mm
Net Weight	12.5kg		14.5kg	18kg		24.5kg	35.5kg
Photometry							
Illuminance at a Distance							
	LFL-G240-C2 (240W, cool white)		LFL-G480-C2 (480W, cool white)		LFL-G960-C2 (960W, cool white)		
Luminous Light Distribution							
	LFL-G240-C2 (240W, cool white)		LFL-G480-C2 (480W, cool white)		LFL-G960-C2 (960W, cool white)		

Ordering Information

Type	Series	Wattage	Colour Temperature
LFL	-	G	-
		240 (240W)	
		360 (360W)	
		480 (480W)	
		720 (720W)	
		960 (960W)	
LFL-G480-C2: 480W LED Flood Light in Cool White			

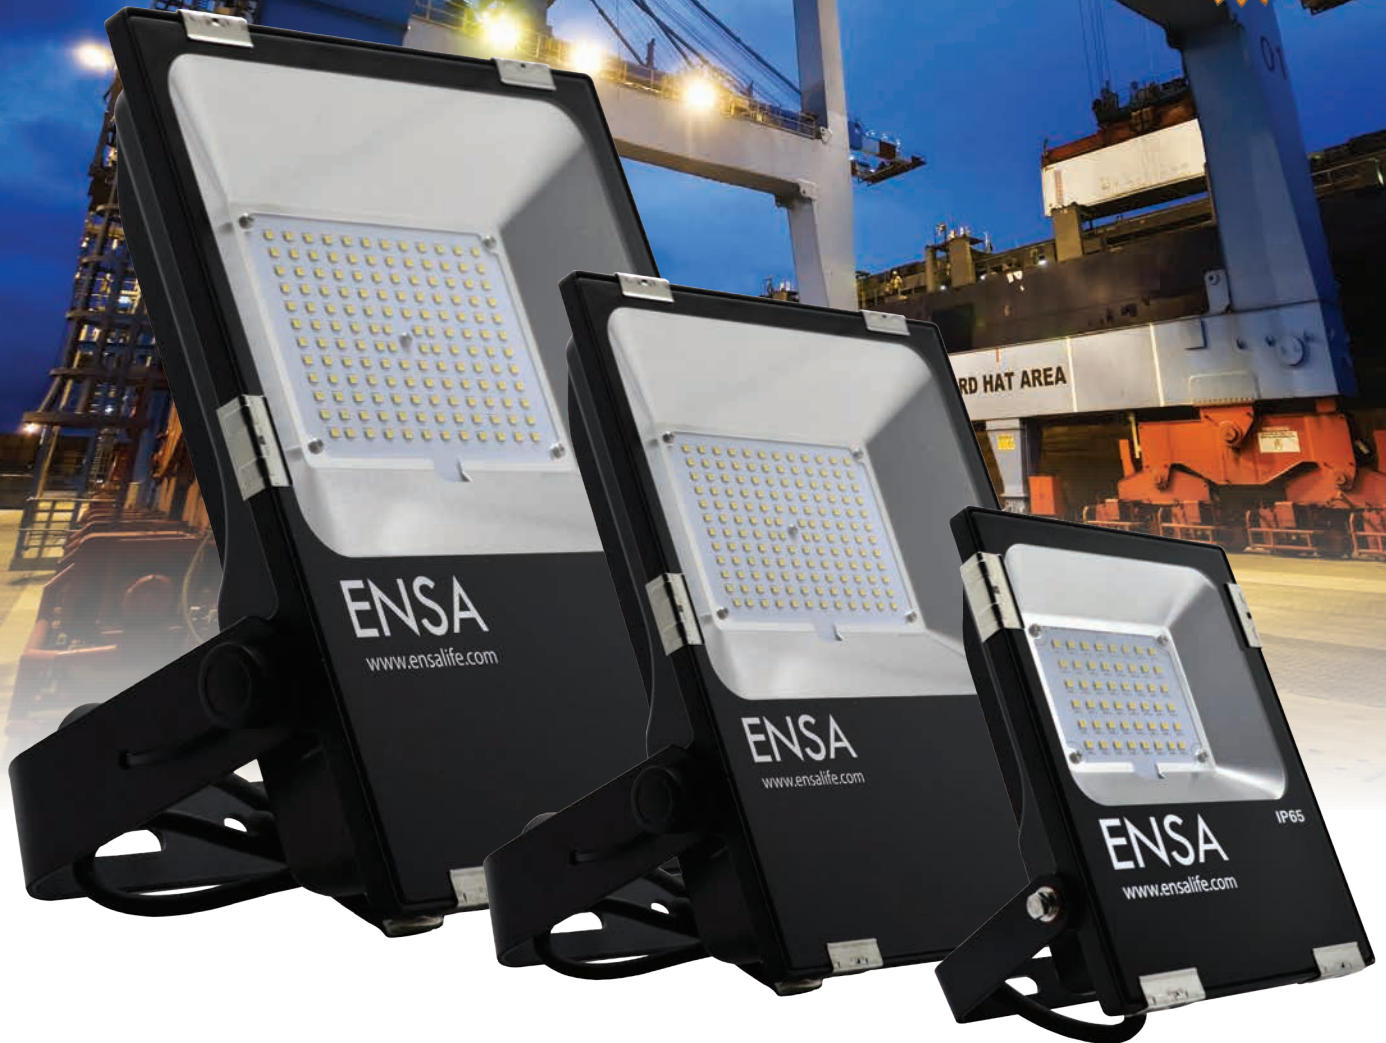

Professional LED Flood Lighting








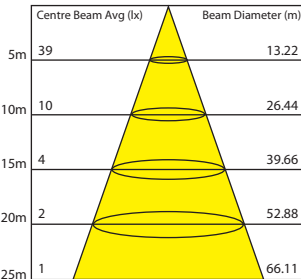
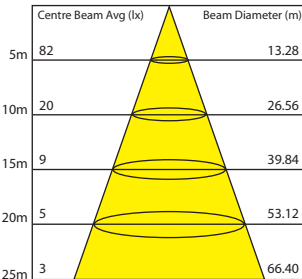
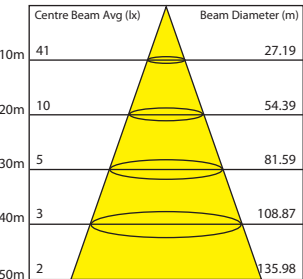
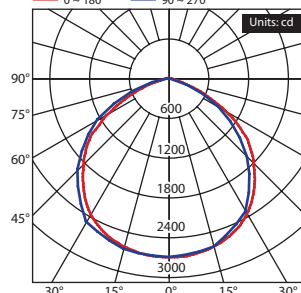
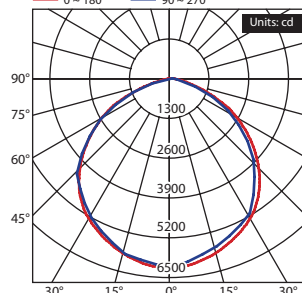
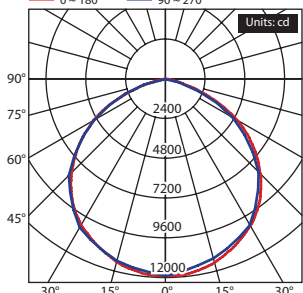
LFL-B2 Series: High performance floods in 20W, 30W, 50W, 80W, 100W, 150W & 200W models

The ENSA™ LFL-B2 series of high-power LED flood lights delivers exceptional lighting performance in a robust, weather resistant package. Available in 20W, 30W, 50W, 80W, 100W, 150W and 200W models with a wide 120° beam angle.

Ideal for general purpose lighting in commercial and industrial environments including parking lots, building sites, security lighting, sporting fields, signage and more. LFL-B series floods feature a slim, lightweight design with a U-shape adjustable bracket, making them easy to mount. Each light sports a powder coated, IP65 rated, aluminium body and heatsink for excellent thermal conductivity, a tempered glass front for superior light transmittance & UV resistant ASA plastic bolt caps.

- High luminous efficacy LED flood lighting (150lm/W)
- Available in 3000K warm & 5000K cool white colour temp.
- Wide 120° beam angle, ideal for general purpose lighting
- High performance Lumiled LEDs & Mean Well driver
- IP65 weather resistant, suitable for outdoor applications
- 180° adjustable two-point fastened mounting bracket

Series Specifications

Model	LFL-B20-2	LFL-B30-2	LFL-B50-2	LFL-B80-2	LFL-B100-2	LFL-B150-2	LFL-B200-2																																																					
Product Image																																																												
Series Name	LFL-B2 Series Commercial LED Flood Lights																																																											
Optical																																																												
Luminous Flux	3000lm	4500lm	7500lm	12000lm	15000lm	22500lm	30000lm																																																					
Luminous Efficacy	150lm/W																																																											
Colour Temperature	3000K / 5000K																																																											
Colour Rendering Index	> 70																																																											
Beam Angle	120°																																																											
Light Decay	<3% at 6,000 hours																																																											
Rated Lifespan	50,000 hours																																																											
Electrical																																																												
Power Consumption	20W	30W	50W	80W	100W	150W	200W																																																					
Input Voltage	100 ~ 240VAC																																																											
Dimmable	N/A																																																											
General																																																												
Ingress Protection	IP65																																																											
Plug / Socket / Base	3-pin AC plug																																																											
Reflector / Diffuser	Aluminium reflector / glass front																																																											
Housing Adjustments	180° adjustable housing																																																											
Operating Environment	-30° ~ 50°C																																																											
Dimensions	216 x 152 x 40mm	226 x 167 x 40mm	310 x 220 x 50mm	354 x 245 x 55mm	402 x 295 x 60mm	430 x 330 x 60mm	470 x 360 x 60mm																																																					
Weight	0.78kg	1.10kg	2.10kg	3.70kg	4.70kg	N/A	7.12kg																																																					
Photometry																																																												
Illuminance at a Distance	 <table><thead><tr><th></th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>5m</td><td>39</td><td>13.22</td></tr><tr><td>10m</td><td>10</td><td>26.44</td></tr><tr><td>15m</td><td>4</td><td>39.66</td></tr><tr><td>20m</td><td>2</td><td>52.88</td></tr><tr><td>25m</td><td>1</td><td>66.11</td></tr></tbody></table> <p>LFL-B50-C2 (50W, cool white)</p>			Centre Beam Avg (lx)	Beam Diameter (m)	5m	39	13.22	10m	10	26.44	15m	4	39.66	20m	2	52.88	25m	1	66.11	 <table><thead><tr><th></th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>5m</td><td>82</td><td>13.28</td></tr><tr><td>10m</td><td>20</td><td>26.56</td></tr><tr><td>15m</td><td>9</td><td>39.84</td></tr><tr><td>20m</td><td>5</td><td>53.12</td></tr><tr><td>25m</td><td>3</td><td>66.40</td></tr></tbody></table> <p>LFL-B100-C2 (100W, cool white)</p>			Centre Beam Avg (lx)	Beam Diameter (m)	5m	82	13.28	10m	20	26.56	15m	9	39.84	20m	5	53.12	25m	3	66.40	 <table><thead><tr><th></th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>10m</td><td>41</td><td>27.19</td></tr><tr><td>20m</td><td>10</td><td>54.39</td></tr><tr><td>30m</td><td>5</td><td>81.59</td></tr><tr><td>40m</td><td>3</td><td>108.87</td></tr><tr><td>50m</td><td>2</td><td>135.98</td></tr></tbody></table> <p>LFL-B200-C (200W, cool white)</p>			Centre Beam Avg (lx)	Beam Diameter (m)	10m	41	27.19	20m	10	54.39	30m	5	81.59	40m	3	108.87	50m	2	135.98
		Centre Beam Avg (lx)	Beam Diameter (m)																																																									
5m	39	13.22																																																										
10m	10	26.44																																																										
15m	4	39.66																																																										
20m	2	52.88																																																										
25m	1	66.11																																																										
	Centre Beam Avg (lx)	Beam Diameter (m)																																																										
5m	82	13.28																																																										
10m	20	26.56																																																										
15m	9	39.84																																																										
20m	5	53.12																																																										
25m	3	66.40																																																										
	Centre Beam Avg (lx)	Beam Diameter (m)																																																										
10m	41	27.19																																																										
20m	10	54.39																																																										
30m	5	81.59																																																										
40m	3	108.87																																																										
50m	2	135.98																																																										
Luminous Light Distribution	 <p>Units: cd</p> <p>LFL-B50-C2 (50W, cool white)</p>		 <p>Units: cd</p> <p>LFL-B100-C2 (100W, cool white)</p>		 <p>Units: cd</p> <p>LFL-B200-C (200W, cool white)</p>																																																							

Ordering Information

Type	Series		Wattage		Colour Temperature	Series
LFL	-	B	20 ~ 200 (20W ~ 200W)	-	C (Cool white) W (Warm white*)	2 Series 2
LFL-B100-C2: 100W LED Flood Light in Cool White						

* Warm white colour temp. available in 20W/30W/50W models only



LED Sensor Flood Lighting




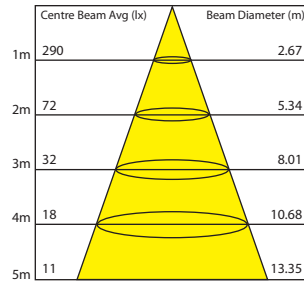
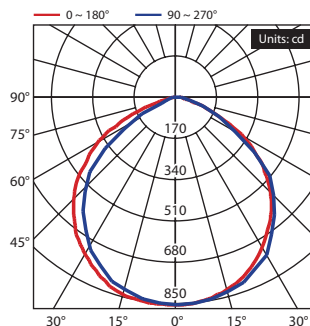
LFL-C2 Series: Passive infrared motion sensor LED flood lights in 20W, 30W & 50W models

The LFL-C2 Series combines efficient LED flood lighting with customisable motion-sensing technology to compound your energy savings. Available in 20W, 30W & 50W with adjustable ambient light sensitivity, on-time delay and passive infrared (PIR) motion detection to deliver energy efficient lighting and ideal for security and general purpose lighting.

The LFL-C2 Series is built with a metal, IP65 rated weather resistant chassis, making them suitable for outdoor lighting in residential, commercial and industrial applications.

- Available in 5000K cool white with 120lm/W light output
- Effective light distribution with 120° beam angle
- Adjustable PIR detection up to 12m with a 140° arc.
- Adjustable on-time delay (5s ~ 5min)
- Adjustable U-shape mount with over 180° of motion
- Adjustable PIR bracket (180° panning with 90°~90° tilt)

Series Specifications

Model	LFL-C20-CS2-5		LFL-C30-CS2-5		LFL-C50-CS2-5																		
Product Image																							
Series Name	LFL-C2 Series LED Sensor Flood Lights																						
Optical																							
Light Output	2400lm		3600lm		6000lm																		
Luminous Efficacy	120lm/W																						
Colour Temperature	5000K																						
Colour Rendering Index	>80																						
Beam Angle	120°																						
Light Decay	<30% at 35,000 hours																						
Rated Lifespan	35,000 hours																						
Electrical																							
Power Consumption	20W		30W		50W																		
Input Voltage	100 ~ 240VAC																						
Power Factor	> 0.95																						
Dimmable	N/A																						
General																							
Ambient Sensor	2~2000lx (adjustable)																						
Motion Sensor	PIR: 140° arc up to 12m range (horizontally), Ø6m range (ceiling)																						
Sensor Calibration	Adjustable motion sensitivity and on-time delay (5s ~ 5min) - <i>Sensor mode cannot be disabled</i>																						
Ingress Protection	IP65																						
Plug / Socket / Base	Bare wire, unterminated																						
Reflector / Diffuser	Aluminium reflector / Tempered glass front																						
Housing Adjustments	+180° angle adjustable U-shape bracket / Fully adjustable PIR sensor stalk Adjustable PIR sensor bracket (180° panning, 90°~90° tilt)																						
Operating Environment	-20° ~ 50°C																						
Dimensions	204 x 206 x 38mm		253 x 236 x 40mm		312 x 279 x 46mm																		
Photometry																							
Illuminance at a Distance	<div><table><thead><tr><th></th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>1m</td><td>290</td><td>2.67</td></tr><tr><td>2m</td><td>72</td><td>5.34</td></tr><tr><td>3m</td><td>32</td><td>8.01</td></tr><tr><td>4m</td><td>18</td><td>10.68</td></tr><tr><td>5m</td><td>11</td><td>13.35</td></tr></tbody></table><p>LFL-C20-CS2-5 (20W)</p></div>						Centre Beam Avg (lx)	Beam Diameter (m)	1m	290	2.67	2m	72	5.34	3m	32	8.01	4m	18	10.68	5m	11	13.35
	Centre Beam Avg (lx)	Beam Diameter (m)																					
1m	290	2.67																					
2m	72	5.34																					
3m	32	8.01																					
4m	18	10.68																					
5m	11	13.35																					
Luminous Light Distribution	<div><p>LFL-C20-CS2-5 (20W)</p></div>																						

Ordering Information

Type	Series		Wattage		Colour Temperature		Sensor	Series
LFL	-	C2	20 (20W) 30 (30W) 50 (50W)	-	C	(Cool white)	S (PIR Sensor)	2 (Series 2)
LFL-C20-CS2-5: 20W LED Sensor Flood Light in Cool White								



Professional LED Street & Area Lighting




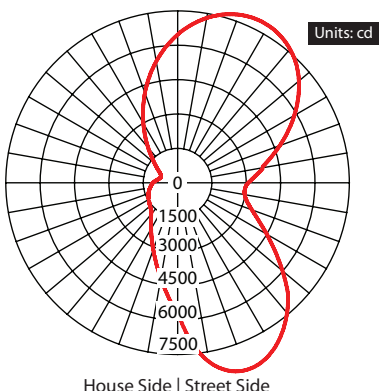
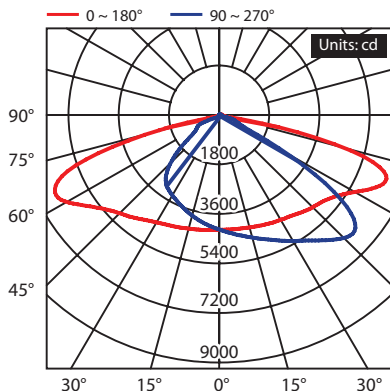








LSL-B Series: Street and area lighting available in 100W, 150W and 200W

The ENSA™ LSL-B Series comprises versatile LED lights with a variety of mounting and sensor options to deliver high performance street & area lighting. These luminaires offer impressive lighting with high energy efficiency in a robust slimline housing. LSL-B Series lights feature a wide range of mounting solutions to fit to a multitude of installation scenarios. Models also feature the option for built-in dusk/dawn switching & motion detection by passive infrared or microwave sensors.

LSL-B Series lights are ideal for illumination in street lighting applications, in area lighting for public spaces and for general purpose lighting in a variety of commercial and industrial building environments.

- High luminous efficacy up to 135lm/W
- Includes in-line surge protection for up to 20KV
- Batwing or square distribution for street & area lighting
- Robust IP66/IK08 weather & vandal resistant housing
- Long lifespan LED lighting: rated for up to 50,000 hours
- Photocell & PIR / microwave motion sensor optional
- Rotate polycarb lens for easy light direction adjustment
- Versatile mounting with 5 adjustable brackets (*sold separately*)

Series Specifications

Model	LSL-B100		LSL-B150		LSL-B200	
Product Image						
Series Name	LSL-B Series: LED Street Lights					
Optical						
Light Output	13,500lm		20,250lm		27,000lm	
Luminous Efficacy			135lm/W			
Colour Temperature			5000K			
Colour Rendering Index			70			
Beam Angle			155° x 85°			
Light Decay			23% at 50,000 hours			
Rated Lifespan			50,000 hours			
Electrical						
Power Consumption	100W		150W		200W	
Input Voltage			100 ~ 277VAC			
Power Factor			> 0.93			
Dimmable			1 ~ 10V / PWM			
General						
Ingress Protection			IP66			
Vandal Resistance			IK08			
Plug / Socket / Base			Unterminated			
Reflector / Diffuser			Clear polycarbonate Lens			
Operating Environment			-20° ~ 50°C			
Pole Diameter			Ø62.1mm (LSL-BKTS *sold separately)			
Dimensions	428 x 247 x 55mm		428 x 247 x 55mm		458 x 268 x 55mm	
Photometry						
Max Intensity Distribution (150W)	 <p>Units: cd</p> <p>House Side Street Side</p>		Luminous Light Distribution (150W)		 <p>Units: cd</p>	
Brackets						
						
						
	Slip Fitter Adjustable LSL-BKTS		Fixed Pole Mount LSL-BKTP		Adjustable Pole Mount LSL-BKTA	
					Trunnion Mount LSL-BKTT	
					Yoke Wall Mount LSL-BKTY	

Ordering Information

Type	Series		Wattage	Colour Temperature	Sensors
LSL	-	B	100 (100W)	C (Cool white)	S (Motion sensing)
			150 (150W)		P (Photocell)
			200 (200W)		
LSL-B150-CS: 150W LED Street Light in Cool White with Motion Sensing					



Motion Activated Solar LED Street Lighting

SSL-B Series: Solar LED street lighting with microwave motion detection in 30W, 50W & 60W

The ENSA™ SSL-B Series comprises motion-activated, solar-powered LED street lights, designed to deliver standalone lighting to outdoor locations without mains power access. SSL-B Series models couple monocrystalline silicon solar panel technology and high capacity lithium iron phosphate (LiFePO4) batteries for efficient use & extended operating time.

Models feature a customisable motion detection system that can be configured for street, area & security lighting, and other off-grid outdoor lighting purposes. They are ideal for use in remote or under-developed locations such as on rural roads, at remote fences/gates, in construction sites, and in general street lighting applications.

- Outstanding energy efficiency at >180lm/W performance
- Up to 21% conversion rate monocrystalline solar panels
- Dusk/dawn switch, motion sensing & on-time delay
- Configure power output for different times of the day
- 60° tilt-adjustable LED modules for lighting customisation
- Multiple days of use from full charge (sensor mode, overcast)
- LED available in 5700K cool white colour temperature
- IP65 weather rated with included bird guard (optional)

Superb off-grid lighting

Superior lighting in challenging locations

SSL-B Series Solar LED Street Lights offer superb lighting results for an off-grid system. Models feature incredible light output and LED lifespan, making them an ideal long-term street or area lighting solution for locations without access to mains power.

- High efficiency +180lm/W LED lighting module
- 50,000hrs LED lifespan & microwave motion sensing
- Adjustable LED light module, tilt -30° ~ 30°

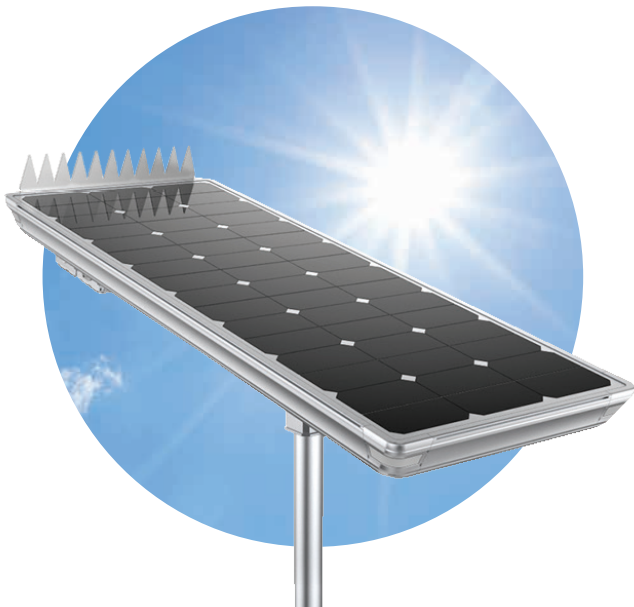


Latest solar technology

Excellent solar energy generation & storage

SSL-B Series monocrystalline solar panels are built for high performance with large panel surface area to maximise solar energy generation. Models are paired with the latest lithium battery technology for increased light uptime, even in extended periods of sub-optimal solar generation conditions.

- Monocrystalline panel for $\geq 21\%$ panel conversion
- Lithium iron phosphate batteries (LiFePO4)
- Multiple days of light uptime across the range



Optimise your solar light





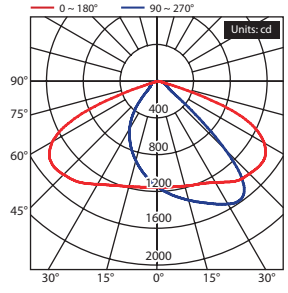
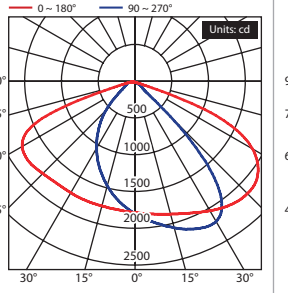
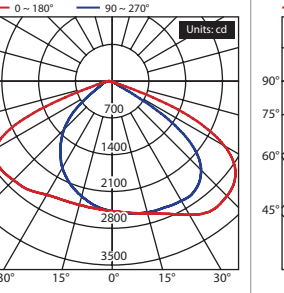
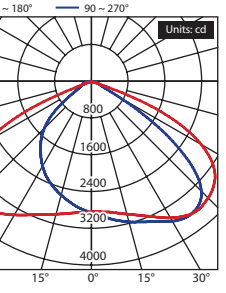
Fully configure your LED solar lighting system

Customise SSL-B Series Solar LED Street Lights to your exact specifications quickly via infrared remote control. Monitor system health, set motion detection properties and configure as per your application requirements.

- Panel & battery control and panel-driven dusk/dawn
- Configure light output for up to 5 time periods
- Setup motion detection lighting with motion sensor adjustment & dimmed light output levels
- Set custom on-time delay from 0s up to 120s



Series Specifications

Model	SSL-B20	SSL-B30	SSL-B50	SSL-B60
Product Image				
Series Name	SSL-B Series Motion Activated Solar LED Street Lights			
Light				
Light Output	3900lm	5500lm	9400lm	11100lm
Luminous Efficacy	>180lm/W			
Colour Temperature	5700K Cool White			
Beam Angle	145° x 75°		145° x 100°	
Rated LED Lifespan	50,000hrs			
LED Testing	LM80 / TM21 (available on request)			
Power Consumption	20W	30W	50W	60W
Internal Battery	218Wh LiFePO4	320Wh LiFePO4	500Wh LiFePO4	1200Wh LiFePO4
Input Voltage	12.8VDC	12.8VDC	12.8VDC	25.6VDC
Operating Time	72~120 hours (intelligent mode, rainy weather)			120~168 hours (int. mode, rainy weather)
Light Bracket	Adjustable bracket angle -30° ~ 30°			
Solar Panel				
Panel Type	Monocrystalline silicon			
Panel Wattage	56W	80W	120W	180W
Panel Conversion Rate	≥21%			
Panel Bracket	Adjustable bracket angle -60° ~ 60°			
Rec. Install Height	5 ~ 7m		8 ~ 10m	
Detection				
Motion Detection	Microwave motion sensor			
Detection Range	Ø8 ~ 15m (height: 5 ~ 7m)		Ø8 ~ 15m (height: 8 ~ 10m)	
Light Mode Settings	Normal	Mode time period / Brightness		
	Morning	Mode time period / Brightness		
	Sensor	Mode time period / Brightness on motion / On-time delay / Brightness after motion		
General				
Ingress Protection	IP65			
Pole Diameter	Ø50~60mm			
Product Dimensions	821 x 450 x 161mm	1015 x 525 x 161mm	1321 x 525 x 161mm	1496 x 685 x 161mm
Photometry				
Luminous Light Distribution				

Ordering Information

Type	Series	Wattage	Sensor Type	Colour Temperature
SSL	-	20 (20W LED light) 30 (30W LED light) 50 (50W LED light) 60 (60W LED light)	M (Microwave)	C (Cool white)
SSL-B60MC: 60W Motion Activated Solar LED Street Light in Cool White				

Included Accessories

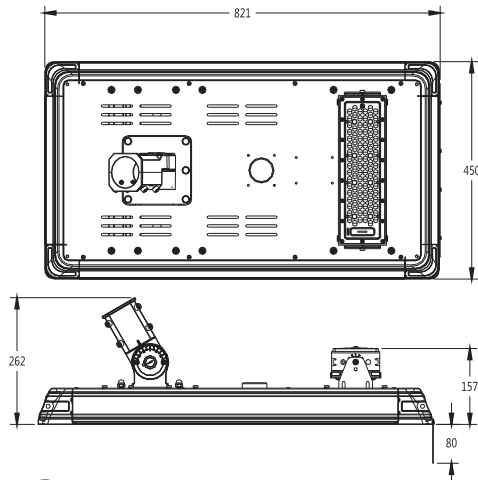
Check status and adjust settings of the SSL-B Series with the included infrared configuration remote.

Control motion sensor operation, battery charge/discharge settings, allocate light power and more.




Series Diagrams


SSL-B20 Dimensions




SSL-B30 Dimensions

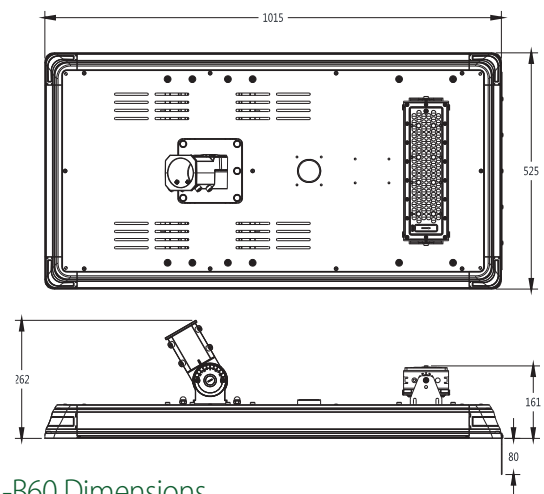


SSL-B50 Dimensions

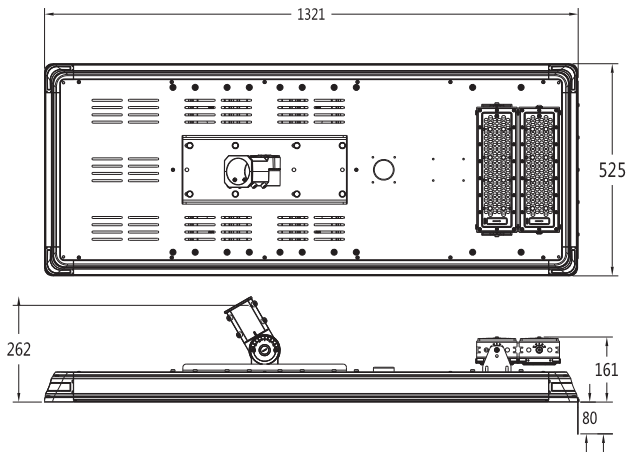


SSL-B60 Dimensions

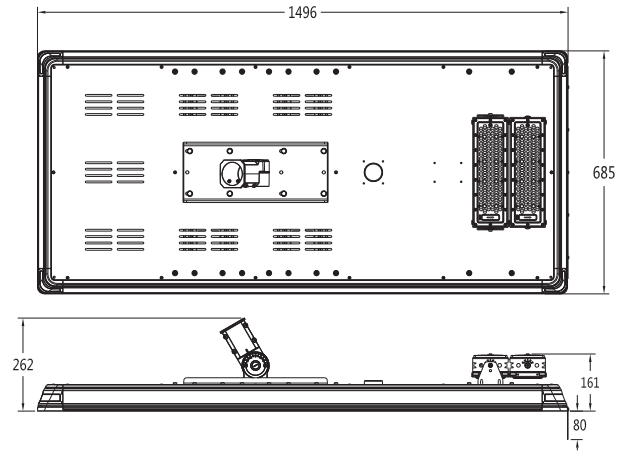

Light Angle Adjustment

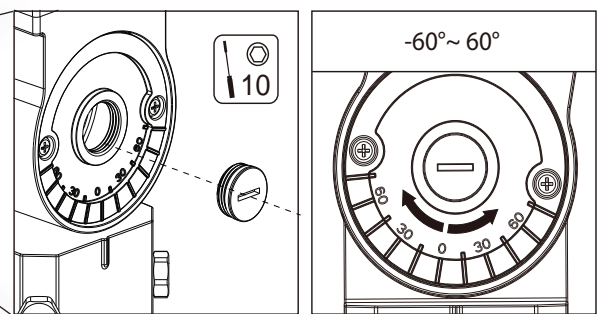

Solar Panel Angle Adjustment

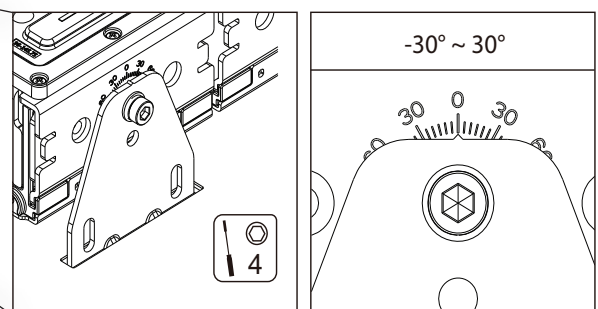



Professional LED Panel Lighting



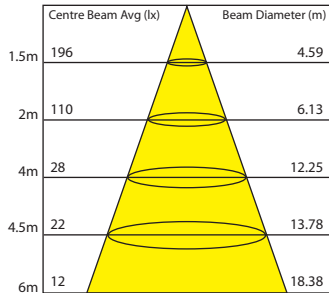
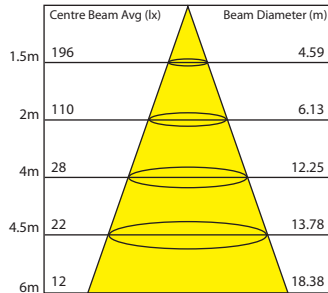
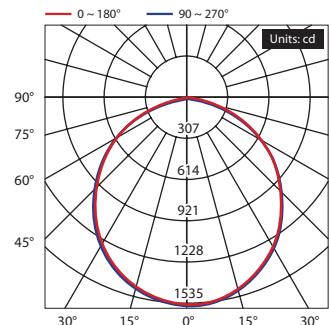
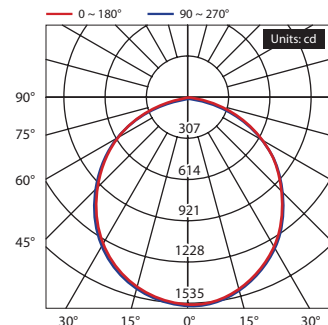
LPL-C series: Low unified glare rating panel lighting in rectangular & square 40W models

ENSA™ LED panel lights are for replacing traditional tube lighting and are best suited for office and business, in medical and educational environments, in conference rooms, and more. These convenient and efficient lights have a standard rectangular profile (1200 x 300mm) and can be easily recessed in tiled ceilings, surface mounted or suspension mounted.

Each ENSA™ LED panel light features a low Unified Glare Rating, providing a pleasing light that isn't distracting or detrimental to workplace productivity. They are the efficient LED upgrade solution for fluorescent tube troffers.

- High luminous efficacy LED flood lighting (120lm/W)
- Minimalist, stylish & efficient 9mm thick LED panel light
- Recessed mounting and surface mounting options
- Wide 110° beam angle for even light distribution
- Low UGR: Create pleasing, low glare, well lit spaces
- Designed to easily replace fluorescent troffer fixtures
- IP20 rated housing for indoor applications only
- Available in 5000K cool white colour temperature





Series Specifications

Model	LPL-C40	LPL-CS40																																				
Product Image																																						
Series Name	LPL-C Series Professional LED Panel Lights	LPL-CS Series Professional LED Panel Lights																																				
Optical																																						
Light Output	4800lm																																					
Luminous Efficacy	120lm/W	100lm/W																																				
Colour Temperature	5000K																																					
Colour Rendering Index	>80																																					
Beam Angle	110°																																					
Light Decay	N/A																																					
Rated Lifespan	N/A																																					
Electrical																																						
Power Consumption	40W																																					
Input Voltage	200 ~ 240VAC																																					
Power Factor	> 0.9																																					
Dimmable	N/A																																					
General																																						
Ingress Protection	IP20																																					
Plug / Socket / Base	3-pin AC plug																																					
Reflector / Diffuser	Frosted diffuser with UGR <22																																					
Housing Adjustments	Recessed (standard) / Surface Frame (LPL-C-S) / Recessed Frame (LPL-C-R)	Recessed (standard) / Surface Frame (LPL-CS-S) / Recessed Frame (LPL-CS-R)																																				
Operating Environment	-25°C ~ 40°C / 10% ~ 90%RH																																					
Dimensions	295 x 1195 x 9mm	595 x 595 x 9mm																																				
Certifications	ENEC/CB approved																																					
Photometry																																						
Illuminance at a Distance	 <table><thead><tr><th>Distance (m)</th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>1.5m</td><td>196</td><td>4.59</td></tr><tr><td>2m</td><td>110</td><td>6.13</td></tr><tr><td>4m</td><td>28</td><td>12.25</td></tr><tr><td>4.5m</td><td>22</td><td>13.78</td></tr><tr><td>6m</td><td>12</td><td>18.38</td></tr></tbody></table>	Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)	1.5m	196	4.59	2m	110	6.13	4m	28	12.25	4.5m	22	13.78	6m	12	18.38	 <table><thead><tr><th>Distance (m)</th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>1.5m</td><td>196</td><td>4.59</td></tr><tr><td>2m</td><td>110</td><td>6.13</td></tr><tr><td>4m</td><td>28</td><td>12.25</td></tr><tr><td>4.5m</td><td>22</td><td>13.78</td></tr><tr><td>6m</td><td>12</td><td>18.38</td></tr></tbody></table>	Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)	1.5m	196	4.59	2m	110	6.13	4m	28	12.25	4.5m	22	13.78	6m	12	18.38
Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)																																				
1.5m	196	4.59																																				
2m	110	6.13																																				
4m	28	12.25																																				
4.5m	22	13.78																																				
6m	12	18.38																																				
Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)																																				
1.5m	196	4.59																																				
2m	110	6.13																																				
4m	28	12.25																																				
4.5m	22	13.78																																				
6m	12	18.38																																				
Luminous Light Distribution	 <p>0 ~ 180° 90 ~ 270° Units: cd</p>	 <p>0 ~ 180° 90 ~ 270° Units: cd</p>																																				

Ordering Information

Type	Series	Wattage	Colour Temperature
LPL	-	C Rectangular CS Square	40 (40W) - C (Cool white)
LPL-C40-C: 40W LED Panel Light in Cool White			

Accessories

Model	LPL-C-S	LPL-CS-S	LPL-C-R	LPL-CS-R
Product Image				
Type	Surface mount frame		Recessed mount frame	
Description	Recessed mounted frame suitable for flat ceiling installations		Surface mounted frame suitable for concealed installations in ceilings	



Intelligent Sensor LED Batten Lighting



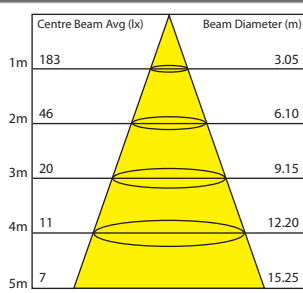
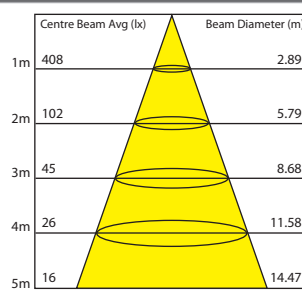
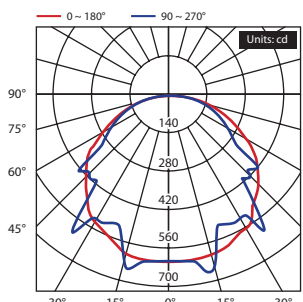
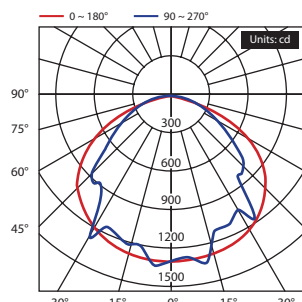
LEDBTS Series: 18W and 36W sensor battens in standard 600mm & 1200mm models

The ENSA™ LED batten light series comprises truly customisable energy efficient lighting solutions that deliver unparalleled control over your lighting, without the need for a complex management system.

Each LED batten uses a fully-configurable ambient light sensor, 5.8GHz microwave motion sensor and light on-timer in tandem, achieving impressively low total energy consumption when compared to traditional twin-batten fluorescent tubes. They are perfect for areas with intermittent people traffic such as in stairwells, corridors, underpasses, car parks and more.

- Tailor your light use to further compound energy savings
- Adjustable light & motion sensing with on-time control
- Sensor can detect motion through glass and thin walls
- Built tough housing: IP65 dust and weather resistant
- Control standby mode: completely off or half brightness
- Long lifespan LED lighting: rated for up to 50,000 hours

Series Specifications

Model	LEDBT18WS		LEDBT36WS																																				
Product Image																																							
Series Name	LEDBTS Series: Standard LED Smart Batten																																						
Optical																																							
Light Output	1350lm		3240lm																																				
Luminous Efficacy	75lm/W		90lm/W																																				
Colour Temperature	6000K																																						
Colour Rendering Index	> 70																																						
Beam Angle	140°																																						
Light Decay	< 15% at 20,000 hours																																						
Rated Lifespan	> 50,000 hours																																						
Electrical																																							
Power Consumption	18W		36W																																				
Input Voltage	220 ~ 240VAC (50Hz)																																						
Power Factor	> 0.9																																						
Dimmable	N/A																																						
Detection																																							
Ambient Light Sensor	3 ~ 2000lx (adjustable)																																						
Motion Detection	360° Microwave (5.8GHz) / 8m radius (adjustable)																																						
On-Time Delay	10s ~ 12min (adjustable)																																						
Standby Light Modes	Off (0% brightness)																																						
General																																							
Ingress Protection	IP65																																						
Plug / Socket / Base	Internal terminal block																																						
Reflector / Diffuser	Clear polycarbonate diffuser / Metal clips																																						
Operating Environment	-20° ~ 50°C																																						
Dimensions	600 x 86 x 65mm		1200 x 95 x 80mm																																				
Photometry																																							
Illuminance at a Distance																																							
	<table><thead><tr><th>Distance (m)</th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>1m</td><td>183</td><td>3.05</td></tr><tr><td>2m</td><td>46</td><td>6.10</td></tr><tr><td>3m</td><td>20</td><td>9.15</td></tr><tr><td>4m</td><td>11</td><td>12.20</td></tr><tr><td>5m</td><td>7</td><td>15.25</td></tr></tbody></table>		Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)	1m	183	3.05	2m	46	6.10	3m	20	9.15	4m	11	12.20	5m	7	15.25	<table><thead><tr><th>Distance (m)</th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>1m</td><td>408</td><td>2.89</td></tr><tr><td>2m</td><td>102</td><td>5.79</td></tr><tr><td>3m</td><td>45</td><td>8.68</td></tr><tr><td>4m</td><td>26</td><td>11.58</td></tr><tr><td>5m</td><td>16</td><td>14.47</td></tr></tbody></table>		Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)	1m	408	2.89	2m	102	5.79	3m	45	8.68	4m	26	11.58	5m	16
Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)																																					
1m	183	3.05																																					
2m	46	6.10																																					
3m	20	9.15																																					
4m	11	12.20																																					
5m	7	15.25																																					
Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)																																					
1m	408	2.89																																					
2m	102	5.79																																					
3m	45	8.68																																					
4m	26	11.58																																					
5m	16	14.47																																					
Luminous Light Distribution																																							
	<table><thead><tr><th>Angle (°)</th><th>0 ~ 180° (cd)</th><th>90 ~ 270° (cd)</th></tr></thead><tbody><tr><td>90°</td><td>140</td><td>140</td></tr><tr><td>75°</td><td>280</td><td>280</td></tr><tr><td>60°</td><td>420</td><td>420</td></tr><tr><td>45°</td><td>560</td><td>560</td></tr><tr><td>30°</td><td>700</td><td>700</td></tr></tbody></table>		Angle (°)	0 ~ 180° (cd)	90 ~ 270° (cd)	90°	140	140	75°	280	280	60°	420	420	45°	560	560	30°	700	700	<table><thead><tr><th>Angle (°)</th><th>0 ~ 180° (cd)</th><th>90 ~ 270° (cd)</th></tr></thead><tbody><tr><td>90°</td><td>300</td><td>300</td></tr><tr><td>75°</td><td>600</td><td>600</td></tr><tr><td>60°</td><td>900</td><td>900</td></tr><tr><td>45°</td><td>1200</td><td>1200</td></tr><tr><td>30°</td><td>1500</td><td>1500</td></tr></tbody></table>		Angle (°)	0 ~ 180° (cd)	90 ~ 270° (cd)	90°	300	300	75°	600	600	60°	900	900	45°	1200	1200	30°	1500
Angle (°)	0 ~ 180° (cd)	90 ~ 270° (cd)																																					
90°	140	140																																					
75°	280	280																																					
60°	420	420																																					
45°	560	560																																					
30°	700	700																																					
Angle (°)	0 ~ 180° (cd)	90 ~ 270° (cd)																																					
90°	300	300																																					
75°	600	600																																					
60°	900	900																																					
45°	1200	1200																																					
30°	1500	1500																																					

Ordering Information

Type	Wattage	Features
LEDBT	18W (18W) 36W (36W)	S (Sensor batten)
LEDBT36WS: 36W LED Intelligent Batten Light		



Intelligent LED Batten Lighting with Backup

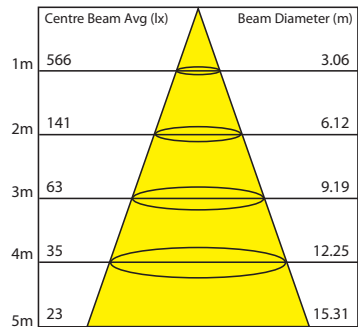
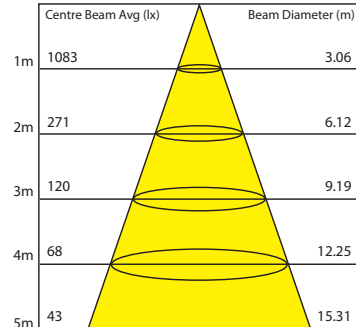
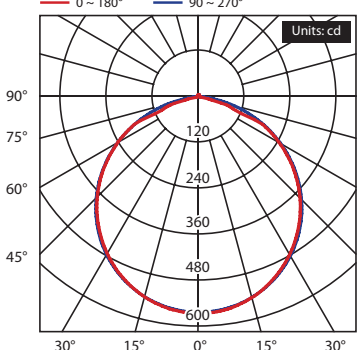
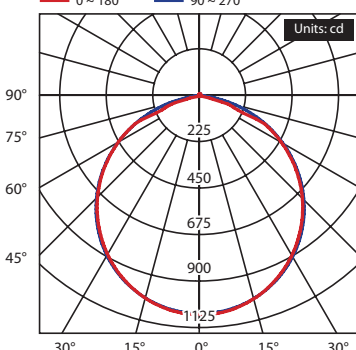
LEDBTWS2 / SE Series: 18W and 36W battens in standard or battery backup models

The ENSA™ LED batten light series comprises customisable energy efficient lighting solutions that deliver control over your lighting, without the need for a complex management system. Models are available as standard sensor batten lights or as an emergency sensor batten light fitted with an emergency backup battery for up to 5 hours light uptime.

Intelligent emergency battens feature motion detection, on-time delay and standby time delay functions to tailor your light use for efficiency & practicality. Each model features 2-stage dimming and can be configured to stay at 100% brightness, to dim and then turn off, or to dim and stay dimmed. Ideal in stairwells, corridors, underpasses, car parks and more.

- 18 / 36W LED batten lights in standard & intelligent models
- Tailor your light use to further compound energy savings
- Adjustable light-use controls such as on-time delay
- Sensor can detect motion through glass and thin walls
- Built with tough housing: IP65 dust & weather resistant
- Emergency lighting models are AS2293.3 approved.
- Easy access TEST button for emergency light testing
- Series is IPART approved for use in the NSW ESS

Series Specifications

Model	LEDBT18WS2		LEDBT18WSE	
Series Name	LEDBTS2 Series: Standard LED Batten		LEDBTSE Series: Battery Backup LED Batten	
Optical				
Light Output	1980lm	3900lm	1980lm	3900lm
Luminous Efficacy	110lm/W	108lm/W	110lm/W	108lm/W
Colour Temperature	6000K			
Colour Rendering Index	> 80			
Beam Angle	126°	123°	126°	123°
Light Decay	L70 at 54,000 hours			
Rated Lifespan	54,000 hours			
Electrical				
Power Consumption	18W	36W	18W	36W
Input Voltage	180 ~ 240VAC (50 ~ 60Hz)			
Power Factor	>0.9		>0.95	
Battery Backup	N/A		6.4V 3000mAh LiFePO4	
Emergency Power Output	N/A		3.6W / 5 hours uptime	
Control				
Motion Detection	360° 5.8GHz Microwave / 8m max. radius / 50% ~ 100% adjustable (default: 100%)			
On-Time Delay	5s / 30s / 90s / 180s (default: 90s)			
Dimmed Brightness	20% / 40% / 60% / 100% (default: 20%)			
Dimming Timeout	0s / 90s / 180s / ∞s (default: ∞s)			
Dimming Description	Turn off / Time delay / Always on			
General				
Ingress Protection	IP65			
Plug / Socket / Base	Internal terminal block			
Installation Materials	Mounting clips, wall screws & plugs			
Reflector / Diffuser	Frosted diffuser			
Operating Environment	-20° ~ 40°C			
Dimensions	655 x 108 x 85mm	1260 x 108 x 85mm	655 x 108 x 85mm	1260 x 108 x 85mm
Certifications	IPART			
Photometry	18W models		36W models	
Illuminance at a Distance				
				

Ordering Information

Type	Wattage	Features
LEDBT	18W (18W) 36W (36W)	S2 (Non-emergency sensor batten) SE (Emergency sensor batten)
LEDBT36WSE: 36W LED Sensor Batten with Backup Battery		



Intelligent LED Oyster Lighting with Backup




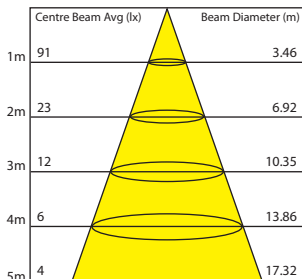
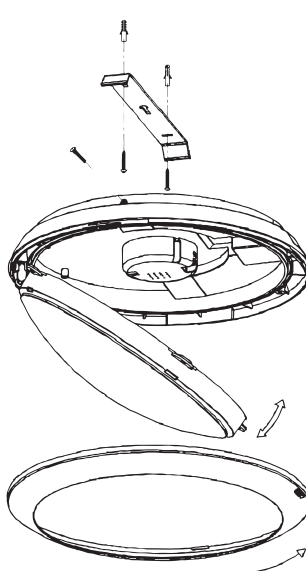
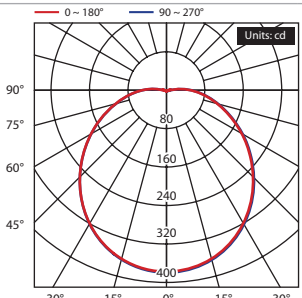
LOL-A Series: 16W LED oyster lights in standard, intelligent & backup battery models

The LOL-A oyster light series delivers efficient lighting to any environment. Available in warm or cool white colour temperatures as a standard light, with an intelligent sensor or with an intelligent sensor plus emergency backup battery.

The series features a wide 120° beam coverage and a frosted diffuser to reduce glare. The intelligent oyster light models feature three smart ways to customise your lighting with a fully-configurable ambient light sensor, 5.8GHz microwave motion sensor and light on-timer in tandem. This makes them the perfect lighting solution for areas with intermittent traffic such as in apartment complexes, stairwells, walkways, campuses and more.

- Tailor your light use to further compound energy savings.
- Adjustable light-use controls such as on-time delay.
- Sensor can detect motion through glass and thin walls.
- Robust IP66/IK10 weather & vandal resistant housing.
- Modern design with frosted diffuser and white surround.
- Long lifespan LED lighting: rated for up to 30,000 hours.

Series Specifications

Model	LOL-A16		LOL-A16-S	LOL-A16-SE
Product Image				
Series Name	LOL-A Series: LED Oyster Lights			
Optical				
Light Output	1200lm			
Luminous Efficacy	75lm/W			
Colour Temperature	3000K / 5000K			
Colour Rendering Index	> 80			
Beam Angle	120°			
Light Decay	< 15% at 10,000 hours			
Rated Lifespan	30,000 hours			
Electrical				
Power Consumption	16W			
Input Voltage	220 ~ 240VAC (50Hz)			
Power Factor	> 0.9			
Dimmable	N/A			
Battery Backup	N/A		N/A	3.7V 1500mAh NiMH >300min uptime at 1.2W
Emergency Brightness	N/A		N/A	20% sensing / 100% on detection
Detection				
Ambient Light Sensor	N/A		< 3 ~ 2000lx (adjustable)	< 5 ~ 2000lx (adjustable)
Motion Detection	N/A		360° Microwave (5.8GHz) / 8m radius (adjustable)	
On-Time Delay	N/A		10s ~ 12min (adjustable)	10s ~ 10min (adjustable)
Standby Light Modes	N/A		0s / 90s/ 5m / 10m / 30m / ∞ (20% brightness)	0s / 90s/ 5m / 10m / ∞ (20% brightness)
General				
Ingress Protection	IP66			
Vandal Resistance	IK10			
Plug / Socket / Base	Internal terminal block			
Reflector / Diffuser	Frosted diffuser			
Operating Environment	-20° ~ 50°C			
Dimensions	Ø300 x 95mm			
Photometry				
Illuminance at a Distance		Diagrams		
		<div>Assembly</div> 		
				

Ordering Information

Type	Series	Wattage	Colour Temperature	Features
LOL	-	A	16 (16W)	-
			W (Warm white)	S (Sensor)
			C (Cool white)	SE (Sensor & backup battery)
LOL-A16-CSE: 16W LED Oyster Light in Cool White with Sensor & Backup Battery				



Professional T8 LED Tube Lighting




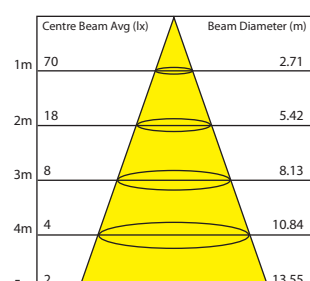
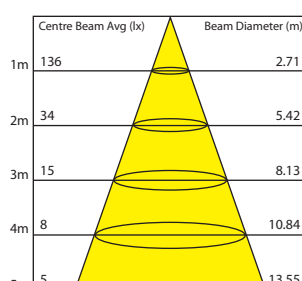
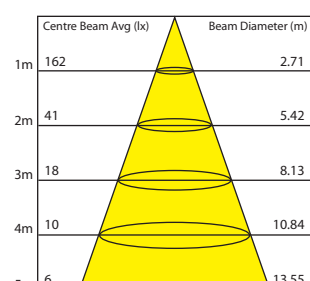
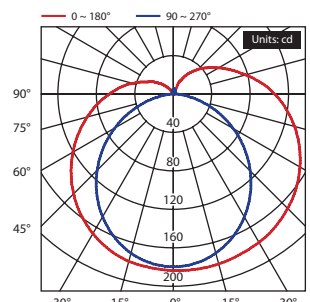
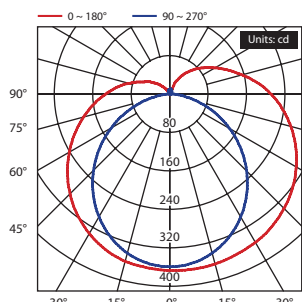
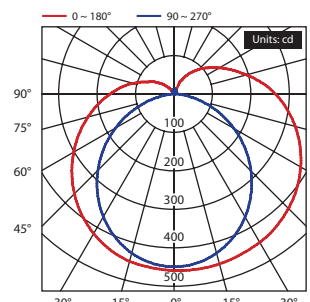
LTU-A Series: High performance LED tubes in 600mm, 1200mm and 1500mm models

The ENSA™ LED tube light series is designed to reduce your fluorescent tube lighting costs by a minimum of 50% and are available in 600mm (2ft), 1200mm (4ft) and 1500mm (5ft) lengths. LTU-A series tubes are more than just energy efficient options to conventional fluorescents. They also deliver better quality & longer lasting light with no UV, they do not require a magnetic or electronic ballast, they turn on/off instantly with no warm up period, they do not fade or flicker, and are 100% recyclable with no mercury or toxic materials.

Each tube features an AC input at one end only and is supplied with an LED starter to replace fluorescent tube fuses.

- Cut your energy use in half by switching to LED tubes.
- High luminous efficacy for optimal return on investment.
- Long lifespan LED lighting: rated for up to 50,000 hours.
- Retrofit or replace: ideal for car parks, offices and more.
- Polycarbonate for low risk of shock (standard model only)
- Supplied with replacement LED starter.

Series Specifications

Model	LTU-A9		LTU-A18		LTU-A22																																																						
Product Image																																																											
Series Name	LTU-A Series T8 LED Tube Lights																																																										
Optical																																																											
Light Output	900lm		1800lm		2200lm																																																						
Luminous Efficacy			100lm/W																																																								
Colour Temperature			6000K																																																								
Colour Rendering Index			> 80																																																								
Beam Angle			140°																																																								
Light Decay			< 3% at 6,000 hours																																																								
Rated Lifespan			> 50,000 hours																																																								
Electrical																																																											
Power Consumption	9W		18W		22W																																																						
Input Voltage			100 ~ 240VAC																																																								
Power Factor			> 0.9																																																								
Dimmable			N/A																																																								
Detection																																																											
Motion Detection			N/A																																																								
On-Time Delay			N/A																																																								
Standby Light Modes			N/A																																																								
General																																																											
Plug / Socket / Base			T8 size / G13 base																																																								
Reflector / Diffuser			Frosted diffuser																																																								
Housing Construction			Polycarbonate																																																								
Operating Environment			-35° ~ 55°C																																																								
Dimensions	Ø26 x 588mm		Ø26 x 1198mm		Ø26 x 1498mm																																																						
Photometry																																																											
Illuminance at a Distance																																																											
	<table><thead><tr><th></th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>1m</td><td>70</td><td>2.71</td></tr><tr><td>2m</td><td>18</td><td>5.42</td></tr><tr><td>3m</td><td>8</td><td>8.13</td></tr><tr><td>4m</td><td>4</td><td>10.84</td></tr><tr><td>5m</td><td>2</td><td>13.55</td></tr></tbody></table>			Centre Beam Avg (lx)	Beam Diameter (m)	1m	70	2.71	2m	18	5.42	3m	8	8.13	4m	4	10.84	5m	2	13.55	<table><thead><tr><th></th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>1m</td><td>136</td><td>2.71</td></tr><tr><td>2m</td><td>34</td><td>5.42</td></tr><tr><td>3m</td><td>15</td><td>8.13</td></tr><tr><td>4m</td><td>8</td><td>10.84</td></tr><tr><td>5m</td><td>5</td><td>13.55</td></tr></tbody></table>			Centre Beam Avg (lx)	Beam Diameter (m)	1m	136	2.71	2m	34	5.42	3m	15	8.13	4m	8	10.84	5m	5	13.55	<table><thead><tr><th></th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>1m</td><td>162</td><td>2.71</td></tr><tr><td>2m</td><td>41</td><td>5.42</td></tr><tr><td>3m</td><td>18</td><td>8.13</td></tr><tr><td>4m</td><td>10</td><td>10.84</td></tr><tr><td>5m</td><td>6</td><td>13.55</td></tr></tbody></table>			Centre Beam Avg (lx)	Beam Diameter (m)	1m	162	2.71	2m	41	5.42	3m	18	8.13	4m	10	10.84	5m	6
	Centre Beam Avg (lx)	Beam Diameter (m)																																																									
1m	70	2.71																																																									
2m	18	5.42																																																									
3m	8	8.13																																																									
4m	4	10.84																																																									
5m	2	13.55																																																									
	Centre Beam Avg (lx)	Beam Diameter (m)																																																									
1m	136	2.71																																																									
2m	34	5.42																																																									
3m	15	8.13																																																									
4m	8	10.84																																																									
5m	5	13.55																																																									
	Centre Beam Avg (lx)	Beam Diameter (m)																																																									
1m	162	2.71																																																									
2m	41	5.42																																																									
3m	18	8.13																																																									
4m	10	10.84																																																									
5m	6	13.55																																																									
Luminous Light Distribution																																																											
	<table><thead><tr><th></th><th>0 ~ 180°</th><th>90 ~ 270°</th></tr></thead><tbody><tr><td>90°</td><td>40</td><td>40</td></tr><tr><td>75°</td><td>80</td><td>80</td></tr><tr><td>60°</td><td>120</td><td>120</td></tr><tr><td>45°</td><td>160</td><td>160</td></tr><tr><td>30°</td><td>200</td><td>200</td></tr></tbody></table>			0 ~ 180°	90 ~ 270°	90°	40	40	75°	80	80	60°	120	120	45°	160	160	30°	200	200	<table><thead><tr><th></th><th>0 ~ 180°</th><th>90 ~ 270°</th></tr></thead><tbody><tr><td>90°</td><td>80</td><td>80</td></tr><tr><td>75°</td><td>160</td><td>160</td></tr><tr><td>60°</td><td>240</td><td>240</td></tr><tr><td>45°</td><td>320</td><td>320</td></tr><tr><td>30°</td><td>400</td><td>400</td></tr></tbody></table>			0 ~ 180°	90 ~ 270°	90°	80	80	75°	160	160	60°	240	240	45°	320	320	30°	400	400	<table><thead><tr><th></th><th>0 ~ 180°</th><th>90 ~ 270°</th></tr></thead><tbody><tr><td>90°</td><td>100</td><td>100</td></tr><tr><td>75°</td><td>200</td><td>200</td></tr><tr><td>60°</td><td>300</td><td>300</td></tr><tr><td>45°</td><td>400</td><td>400</td></tr><tr><td>30°</td><td>500</td><td>500</td></tr></tbody></table>			0 ~ 180°	90 ~ 270°	90°	100	100	75°	200	200	60°	300	300	45°	400	400	30°	500
	0 ~ 180°	90 ~ 270°																																																									
90°	40	40																																																									
75°	80	80																																																									
60°	120	120																																																									
45°	160	160																																																									
30°	200	200																																																									
	0 ~ 180°	90 ~ 270°																																																									
90°	80	80																																																									
75°	160	160																																																									
60°	240	240																																																									
45°	320	320																																																									
30°	400	400																																																									
	0 ~ 180°	90 ~ 270°																																																									
90°	100	100																																																									
75°	200	200																																																									
60°	300	300																																																									
45°	400	400																																																									
30°	500	500																																																									

Ordering Information

Type	Series	Wattage	Colour Temperature
LTU	-	A	9 (9W) 18 (18W) 22 (22W)
			- CW (Cool white)
LTU-A18-CW: 18W LED Tube Light in Cool White			



T8 LED Motion Sensor Tube Lighting



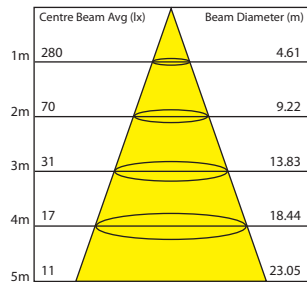
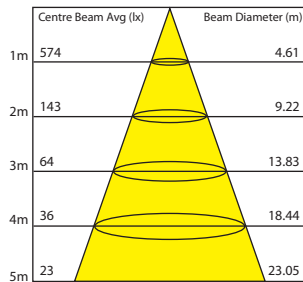
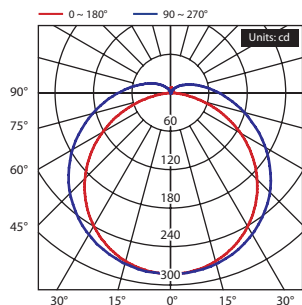
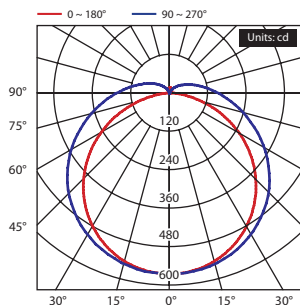
LTU-C Series: PIR motion LED sensor tubes in 600mm and 1200mm models

Compound your LED energy savings by choosing ENSA™ Intelligent LED Tube Lighting which are not only 50% more energy efficient than conventional fluorescents, but utilise motion sensor technology to achieve impressively low total energy consumption. This makes them the perfect energy efficient light for areas with intermittent people traffic such as in apartment complexes, stairwells, walkways, university campuses and more.

LTU-C series tubes do not require a magnetic or electronic ballast, and each tube features an AC input at one end only and is supplied with an LED starter to replace fluorescent tube fuses. (*see installation diagrams*)

- Cut your energy use in half by switching to LED tubes.
- 360° passive infrared motion detection up to 8m radius.
- 60s delay after last detected motion, then dims to 30%.
- High luminous efficacy for optimal return on investment.
- Long lifespan LED lighting: rated for up to 50,000 hours.
- Supplied with replacement LED starter.

Series Specifications

Model	LTU-C9-CS		LTU-C18-CS	
Product Image				
Series Name	LTU-C Series T8 LED Motion Sensor Tube Lights			
Optical				
Light Output	750lm		1800lm	
Luminous Efficacy	83lm/W		100lm/W	
Colour Temperature	6000K			
Colour Rendering Index	> 80			
Beam Angle	120°			
Light Decay	< 15% at 20,000 hours			
Rated Lifespan	> 50,000 hours			
Electrical				
Power Consumption	9W		18W	
Input Voltage	85 ~ 265VAC		85 ~ 265VAC	
Power Factor	> 0.92			
Dimmable	Yes			
Detection				
Motion Detection	8m radius			
On-Time Delay	60s			
Standby Light Mode	30% brightness			
General				
Plug / Socket / Base	T8 size / G13 base			
Reflector / Diffuser	Frosted diffuser			
Housing Construction	Polycarbonate & aluminium			
Operating Environment	-25° ~ 40°C			
Dimensions	Ø26 x 600mm		Ø26 x 1200mm	
Photometry				
Illuminance at a Distance				
Luminous Light Distribution				

Ordering Information

Type	Series		Wattage		Colour Temperature	Other Features
LTU	-	C	9 (9W) 18 (18W)	-	C (Cool white)	S (Sensor)
LTU-C18-CS: 18W LED Tube Light in Cool White with PIR Motion Sensing						



Linkable LED Strip Lighting

LEDBR Series: 13W in two colour temperatures, with surface & right angle brackets

The ENSA™ LED linkable strip light range offers energy efficient lighting in a uniquely versatile, slim package. Connect three LED strip lights together for a maximum 3.5m length LED light strip.

Each linkable strip light comes standard with light connectors, connector safety caps, and surface mount and right angle mount clips. The simple mounting clips enable implementation of the linkable strip light across a wide variety of applications including shelf and cabinet lighting, accent lighting, recessed wall-wash lighting and more.

- Unique, energy efficient linkable LED strip lighting.
- Connect up to 3 lights together; easy on/off switch.
- 78lm/W luminous efficacy & 30,000 hours service life.
- Available in 3000K warm white and 6500K cool white.
- Right angle & surface clips enable rapid light installation.
- Wide 135° beam angle and >80 colour rendering index.

Series Specifications

Model	LEDDBR13W														
Product Image															
Series Name	LEDDBR Series: Linkable LED Lighting														
Optical															
Light Output	1050lm														
Luminous Efficacy	78lm/W														
Colour Temperature	3000K / 6500K														
Colour Rendering Index	> 80														
Beam Angle	135°														
Light Decay	<10% at 6,000 hours														
Rated Lifespan	> 30,000 hours														
Electrical															
Power Consumption	13.5W														
Input Voltage	220 ~ 240VAC (50 ~ 60Hz)														
Power Factor	> 0.5														
Dimmable	N/A														
General															
Plug / Socket / Base	3-pin AC plug														
Reflector / Diffuser	Frosted diffuser														
Housing Construction	Polycarbonate & aluminium														
Operating Environment	-25° ~ +40°C														
Dimensions	1170 x 25 x 35mm														
Photometry															
Illuminance at a Distance	<table><thead><tr><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>257</td><td>1.73</td></tr><tr><td>64</td><td>3.46</td></tr><tr><td>29</td><td>5.19</td></tr><tr><td>16</td><td>6.93</td></tr><tr><td>10</td><td>10.39</td></tr></tbody></table>	Centre Beam Avg (lx)	Beam Diameter (m)	257	1.73	64	3.46	29	5.19	16	6.93	10	10.39	Luminous Light Distribution	
Centre Beam Avg (lx)	Beam Diameter (m)														
257	1.73														
64	3.46														
29	5.19														
16	6.93														
10	10.39														
Diagrams															
Mounting Options															

Ordering Information

Type	Wattage	Colour Temperature
LEDDBR	13W (13.5W)	3K (Warm white) 65K (Cool white)
LEDDBR13W65K: 13W LED Linkable Strip Light in Cool White		



Premium Adjustable Body LED Downlights




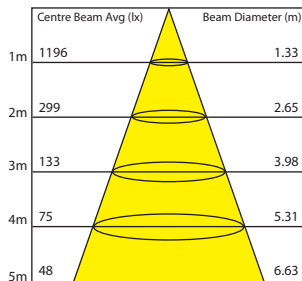
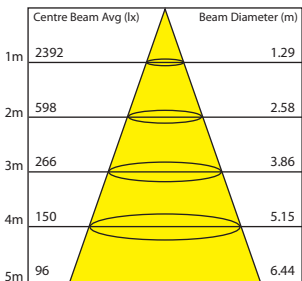
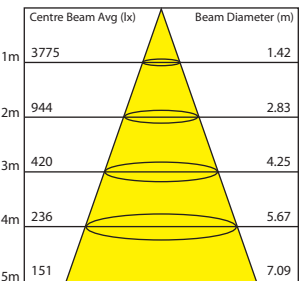
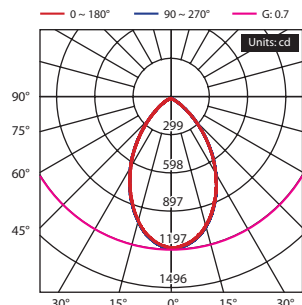
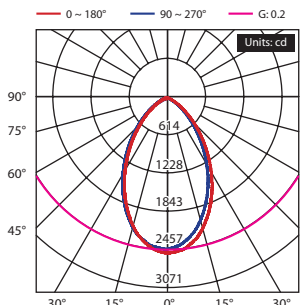
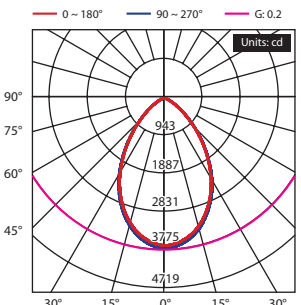
LEDDL Series: Tilt/rotate adjustable circular downlights in 20W, 38W and 60W models

Choose the ENSA™ premium range of adjustable LED downlights for the best in light output, service life, colour rendering accuracy and more. Available in cool and warm white colour temperatures, these downlights utilise high quality Samsung LEDs to provide a minimum of 95lm/W luminous efficacy and up to 50,000 hours rated LED lifespan.

Each downlight in the range can rotate 350° and tilt up to 60°, coupled with a 60° beam angle, these lights are perfect for versatile spot or key lighting in retail spaces, showrooms, foyers, office environments and more.

- Excellent alternative to halogen and metal-halide lamps
- Ideal for use in shopfitting applications & large fitouts
- Versatile: 350° rotation and 60° tilt adjustable housing
- Minimalist, bevelled white gimble downlight surround
- Samsung LEDs for optimal performance & lifespan
- Hole cut size: Ø165mm (20W, 38W) and Ø215mm (60W)

Series Specifications

Model	LEDDL20WxKR		LEDDL38WxKR		LEDDL60WxKR																																																						
Product Image																																																											
Series Name	LEDDL Series: Premium Adjustable Series LED Downlights																																																										
Optical																																																											
Light Output	1890lm		3640lm		6300lm																																																						
Luminous Efficacy	95lm/W		96lm/W		105lm/W																																																						
Colour Temperature	3000K / 5500K																																																										
Colour Rendering Index	> 80																																																										
Beam Angle	60°																																																										
Light Decay	30% at 25,000 hours																																																										
Rated Lifespan	> 50,000 hours																																																										
Electrical																																																											
Power Consumption	20W		38W		60W																																																						
Input Voltage	85 ~ 265VAC																																																										
Power Factor	> 0.9																																																										
Dimmable	N/A																																																										
General																																																											
Plug / Socket / Base	3-pin AC plug with external driver																																																										
Reflector / Diffuser	Frosted diffuser																																																										
Housing Adjustments	Tilt 60°/ Rotate 350°																																																										
Operating Environment	-20°C ~ 40°C																																																										
Dimensions	Ø195 x 175mm				Ø250 x 144mm																																																						
Hole Cut Size	Ø165mm				Ø215mm																																																						
Photometry																																																											
Illuminance at a Distance																																																											
	<table><thead><tr><th>Distance (m)</th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>1m</td><td>1196</td><td>1.33</td></tr><tr><td>2m</td><td>299</td><td>2.65</td></tr><tr><td>3m</td><td>133</td><td>3.98</td></tr><tr><td>4m</td><td>75</td><td>5.31</td></tr><tr><td>5m</td><td>48</td><td>6.63</td></tr></tbody></table>		Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)	1m	1196	1.33	2m	299	2.65	3m	133	3.98	4m	75	5.31	5m	48	6.63	<table><thead><tr><th>Distance (m)</th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>1m</td><td>2392</td><td>1.29</td></tr><tr><td>2m</td><td>598</td><td>2.58</td></tr><tr><td>3m</td><td>266</td><td>3.86</td></tr><tr><td>4m</td><td>150</td><td>5.15</td></tr><tr><td>5m</td><td>96</td><td>6.44</td></tr></tbody></table>		Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)	1m	2392	1.29	2m	598	2.58	3m	266	3.86	4m	150	5.15	5m	96	6.44	<table><thead><tr><th>Distance (m)</th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>1m</td><td>3775</td><td>1.42</td></tr><tr><td>2m</td><td>944</td><td>2.83</td></tr><tr><td>3m</td><td>420</td><td>4.25</td></tr><tr><td>4m</td><td>236</td><td>5.67</td></tr><tr><td>5m</td><td>151</td><td>7.09</td></tr></tbody></table>		Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)	1m	3775	1.42	2m	944	2.83	3m	420	4.25	4m	236	5.67	5m	151
Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)																																																									
1m	1196	1.33																																																									
2m	299	2.65																																																									
3m	133	3.98																																																									
4m	75	5.31																																																									
5m	48	6.63																																																									
Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)																																																									
1m	2392	1.29																																																									
2m	598	2.58																																																									
3m	266	3.86																																																									
4m	150	5.15																																																									
5m	96	6.44																																																									
Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)																																																									
1m	3775	1.42																																																									
2m	944	2.83																																																									
3m	420	4.25																																																									
4m	236	5.67																																																									
5m	151	7.09																																																									
Luminous Light Distribution																																																											
	<p>— 0 ~ 180° — 90 ~ 270° — G: 0.7</p> <p>Units: cd</p>		<p>— 0 ~ 180° — 90 ~ 270° — G: 0.2</p> <p>Units: cd</p>		<p>— 0 ~ 180° — 90 ~ 270° — G: 0.2</p> <p>Units: cd</p>																																																						

Ordering Information

Type	Wattage	Colour Temperature	Other Features
LEDDL	20W (20W) 38W (38W) 60W (60W)	3K (Warm white) 5K (Cool white)	R (Round)
LEDDL20W3KR: 20W Round Adjustable Downlight in Warm White			



Premium Adjustable Body LED Downlights




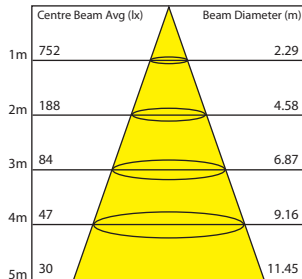
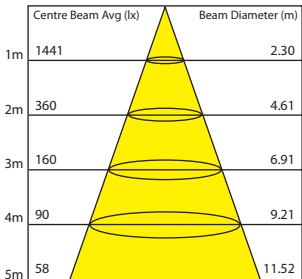
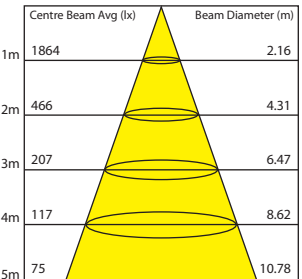
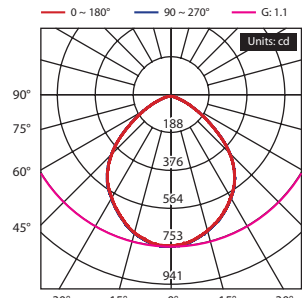
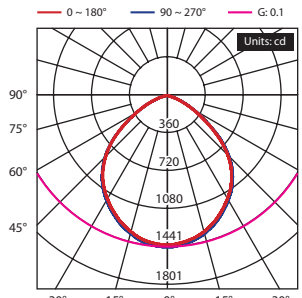
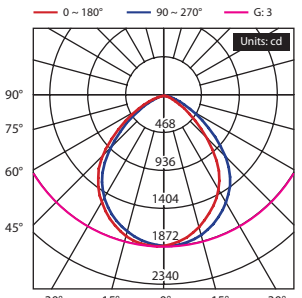
LEDDL5 Series: Tilt adjustable rectangular downlights in 20W, 38W and 48W models

Choose the ENSA™ premium range of adjustable LED downlights for the best in light output, service life, colour rendering accuracy and more. Available in cool and warm white colour temperatures, these downlights utilise high quality LEDs to provide a minimum of 100lm/W luminous efficacy and up to 50,000 hours rated LED lifespan.

Each downlight in the range can tilt up to 60° and features a wide beam angle of 100°. Their rectangular shape and light distribution makes them ideal for bay lighting, signage illumination and wall highlighting, especially in retail environments.

- Excellent alternative to halogen and metal-halide lamps
- Ideal for use in shopfitting applications & large fit-outs
- Excellent colour rendering, lifespan and light output
- Minimalist, bevelled white gimble downlight surround
- 60° tilt adjustable & frosted diffuser for glare reduction
- Uniform hole cut size across range: 227 x 130mm

Series Specifications

Model	LEDDL20WxKS		LEDDL38WxKS		LEDDL48WxKS																																																						
Product Image																																																											
Series Name	LEDDL5 Series: Premium Rectangular Adjustable Series LED Downlights																																																										
Optical																																																											
Light Output	2000lm		3800lm		4800lm																																																						
Luminous Efficacy			100lm/W																																																								
Colour Temperature			2700K / 6500K																																																								
Colour Rendering Index			>80																																																								
Beam Angle			100°																																																								
Light Decay			30% at 25,000 hours																																																								
Rated Lifespan			> 50,000 hours																																																								
Electrical																																																											
Power Consumption	20W		38W		48W																																																						
Input Voltage			220 ~ 240VAC (50 ~ 60Hz)																																																								
Power Factor			> 0.9																																																								
Dimmable			Yes (TRIAC)																																																								
General																																																											
Plug / Socket / Base			3-pin AC plug with external driver																																																								
Reflector / Diffuser			Frosted diffuser																																																								
Housing Adjustments			Tilt 60°																																																								
Operating Environment			-20°C ~ 40°C																																																								
Dimensions			240 x 145 x 135mm																																																								
Hole Cut Size			227 x 130mm																																																								
Photometry																																																											
Illuminance at a Distance																																																											
	<table><thead><tr><th></th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>1m</td><td>752</td><td>2.29</td></tr><tr><td>2m</td><td>188</td><td>4.58</td></tr><tr><td>3m</td><td>84</td><td>6.87</td></tr><tr><td>4m</td><td>47</td><td>9.16</td></tr><tr><td>5m</td><td>30</td><td>11.45</td></tr></tbody></table>			Centre Beam Avg (lx)	Beam Diameter (m)	1m	752	2.29	2m	188	4.58	3m	84	6.87	4m	47	9.16	5m	30	11.45	<table><thead><tr><th></th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>1m</td><td>1441</td><td>2.30</td></tr><tr><td>2m</td><td>360</td><td>4.61</td></tr><tr><td>3m</td><td>160</td><td>6.91</td></tr><tr><td>4m</td><td>90</td><td>9.21</td></tr><tr><td>5m</td><td>58</td><td>11.52</td></tr></tbody></table>			Centre Beam Avg (lx)	Beam Diameter (m)	1m	1441	2.30	2m	360	4.61	3m	160	6.91	4m	90	9.21	5m	58	11.52	<table><thead><tr><th></th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>1m</td><td>1864</td><td>2.16</td></tr><tr><td>2m</td><td>466</td><td>4.31</td></tr><tr><td>3m</td><td>207</td><td>6.47</td></tr><tr><td>4m</td><td>117</td><td>8.62</td></tr><tr><td>5m</td><td>75</td><td>10.78</td></tr></tbody></table>			Centre Beam Avg (lx)	Beam Diameter (m)	1m	1864	2.16	2m	466	4.31	3m	207	6.47	4m	117	8.62	5m	75
	Centre Beam Avg (lx)	Beam Diameter (m)																																																									
1m	752	2.29																																																									
2m	188	4.58																																																									
3m	84	6.87																																																									
4m	47	9.16																																																									
5m	30	11.45																																																									
	Centre Beam Avg (lx)	Beam Diameter (m)																																																									
1m	1441	2.30																																																									
2m	360	4.61																																																									
3m	160	6.91																																																									
4m	90	9.21																																																									
5m	58	11.52																																																									
	Centre Beam Avg (lx)	Beam Diameter (m)																																																									
1m	1864	2.16																																																									
2m	466	4.31																																																									
3m	207	6.47																																																									
4m	117	8.62																																																									
5m	75	10.78																																																									
Luminous Light Distribution																																																											
	<p>— 0 ~ 180° — 90 ~ 270° — G: 1:1</p> <p>Units: cd</p>		<p>— 0 ~ 180° — 90 ~ 270° — G: 0:1</p> <p>Units: cd</p>		<p>— 0 ~ 180° — 90 ~ 270° — G: 3</p> <p>Units: cd</p>																																																						

Ordering Information

Type	Wattage	Colour Temperature	Other Features
LEDDL	20W (20W) 38W (38W) 48W (48W)	3K (Warm white) 5K (Cool white)	S (Rectangular)
LEDDL20W5KS: 20W Rectangular Adjustable Downlight in Cool White			



Premium Fixed Body LED Downlights




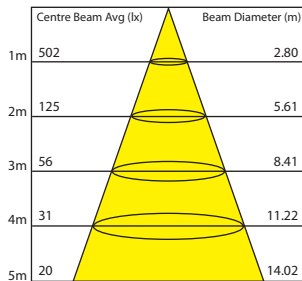
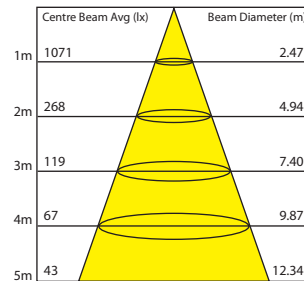
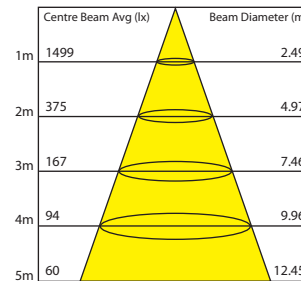
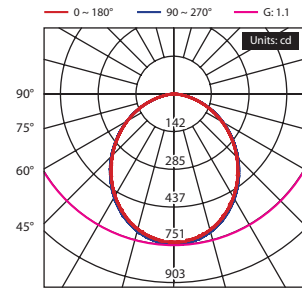
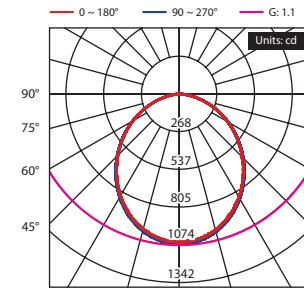
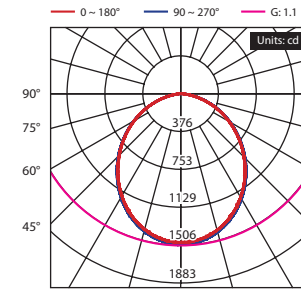
LEDDL RD Series: Dimmable downlights in 20W, 36W and 48W, in two colour temperatures

Choose the ENSA™ premium range of fixed LED downlights for the best in light output, service life, colour rendering accuracy and more. Available in cool and warm white colour temperatures, these downlights utilise high quality Samsung LEDs to provide a minimum of 92lm/W luminous efficacy and up to 50,000 hours rated LED lifespan.

With a 100° beam angle and circular light distribution, these lights are designed to provide evenly distributed, high quality light perfect for general purpose illumination in store fit-outs, galleries, residential and office environments and more.

- 100lm/W high efficiency, low energy use LED downlights
- 6" and 8" total diameter, suitable for retrofit installations
- Excellent colour rendering, lifespan and light output
- Minimalist, bevelled white gimble downlight surround
- Each downlight model features TRIAC dimming
- Hole cut size: Ø165mm (20W, 36W) and Ø205mm (48W)

Series Specifications

Model	LEDDL20WxK6RD		LEDDL36WxK6RD		LEDDL48WxK8RD																																																						
Product Image																																																											
Series Name	LEDDL RD Series: Premium Fixed Dimmable Series LED Downlights																																																										
Optical																																																											
Light Output	1900lm		3370lm		4600lm																																																						
Luminous Efficacy	105lm/W		94lm/W		96lm/W																																																						
Colour Temperature	2700K / 6500K																																																										
Colour Rendering Index	> 80																																																										
Beam Angle	60°																																																										
Light Decay	30% at 25,000 hours																																																										
Rated Lifespan	>50,000 hours																																																										
Electrical																																																											
Power Consumption	20W		36W		48W																																																						
Input Voltage	100 ~ 240VAC																																																										
Power Factor	> 0.9																																																										
Dimmable	Yes (TRIAC)																																																										
General																																																											
Plug / Socket / Base	3-pin AC plug with external driver																																																										
Reflector / Diffuser	Frosted diffuser																																																										
Housing Adjustments	N/A																																																										
Operating Environment	-20 ~ +40°C																																																										
Dimensions	Ø195x 56mm				Ø245 x 54mm																																																						
Hole Cut Size	Ø165mm				Ø205mm																																																						
Photometry																																																											
Illuminance at a Distance																																																											
	<table><thead><tr><th>Distance (m)</th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>1m</td><td>502</td><td>2.80</td></tr><tr><td>2m</td><td>125</td><td>5.61</td></tr><tr><td>3m</td><td>56</td><td>8.41</td></tr><tr><td>4m</td><td>31</td><td>11.22</td></tr><tr><td>5m</td><td>20</td><td>14.02</td></tr></tbody></table>		Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)	1m	502	2.80	2m	125	5.61	3m	56	8.41	4m	31	11.22	5m	20	14.02	<table><thead><tr><th>Distance (m)</th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>1m</td><td>1071</td><td>2.47</td></tr><tr><td>2m</td><td>268</td><td>4.94</td></tr><tr><td>3m</td><td>119</td><td>7.40</td></tr><tr><td>4m</td><td>67</td><td>9.87</td></tr><tr><td>5m</td><td>43</td><td>12.34</td></tr></tbody></table>		Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)	1m	1071	2.47	2m	268	4.94	3m	119	7.40	4m	67	9.87	5m	43	12.34	<table><thead><tr><th>Distance (m)</th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>1m</td><td>1499</td><td>2.49</td></tr><tr><td>2m</td><td>375</td><td>4.97</td></tr><tr><td>3m</td><td>167</td><td>7.46</td></tr><tr><td>4m</td><td>94</td><td>9.96</td></tr><tr><td>5m</td><td>60</td><td>12.45</td></tr></tbody></table>		Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)	1m	1499	2.49	2m	375	4.97	3m	167	7.46	4m	94	9.96	5m	60
Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)																																																									
1m	502	2.80																																																									
2m	125	5.61																																																									
3m	56	8.41																																																									
4m	31	11.22																																																									
5m	20	14.02																																																									
Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)																																																									
1m	1071	2.47																																																									
2m	268	4.94																																																									
3m	119	7.40																																																									
4m	67	9.87																																																									
5m	43	12.34																																																									
Distance (m)	Centre Beam Avg (lx)	Beam Diameter (m)																																																									
1m	1499	2.49																																																									
2m	375	4.97																																																									
3m	167	7.46																																																									
4m	94	9.96																																																									
5m	60	12.45																																																									
Luminous Light Distribution																																																											
	<table><thead><tr><th>Beam Angle (°)</th><th>0 ~ 180°</th><th>90 ~ 270°</th><th>G: 1.1</th></tr></thead><tbody><tr><td>90°</td><td>142</td><td>285</td><td>437</td></tr><tr><td>75°</td><td>751</td><td>903</td><td>1342</td></tr></tbody></table>		Beam Angle (°)	0 ~ 180°	90 ~ 270°	G: 1.1	90°	142	285	437	75°	751	903	1342	<table><thead><tr><th>Beam Angle (°)</th><th>0 ~ 180°</th><th>90 ~ 270°</th><th>G: 1.1</th></tr></thead><tbody><tr><td>90°</td><td>268</td><td>537</td><td>805</td></tr><tr><td>75°</td><td>1074</td><td>1342</td><td>1883</td></tr></tbody></table>		Beam Angle (°)	0 ~ 180°	90 ~ 270°	G: 1.1	90°	268	537	805	75°	1074	1342	1883	<table><thead><tr><th>Beam Angle (°)</th><th>0 ~ 180°</th><th>90 ~ 270°</th><th>G: 1.1</th></tr></thead><tbody><tr><td>90°</td><td>376</td><td>753</td><td>1129</td></tr><tr><td>75°</td><td>1506</td><td>1883</td><td>2651</td></tr></tbody></table>		Beam Angle (°)	0 ~ 180°	90 ~ 270°	G: 1.1	90°	376	753	1129	75°	1506	1883	2651																	
Beam Angle (°)	0 ~ 180°	90 ~ 270°	G: 1.1																																																								
90°	142	285	437																																																								
75°	751	903	1342																																																								
Beam Angle (°)	0 ~ 180°	90 ~ 270°	G: 1.1																																																								
90°	268	537	805																																																								
75°	1074	1342	1883																																																								
Beam Angle (°)	0 ~ 180°	90 ~ 270°	G: 1.1																																																								
90°	376	753	1129																																																								
75°	1506	1883	2651																																																								

Ordering Information

Type	Wattage	Colour Temperature	Other Features
LEDDL	20W (20W)	3K (Warm white)	6 / 8 (Ø inches)
	36W (38W)	5K (Cool white)	R (Round)
	48W (48W)		D (Dimmable)
LEDDL48W5K8RD: 48W Round Fixed Dimmable Downlight in Cool White			



LED Retrofit Globe Lighting



LEDBL / GL Series: Variety of wattages in E27, B22, GU10 and GU5.3 style fittings



The ENSA™ LED light globe series provides a variety of energy efficient LED bulbs, ideal for replacing shorter-lifespan, higher energy use incandescent, halogen and compact fluorescent bulbs. They are a perfect lighting solution for general purpose illumination.

Each ENSA™ LED light globe features a frosted diffuser to remove harsh LED glare, is available in cool & warm white temperatures and comes with a 10 year return-to-base warranty (visit www.ensalife.com for full warranty terms)

This series is available in a variety of wattages and base fittings to handle all types of lighting upgrades. Form factors include standard light bulb replacements available in E27 screw base and B22 bayonet fitting, and MR16 downlight bulb replacements in GU5.3 12V bi-pin fitting and GU10 240V bayonet fitting.

Series Specifications

Model	LEDL6WE27	LBL-C9-E27	LEDL11WE27	LEDL6WB22	LBL-D7-B22	LEDL9WB22	LEDL11WB22
Product Image							
Series Name	E27 Screw LED Globe Series			B22 Bayonet LED Globe Series			
Optical							
Light Output	485lm	806lm	1025lm	485lm	630lm	795lm	1025lm
Luminous Efficacy	75lm/W	80lm/W	93lm/W	75lm/W	85lm/W	84lm/W	93lm/W
Colour Temperature	3000K / 6500K			3000K / 6500K	6500K	3000K / 6500K	3000K / 6500K
Colour Rendering Index	>80						
Beam Angle	160°						
Light Decay	<10% at 6,000 hours	<7% at 6,000 hours	<10% at 6,000 hours	<10% at 6,000 hours	<20% at 6,000 hours	<10% at 6,000 hours	<10% at 6,000 hours
Rated Lifespan	30,000 hours	25,000 hours	30,000 hours	30,000 hours	15,000 hours	30,000 hours	30,000 hours
Electrical							
Power Consumption	6.5W	9.5W	11W	6.5W	7W	9.5W	11W
Input Voltage	220 ~ 240VAC						
Power Factor	>0.5						
Dimmable	N/A						
General							
Construction / Material	Aluminium & plastic						
Plug / Socket / Base	E27			B22			
Operating Environment	-25° ~ +40°C	-40° ~ +45°C	-25° ~ +40°C	-20° ~ +40°C			
Dimensions	Ø60 x 107mm						

Model	LEDGL5WMR		LEDGL5WGU	
Product Image				
Series Name	MR16 LED Downlight Series			
Optical				
Light Output	410lm			
Luminous Efficacy	75lm/W			
Colour Temperature	3000K / 6500K			
Colour Rendering Index	>80			
Beam Angle	105°			
Light Decay	<10% after 6,000 hours			
Rated Lifespan	30,000 hours			
Electrical				
Power Consumption	5.5W			
Input Voltage	12VDC		220 ~ 240VAC	
Power Factor	>0.5			
Dimmable	N/A			
General				
Construction / Material	Aluminium & polycarbonate			
Plug / Socket / Base	GU5.3		GU10	
Operating Environment	-25° ~ +40°C			
Dimensions	Ø51 x 50mm		Ø56 x 50mm	

Ordering Information

Type	Wattage	Base Fitting	Colour Temperature
LEDGL	6W (6.5W) 11W (11W)	E27 (E27 Screw) B22 (B22 Bayonet)	3K (Warm white) 65K (Cool white)
LEDGL	5W (5.5W)	GU (GU10 Bayonet) MR (GU5.3 Bi-pin)	3K (Warm white) 65K (Cool white)
LEDGL6WE2765K: 6.5W LED Globe with E27 Base in Cool White			

Type	Series		Wattage	Base Fitting		Colour Temperature
LBL	-	C	9 (9.5W)	-	E27 (E27 Screw)	C (Cool white) W (Warm white)
LBL-C9-E27C: 9.5W LED Globe with E27 Base in Cool White						



LED Retrofit High Bay Lighting



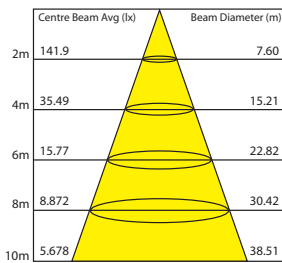
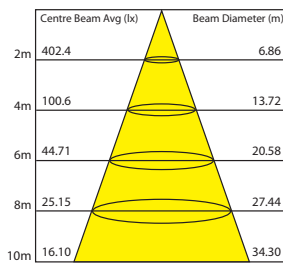
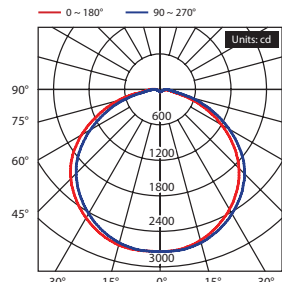
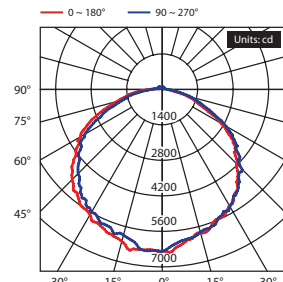
LBL-D Series: Retrofit E40 screw high bay LED bulbs available in 100W and 160W models

The ENSA™ LBL-D series enables rapid, energy efficient lighting upgrades of retail high bay installations in industrial and commercial environments. Quickly and easily replace E40 screw base lamps and save time on replacement with minimal interruption to operations.

The LBL-D series offers a far greater lifespan and energy efficiency than traditional metal halide lighting, saving on energy and lighting replacement costs. Available in 100W & 160W models in cool & natural white colour temperatures.

- High power bulb for industrial and commercial settings
- Improve energy efficiency & save on re-lamping costs
- E40 screw based for retrofit lighting installations
- Long life LEDs: minimum 25,000 hours rated service life
- Available in natural and cool white colour temperatures
- Reflector for high ceiling installations (*sold separately*)
- *There may be some retrofit cases where the existing light ballast must be removed

Series Specifications

Model	LBL-D100-E40		LBL-D160-E40																																					
Product Image																																								
Series Name	LBL-D Series: Retrofit High Bay LED Bulb																																							
Optical																																								
Light Output	9,000lm		20,000lm																																					
Luminous Efficacy	90lm/W		125lm/W																																					
Colour Temperature	4000K / 6500K																																							
Colour Rendering Index	> 80																																							
Beam Angle	120°		200°																																					
Light Decay	<80% at 6000 hours																																							
Rated Lifespan	>25,000 hours																																							
Electrical																																								
Power Consumption	100W		160W																																					
Input Voltage	220 ~ 240VAC, 50Hz																																							
Power Factor	> 0.9																																							
Dimmable	No																																							
General																																								
Construction / Material	Polybutylene Terephthalate (body) / Polycarbonate (lens)																																							
Plug / Socket / Base	E40 screw																																							
Operating Environment	-30 ~ +50°C																																							
Dimensions	Ø190 x 275mm		Ø280 x 350mm																																					
Photometry																																								
Illuminance at a Distance	 <table><thead><tr><th></th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>2m</td><td>141.9</td><td>7.60</td></tr><tr><td>4m</td><td>35.49</td><td>15.21</td></tr><tr><td>6m</td><td>15.77</td><td>22.82</td></tr><tr><td>8m</td><td>8.872</td><td>30.42</td></tr><tr><td>10m</td><td>5.678</td><td>38.51</td></tr></tbody></table>			Centre Beam Avg (lx)	Beam Diameter (m)	2m	141.9	7.60	4m	35.49	15.21	6m	15.77	22.82	8m	8.872	30.42	10m	5.678	38.51	 <table><thead><tr><th></th><th>Centre Beam Avg (lx)</th><th>Beam Diameter (m)</th></tr></thead><tbody><tr><td>2m</td><td>402.4</td><td>6.86</td></tr><tr><td>4m</td><td>100.6</td><td>13.72</td></tr><tr><td>6m</td><td>44.71</td><td>20.58</td></tr><tr><td>8m</td><td>25.15</td><td>27.44</td></tr><tr><td>10m</td><td>16.10</td><td>34.30</td></tr></tbody></table>			Centre Beam Avg (lx)	Beam Diameter (m)	2m	402.4	6.86	4m	100.6	13.72	6m	44.71	20.58	8m	25.15	27.44	10m	16.10	34.30
	Centre Beam Avg (lx)	Beam Diameter (m)																																						
2m	141.9	7.60																																						
4m	35.49	15.21																																						
6m	15.77	22.82																																						
8m	8.872	30.42																																						
10m	5.678	38.51																																						
	Centre Beam Avg (lx)	Beam Diameter (m)																																						
2m	402.4	6.86																																						
4m	100.6	13.72																																						
6m	44.71	20.58																																						
8m	25.15	27.44																																						
10m	16.10	34.30																																						
Luminous Light Distribution	 <p>Units: cd</p>		 <p>Units: cd</p>																																					

Ordering Information

Type	Series		Wattage		Base	Colour Temperature
LBL	-	D	100 (100W) 160 (160W)	-	E40	C (Cool white) N (Natural white)
LBL-D100-E40N: 100W E40 Base LED Retrofit Bulb in Natural White						

Additional Accessories

LBL-D100RF
Optional plastic reflector available for 100W LBL-D Series LED bulbs only. Recommended for high ceiling installations.





LED Retrofit Globe Lighting




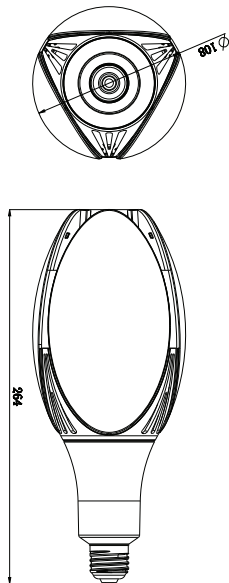
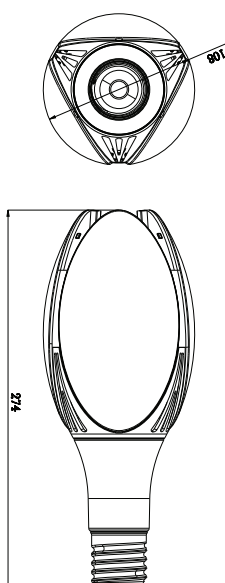
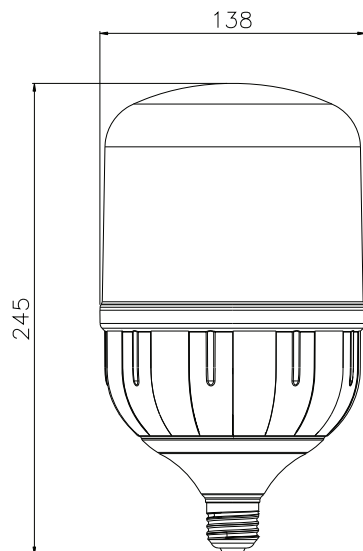
LBL-D Series: Available in 42W and 45W in E27 and E40 screw base fittings.

The ENSA LBL-D Series LED globes deliver rapid energy efficient lighting upgrades without the need to replace entire lighting fixtures. Make lighting upgrades simple with E27 and E40 screw fittings and provide rapid retrofit lighting far more efficiently than traditional compact fluorescent lights.

LBL-D Series retrofit globes are available in two unique designs that fit to traditional light enclosures, making LED upgrades easy. They are ideal across residential, commercial and public spaces and are perfect for general purpose lighting in lamp posts, area lights, gate lamps, architectural lighting, interior lighting and more.

- Improve energy efficiency with up to 120lm/W bulbs
- Low-glare and durable frosted polycarbonate lens
- Available in 4000K natural white colour temperature
- Great lumen maintenance & lifespan up to 25,000 hours
- Two common bulb styles for traditional light enclosures
- Standard E27 and E40 screw fit bulbs; optional converter

Series Specifications

Model	LBL-D42-E27		LBL-D42-E40		LBL-D45-E27	
Product Image						
Series Name	LBL-D Series Retrofit Light Globes					
Optical						
Light Output	5000lm			4500lm		
Luminous Efficacy	120lm/W			100lm/W		
Colour Temperature	4000K					
Colour Rendering Index	>80					
Beam Angle	330°			180°		
Light Decay	<70% after 25,000 hours			<80% after 6000 hours		
Rated Lifespan	25,000 hours					
Electrical						
Power Consumption	42W			45W		
Input Voltage	220 ~ 240VAC 50Hz					
Power Factor	>0.9					
Dimmable	N/A					
General						
Construction / Material	Polyamide body, polycarbonate frosted lens					
Ingress Protection	IP20					
Plug / Socket / Base	E27		E40		E27	
Operating Environment	-20 ~ +40°C					
Dimensions	Ø108 x 264mm		Ø108 x 274mm		Ø138 x 245mm	
Diagram						

Ordering Information

Type	Wattage	Base Fitting	Colour Temperature
LBL-D	42 (42W) 45 (45W)	E27 (E27 Screw) E40 (E40 Screw)	N (Natural white)
LBL-D42-E27 / E40 : 42W LED Globe with E27 / E40 Base in Natural White LBL-D45-E27: 45W LED Globe with E27 Base in Natural White			



Type	Base Fitting
E27-E40BASE	E40 (E40 Screw)
E27-E40BASE: E27 transfer into E40 Base Adapter	



Intelligent Motion Sensor & Dusk/Dawn Switches







ENSA-MS/PS/LC Series: Microwave motion, PIR motion & light sensors in a variety of styles

The ENSA™ intelligent energy saving switch series comprises a wide range of automated, smart switches that use a variety of different sensors to control light use. This innovative combination of sensors ensures your lights will only turn on when you need them to, saving you on power costs and reducing the impact on the environment.

Each intelligent switch features adjustable light sensing, movement sensing & on-timer delay so you may tailor light use to your exact specifications. The range includes models with 5.8GHz microwave or passive infrared (PIR) for movement sensing.





Once installed, the switch's daylight sensor measures ambient light levels. If light levels fall below the set limit, the motion sensor is activated. Upon detecting motion, the switch will turn the connected light on. When movement is no longer detected, the switch's adjustable on-timer delay will keep the light on for a designated period of time. Once this delay has expired, the switch turns the light off automatically.

Sensor Switches | Series Specifications

Model	ENSA-PS1	ENSA-PS2	ENSA-PS3	ENSA-PS4	ENSA-MS1	ENSA-MS2	ENSA-MS6	ENSA-MS8
Product Image								
Daylight Sensor	•	•	•	•	•	•	•	•
Passive Infrared Sensor	•	•	•					
Microwave Sensor				•	•	•	•	•
On-timer Delay	•	•	•	•	•	•	•	•
Electrical								
Input Voltage	220 ~ 240VAC 50Hz							
Power Consumption (Sensing Mode)	0.5W	0.4W	0.5W	0.5W	0.9W	0.9W	0.9W	1W
Max. Rated Load (Resistive/Inductive)	1200W / 300W	2000W / 1000W	800W / 400W	2000W / 1000W	500W / 200W	1200W / 300W	1200W / 300W	1200W / 800W
Detection Adjustments								
Daylight Sensing	3 ~ 2000 Lux							
Motion Detection Area	180° arc	360° rectangle	360° circle	360° circle	360° circle	360° circle	180° arc	5 ~ 150 lux 360° ceiling / 150° wall
Motion Detection Range	12m	4 x 20m	6m	20m	2 ~ 8m	1 ~ 8m	5 ~ 15m	15m
Motion Detection Speed	0.6 ~ 1.5m/s							
On-timer Delay	10s ~ 7min	10s ~ 30min	10s ~ 15min	10s ~ 30min	5s ~ 10min	10s ~ 12min	3s ~ 12min	5s ~ 30min
General								
Ingress Protection	IP65	IP20	IP20	IP65	Indoor use only	IP20	IP65	IP65
Operating Environment	-20 ~ 40°C / <93% Relative humidity							
Mounting Type	Wall/ceiling	Ceiling	Recessed ceiling	Ceiling	Wall/ceiling	Ceiling	Wall/ceiling	Wall / ceiling
Rec. Installation Height	1.8 ~ 2.5m	4 ~ 10m	2.2 ~ 4m	2.2 ~ 6m	1.8 ~ 3.5m	1.5 ~ 3.5m	1.5 ~ 3.5m	15m max.
Dimensions	80 x 120 x 50mm	100 x 100 x 50mm	Ø50 x 65mm	100 x 100 x 50mm	40 x 60 x 25mm	Ø100 x 40mm	80 x 120 x 50mm	Ø73 x 62mm

* Sensors switches must be installed by a licensed electrician.

Dusk / Dawn Switches | Series Specifications

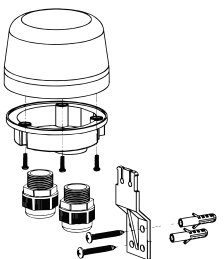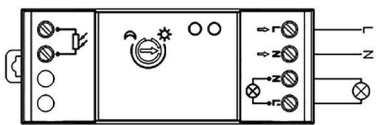Model	ENSA-LC1W	ENSA-LC3
Product Image		
Electrical		
Input Voltage	220 ~ 240VAC 50Hz	
Dimming Range	5 ~ 50 Lux	2 ~ 100 Lux
Rated Current	10A	20A
General		
Ingress Protection	IP65	IP65 (photocell only)
Operating Environment	-20 ~ 40°C / <93% Relative humidity	
Recommended Install	Place above light	Switchboard enclosure/cabinet
Dimensions	Ø82 x 108mm	35 x 66 x 90mm (1m cable)
Diagrams		
Dimensions		

* Sensors switches must be installed by a licensed electrician.



2 Channel Mains Voltage Receiver (433.92MHz)


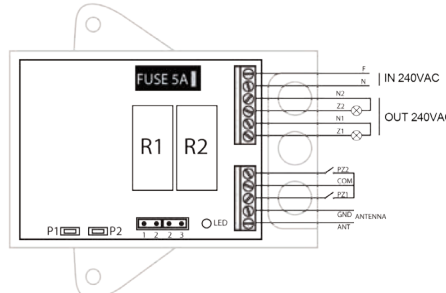
ENSA-RS Series: Trigger lights automatically by connecting to universal transmitters

Automate your LED lighting with the ENSA-RS1 2 channel 240VAC mains voltage RF receiver. With a maximum rated load of up to 1000W, you can integrate wireless triggering for a large number of lights via this receiver. The receiver shell is IP55 rated and suitable for external use.

The ENSA-RS1 includes two keyfobs for light control. The receiver can also be triggered by up to 128 universal transmitters. This includes wireless passive infrared detectors, beam/curtain detectors and door/window reed switches. This makes the ENSA-RS1 ideal for effective security lighting applications.

Contact your local ENSA™ professional for more information on universal wireless detector integration. Wireless transmitters are optional and sold separately.

Wireless Receiver | Series Specifications

Model	ENSA-RS1
Product Image	
Frequency	433.92MHz fixed code
Range (LoS)	100m
Programmable Outputs	2 relay outputs (latched or timed)
Maximum Codes	128
Electrical	
Input Voltage	240VAC 50 ~ 60Hz
Maximum Rated Load	1000W
General	
Ingress Protection	IP55
Included Remotes	2
Operating Environment	-20 ~ 55°C
Diagram	

Universal Transmitters | Additional Information



The ENSA-RS1 can be configured to have up to 128 universal transmitters. It is compatible with a wide range of wireless sensors, including:

- **Wireless reed & roller shutter reed switches:** Ideal for trigger lights on open/close, garages, sheds, warehouses, halls, on windows etc.
- **Passive infrared detectors:** Standard pet immune, ceiling mount and solar powered external sensors; perfect for triggering lights on general motion detection. Great for energy saving in intermittent people traffic areas.
- **Infrared beam presence detector:** Ideal for wireless curtain beam detection, eg: gates, walkways, corridors, fences, etc.

Glossary

Color Rendering

A general expression for the effect of a light source on the color appearance of objects.

Color Rendering Index (CRI)

A measure of the degree of color shift objects undergo when illuminated by the light source as compared with those same objects when illuminated by a reference source of comparable color temperature. The reference source has a CRI of 100.

Correlated Color Temperature (CCT)

The absolute temperature of a blackbody whose chromaticity most nearly resembles that of the light source. Usually specified in Kelvin (K). The lower the Kelvin temperature, the warmer the light feels, or appears.

Diffuser

An object with irregularities on a surface causing scattered reflections.

Digital Addressable Lighting Interface (DALI)

A digital communications protocol for controlling and dimming lighting fixtures, originally developed in Europe.

Driver

An electronic circuit that converts input power into a current source — a source in which current remains constant despite fluctuations in voltage. An LED driver protects LEDs from normal voltage fluctuations, overvoltages, and voltage spikes.

Efficacy

The light output of a light source divided by the total electrical power input to that source, expressed in lumens per watt (lm/W).

Energy Saving Scheme (ESS)

The IPART New South Wales Energy Saving Scheme aims to reduce electricity consumption by creating financial incentives for organisations in the form of energy saving certificates.

Halogen Lamp

A type of incandescent lamp that has a small amount of a halogen such as iodine or bromine added. The addition of the halogen aims to increase the lifespan and clarity of the tungsten filament creating the light.

Heat Sink

A part of the thermal system that conducts or convects heat away from sensitive components, such as LEDs and electronics.

High Intensity Discharge (HID) Lamps

A type of electrical gas-discharge lamp which produces light by means of electric arc in a tube filled with gas & metal salts. Types of HID lamps include high-pressure sodium (HPS), mercury-vapour, metal halide, ceramic metal-halide & xenon short arc.

Illuminance

The intensity of light falling on a surface area. If measured in square meters, the unit of illuminance is lux (lx).

Incandescent Lamp

A type of lamp that produces light by heating a filament wire to a hot temperature by passing an electric current through it.

Kelvin Temperature

Term and symbol (K) used to indicate the comparative color appearance of a light source when compared to a theoretical blackbody. Yellowish incandescent lamps are 3000K. Fluorescent light sources range from 3000K to 7500K and higher.

Light Emitting Diode (LED)

A Light Emitting Diode (LED) is a solid-state semiconductor device that converts electrical energy directly into light.

Lumen

The SI unit of luminous flux, equal to the amount of light emitted per second in a unit solid angle of one steradian from a uniform source of one candela.

Lumen Depreciation

Describes the percentage of light lost relative to the initial lumen output.

Luminous Flux

Luminous flux is the measure of the perceived power of light, adjusted to reflect the varying sensitivity of the human eye to different wavelengths of light

Lux (lx)

The SI unit of illuminance, or luminous flux incident on a unit area, frequently defined as one lumen per square meter (lm/m²).

Power Factor

The active power divided by the apparent power (i.e., product of the rms input voltage and rms input current of a driver).

Thermal Resistance (K/W)

The property of a material's ability to conduct heat.

Unified Glare Rating (UGR)

The number defining glare using luminance of a lamp divided by the background visible luminance of a room. Ranging from 5 to 40, lower numbers mean less glare.

Watt (W)

The unit of electrical power as used by an electrical device during its operation. Many lamps come with rating in watts to indicate their power consumption.



Join us in bringing energy efficiency to the world.

By becoming an ENSA practical energy efficiency solutions authorised reseller. If you are interested in distributing ENSA LED lighting and energy saving devices, visit www.ensalife.com for more information.

Energy Saving Devices

[illegible]

www.ensalife.com

