12.0 Megapixel Infrared Motorised Bullet

Model: VSIP12MPFBIRM





The best in image resolution and professional features in a single camera. Be amazed with broadcast quality Ultra HD resolution video, streamed in real-time up to 15Mbps.

Camera Features

- Stream Ultra HD 12 megapixel (4000x3000) at 15fps
- 4.1 ~ 16.4mm motorised lens with 84.5 ~ 34° viewing angles
- Day/night (auto ICR) with 50m maximum infrared range
- Digital wide dynamic range with back/highlight compensation
- 3D digital noise reduction and auto white balance
- MicroSD card slot for at-the-edge recording, up to 128GB
- Audio and alarm interface input/output; BNC video output
- Supports triple stream and smart detection technologies
- IP67 weather resistant housing for external use
- ONVIF, PSIA and CGI compliance

Compatible Accessories

Sold separately. Adapters may be required, check compatibility list for details.








VSBKTA121

VSBKTA152

VSBKTA151

Model		VSIP12MPFBIRM
General		
Camera Style		Weather Resistant Bullet
Image Sensor		1/1.7" 12.0 Megapixel Progressive Scan CMOS
Effective Pixels		4000 (H) x 3000 (V)
Signal Noise Ratio		> 50dB
Camera		
Lens		4.1 ~ 16.4mm F1.53 Motorised Lens with Auto Iris (DC)
Angle of View		84.5° (wide) ~ 34° (tele)
Electronic Shutter		Auto / Manual (1/3 ~ 1/100000s)
Minimum Illumination		0.05 Lux at F1.4 (Colour) / 0 Lux at F1.4 (IR on)
Day/Night		Auto (ICR) / Colour / B&W
White Balance		Auto / Sunny / Night / Outdoor / Customised
Noise Reduction		3D Digital Noise Reduction
Gain Control		Auto / Manual
Backlight Compensation		BLC / HLC / DWDR
Audio Input		1 ch. Input / 1 ch. Output
Audio Compression		G.711a / G.711u / AAC
Alarm Interface		2 ch. input / 1 ch. output
Network Interface		RJ45 (10/100/1000 Base-T)
Memory Slot		MicroSD slot up to 128GB
Bit Rate		H.264: 32K ~ 16Mbps
ONVIF Conformance		ONVIF, PSIA, CGI Compliant
Smart Functions		Tripwire / Intrusion / Scene Change / Face Detection / Missing & Abandoned Object / Audi & Defocus Detect
Video		
Video Compression		H.264/H.264B/H.264H/ MJPEG
Resolution		Configurable from 12.0MP (4000 x 3000) to CIF (352 x 288)
Frame Rate	Main	12.0MP (1 ~ 15fps) / 8.0MP and lower (1~25/30fps)
	Sub	D1 and lower (1 ~ 25fps)
	Third	1080p and lower (1 ~ 25fps)
Video Output		1 channel, BNC (1.0Vp-p, 75 ohm)
Environment		
Ingress Protection		IP67
Vandal Resistant		N/A
Maximum Infrared Range		50m
Power Input		12VDC / 24VAC / PoE (802.3at)
Power Consumption		< 24W
Dimensions		273 x 95 x 95mm
Weight		0.8kg
Operating Environment		-30° to 60°C / RH95% (max)
Draduct Dimensions		

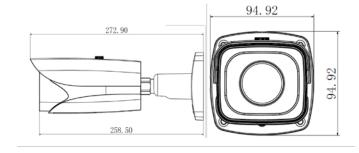

Your local VIP Vision™ professional: