


Camera & security light in one.


Professional AI Series: Motorised AI vandal dome in 4.0MP, 6.0MP & 8.0MP

The Professional AI CCTV camera I3 range combines the latest in AI surveillance and a security light into one housing. During AI people and vehicle detection events, the camera will trigger a warm LED light to deter intruders and capture footage in full colour. Quickly search and track people & vehicles throughout entire sites across all Acupick CCTV cameras in your security system.


- Stream up to 8.0MP (3840 x 2160) at 25fps
- Up to 50m infrared range; true day/night (auto ICR)
- Intelligent search across all Acupick cameras
- Warm LED light triggers on person/vehicle detection
- H.265+ encoding for efficient storage & streaming
- Back/highlight compensation & true WDR (120dB)
- MicroSD slot for recording at the edge up to 512GB
- AI weather and anti-flicker scene self-adaption
- Next-Gen Smart Motion Detection (SMD 4.0) & Perimeter Protection to prevent false alarms, using VIP Vision NVRs

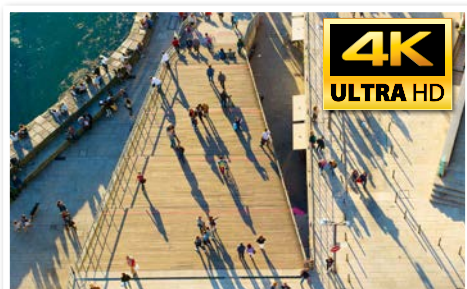

Record up to 4K in Real Time

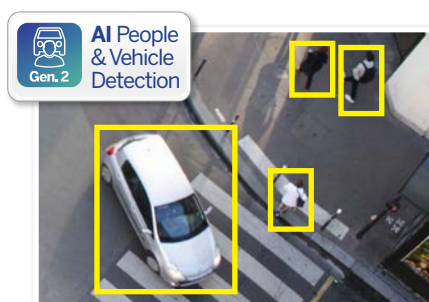


AI Human & Vehicle Detection

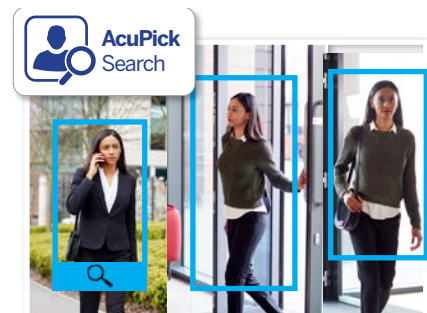

Intelligent people & vehicle search

Specifications		4.0MP Motorised AI Vandal Dome	6.0MP Motorised AI Vandal Dome	8.0MP Motorised AI Vandal Dome		
Ordering Information		VSIPP-4DIRMD-I3	VSIPP-6DIRMD-I3	VSIPP-8DIRMD-I3		
Camera	Image Sensor	1/2.9" 4.0MP Progressive Scan CMOS		1/2.7" 8.0MP Progressive Scan CMOS		
	Effective Pixels	2688 (H) x 1520 (V)		3288 (H) x 1850 (V)		
	RAM / ROM	1GB / 256MB				
	Min Illumination	0.005 Lux/F1.4 (Color), 0.0005 Lux/F1.4 (B/W), 0 lux (illuminator on)	0.007 Lux/F1.4 (Color), 0.0007 Lux/F1.4 (B/W), 0 lux (illuminator on)	0.007 Lux/F1.4 (Color), 0.0007 Lux/F1.4 (B/W), 0 lux (illuminator on)		
	S/N Ratio	> 56dB				
	Illuminator	4x warm LED light, 4 x Infrared LED, 50m range, auto/manual on/off control				
Lens	Lens / Iris	2.7 ~ 13.5mm F1.4 Motorised Varifocal Lens with Fixed Iris				
	Field of View	Horizontal: 104°~29°, Vertical: 54°~16°	Horizontal: 114°~32°, Vertical: 58°~17°	Horizontal: 114°~32°, Vertical: 58°~17°		
	Focus	Auto Focus / 0.1m Min. Focus Distance				
DORI	Detect (25px/m)	64m (wide) / 210m (tele)	85m (wide) / 280m (tele)	85m (wide) / 280m (tele)		
	Observe (63px/m)	26m (wide) / 84m (tele)	34m (wide) / 112m (tele)	34m (wide) / 112m (tele)		
	Recognise (125px/m)	13m (wide) / 42m (tele)	17m (wide) / 56m (tele)	17m (wide) / 56m (tele)		
	Identify (250px/m)	6m (wide) / 21m (tele)	8m (wide) / 28m (tele)	8m (wide) / 28m (tele)		
Video	Resolution		4.0MP (2688 x 1520) to CIF (352 x 288)		6.0MP (3288 x 1850) to CIF (352 x 288)	8.0MP (3840 x 2160) to CIF (352 x 288)
	Frame Rate	Main	4.0MP (1 ~ 25fps)		6.0MP (1 ~ 25fps)	8.0MP (1 ~ 25fps)
		Sub	1080p (1 ~ 25fps)			
		Third	1080p (1 ~ 25fps)			
	Video Compression		H.265; H.264; H.264H; H.264B; MJPEG; Smart H.265+; Smart H.264+; AI H.265; AI H.264			
	Bit Rate		H.265: 3 ~ 16384 Kbps / H.264: 3 ~ 16384 Kbps			
	Bit Rate Control		Constant bit rate (CBR) / Variable bit rate (VBR)			
	Day/Night		Auto (ICR) / Color / B&W			
	Lighting Compensation		BLC / HLC / WDR (120dB) / AI SSA			
	White Balance		Auto / Natural / Street Lamp / Outdoor / Manual / Regional Custom			
	Gain Control		Auto			
	Noise Reduction		3D NR			
Picture Control		Mirror / Flip (0°, 90°, 180°, 270°) (support 90°/270° with 4.0MP resolution and lower)				
IVS	Video Functions		Motion Detection (4 zones), Region of Interest (4 zones), Privacy Masking (8 zones), Smart Infrared			
	AI Functions		Smart Motion Detection (SMD 4.0): People and vehicle detection using motion detection Perimeter Protection: People and vehicle detection using tripwire or intrusion rules Acupick: Search by people/vehicle attribute (e.g colour) and track their movements			
	Intelligent search		Search people or vehicle detection events (SMD 4.0, Perimeter Protection)			
Network	Ethernet		RJ-45 (10/100Base-T)			
	Protocol		IPv4; IPv6; HTTP; TCP; UDP; ARP; RTP; RTSP; RTCP; RTMP; SMTP; FTP; SFTP; DHCP; DNS; DDNS; QoS; UPnP; NTP; Multicast; ICMP; IGMP; NFS; SAMBA; PPPoE; SNMP; P2P			
	Streaming Method		Multicast			
	Max. User Access		20 Users			
Interface	Video Interface		N/A			
	Audio Interface		Built-in Mic / 1 input (RCA Port) / 1 output (RCA Port) / Audio Compression - G.711a; G.711Mu; PCM; G.726; G.723			
	Alarm Interface		1 channel in: 3- 5mA 5VDC / 1 channel out: 300mA 12VDC			
	Edge Storage		MicroSD Card (up to 512GB) / NAS / FTP / SFTP			
	Interoperability		ONVIF (Profile S & Profile G & Profile T & Profile M); CGI			
Environmental	Power Supply		12VDC / PoE (802.3af)			
	Power Consumption		Max <8.2W (12VDC), <11W (PoE)	Max <9.2W (12VDC), <11.3W (PoE)	Max <9.2W (12VDC), <11.3W (PoE)	
	Operating Conditions		-30°C ~ +60°C, ≤95% RH			
	Ingress Protection		IP67			
	Vandal Resistance		IK10			
	Housing		Metal			
	Pan/Tilt/Rotation		Pan: 0° ~ 355°, Tilt: 0° ~ 80°, Rotation: 0° ~ 355°			
	Dimensions		Ø122mm x 94mm			
	Net Weight		0.56kg			
Application						

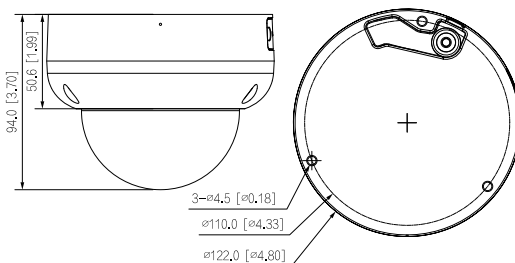

Junction Box	Wall Mount	Ceiling Mount
VSBKTA137 or VSBKTA123-2	VSBKTB206W or VSBKTA109 + VSBKTB305W	VSBKTA109 + VSBKTB220C
Corner Mount		Pole Mount
VSBKTA109 + VSBKTB305W + VSBKTA151		VSBKTA109 + VSBKTB305W + VSBKTA150

Your local VIP Vision™ IP solutions professional: