

AV1300 Gigabit Passthrough Powerline ac Wi-Fi Kit

AC1350 Wi-Fi for the Whole Home







Highlights

Fast Dual Band Wi-Fi for Every Need in Every Room

450Mbps (2.4GHz) is ideal for browsing the web and video chatting, while 867Mbps (5GHz) is perfect for HD streaming and lag-free gaming.

2 × 2 MIMO for More Throughput over Powerline

2 × 2 MIMO technology is like adding an extra lane on a highway. It establishes multiple simultaneous connections so you can enjoy 2× faster, more stable powerline speeds.







Highlights


Wi-Fi Auto-Sync for Unified Wi-Fi Network

Simply set up a Wi-Fi network and apply any changes across all powerline adapters with Wi-Fi Clone and Wi-Fi Move.



HomePlug AV2 Standard Compliant

HomePlug AV2 provides users with stable, high-speed data transfer rates of up to 1300Mbps on a line length of up to 300 meters.

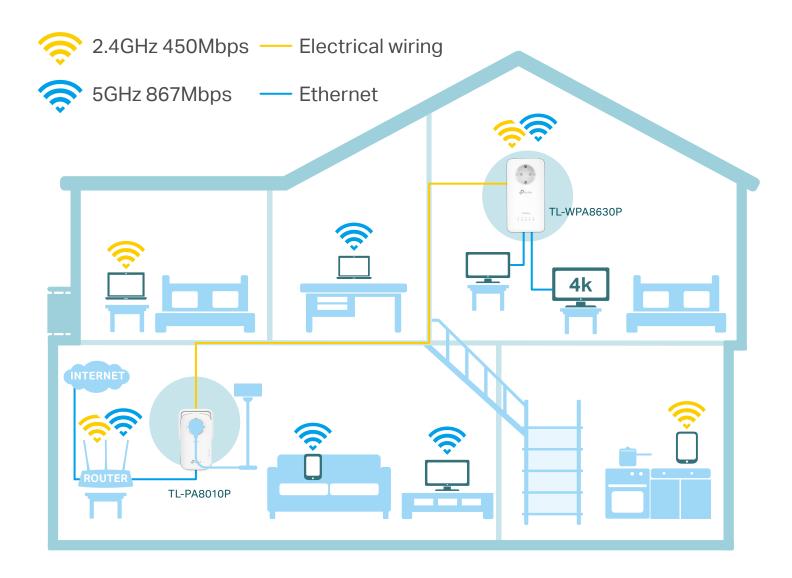


Features



- HomePlug AV2 Provides up to 1300Mbps high speed data transmission over a home's existing electrical wiring
- Wireless AC Standard Dual-band Wi-Fi speeds of 450Mbps on the 2.4GHz band and 867Mbps on the 5GHz band
- Multiple Gigabit Ports Three gigabit ethernet ports for game consoles, smart TVs, or media receivers



• Expansive Coverage – Utilizes any household power circuit to deliver data over distances of up to 300 meters



- 2X2 MIMO Establishes simultaneous connections, providing more stable connections and expansive coverage
- Mains Filter The integrated mains filter reduces electrical noise interference and improves powerline communication performance.



- Wi-Fi Clone Allows powerline extenders to copy the network name (SSID) and password from your router with one simple touch
- · Wi-Fi Move Automatically adopts Wi-Fi settings from your existing powerline network
- TP-Link tpPLC Easily manage your network using the intuitive tpPLC App or the tpPLC Utility
- Plug, Pair, and Play Set up your powerline network in minutes



- Pair Button Provides a connection with 128-bit AES encryption, at the touch of "Pair" button
- Parental Controls
 – Manage when and how connected devices can access the internet

Specifications

Hardware

· Transmission Speeds:

Powerline: up to 1300 Mbps Ethernet: 10/100/1000 Mbps

· Standards and Protocols:

HomePlug AV2, IEEE 1901, IEEE 802.3, IEEE 802.3u, IEEE 802.11b/g/n (2.4GHz), IEEE 802.11a/n/ac (5GHz)

· Interface: 3 Gigabit Ethernet Ports

· Button: Pair, LED On/Off, Wi-Fi/Wi-Fi Clone, Reset

· LED Indicator: Power, Powerline, Ethernet, Wi-Fi (2.4GHz), Wi-Fi (5GHz)

· Dimensions (W x D x H):

TL-WPA8630P: 6.0 × 3.0 × 1.7 in. (152 × 75 × 42 mm) TL-PA8010P: 5.2 × 2.8 × 1.7 in. (131 × 72 × 42 mm)


· IGMP: IGMP v1/v2/v3

· Power Consumption:

Maximum: 13.7W
Typical: 11W
Standby: 7W

· Range: Up to 300 meters/1000 feet over existing electrical wiring

· Compatibility: Compatible with all HomePlug AV & HomePlug AV2 standard powerline adapters

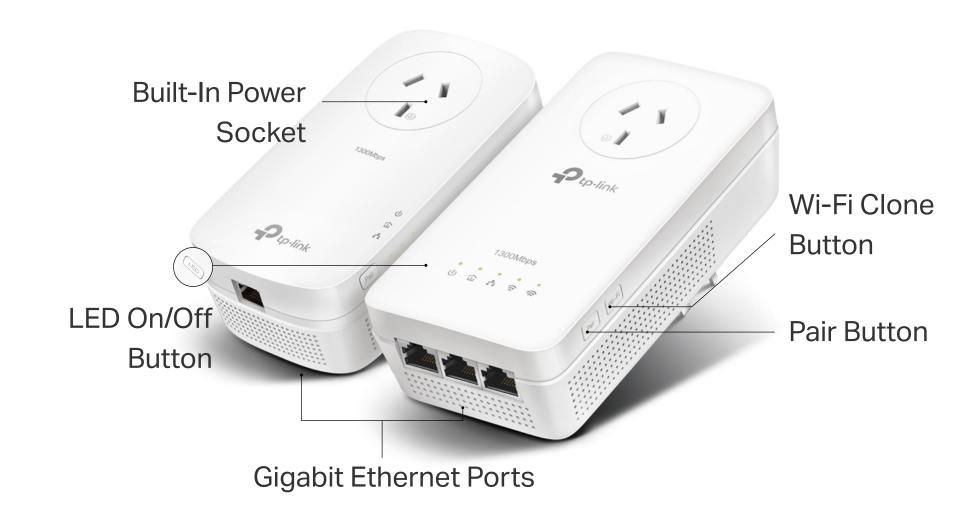

Specifications

Software

- · Modulation Technology: OFDM
- Security: Wireless: WPA-PSK/WPA2-PSK, WEP Encryptions, Powerline: 128-bit AES Encryption
- Management Tools:
 Scan the QR code to download TP-Link tpPLC App







Or download new tpPLC Utility on PCs: www.tp-link.com.



■ **法禁** For more information, please visit

http://www.tp-link.com/en/products/details/?model=TL-WPA8630P+KIT

or scan the QR code on the left

* Listed AV and Wi-Fi speeds refer to the theoretical maximum physical-layer data transfer rate. Actual data speeds vary and are influenced by the home's Wi-Fi/electrical/physical environment, and if adapters are placed on the same home circuit.

Specifications are subject to change without notice. TP-Link Technologies Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. Copyright ©2017 TP-Link Technologies Co., Ltd. All rights reserved.

Others

· Package Contents

AV1300 Gigabit Passthrough Powerline ac Wi-Fi Kit: TL-WPA8630P & TL-PA8010P

Ethernet Cable x 2

Quick Installation Guide

· Certification

CE, RoHS

· System Requirements

Windows 10/8.1/8/7/Vista/XP, Mac OS, Linux

· System Requirements for tpPLC Utility

Windows 10/8.1/8/7/Vista/XP and Mac OS X (10.7 or later)

Environment

Operating Temperature: 0°C~40°C (32°F~104°F)

Storage Temperature: -40°C~70°C (-40°F~158°F)

Operating Humidity: 10%~90% non-condensing

Storage Humidity: 5%~90% non-condensing